Uncontrolled Copy

037613ME

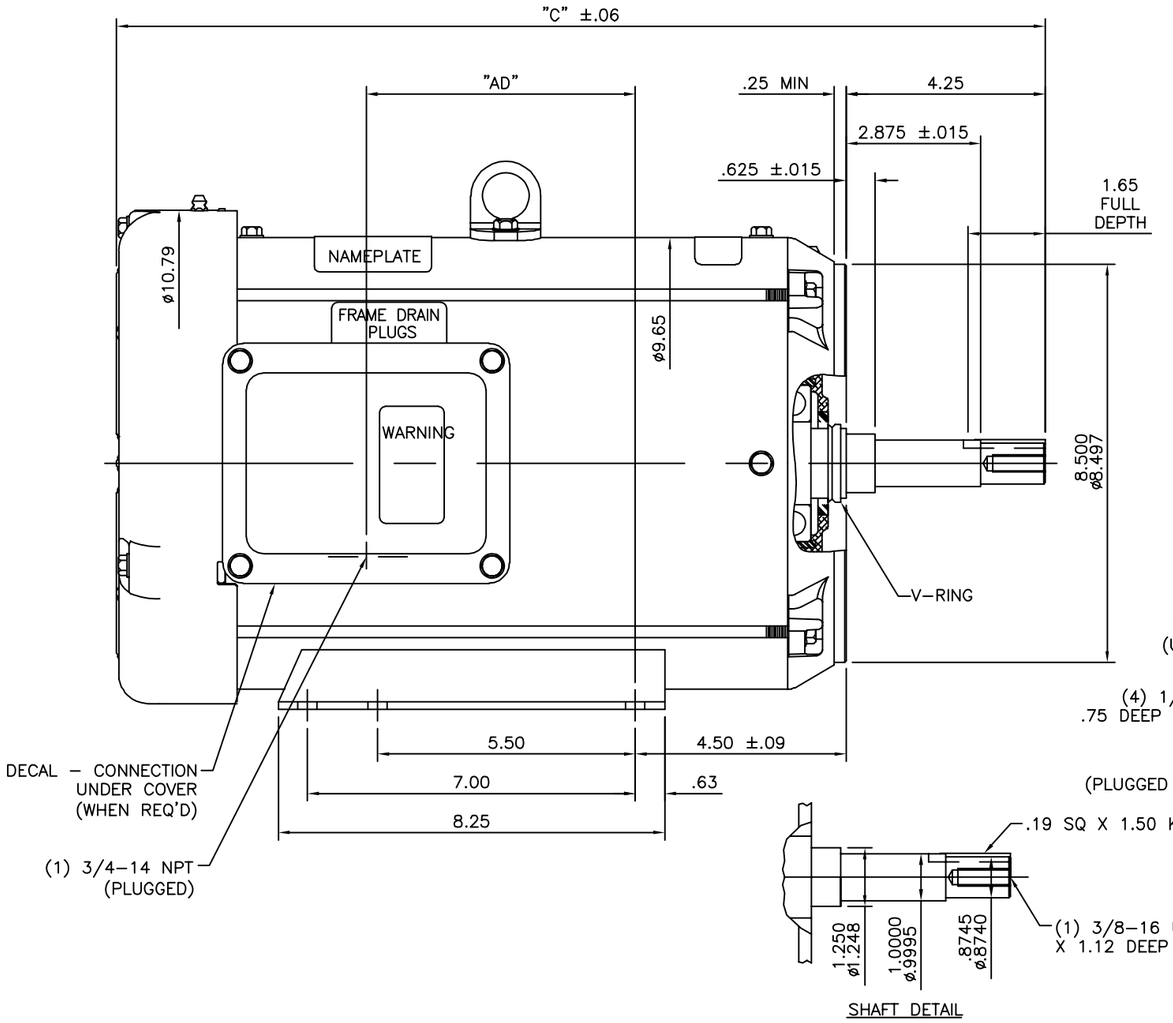

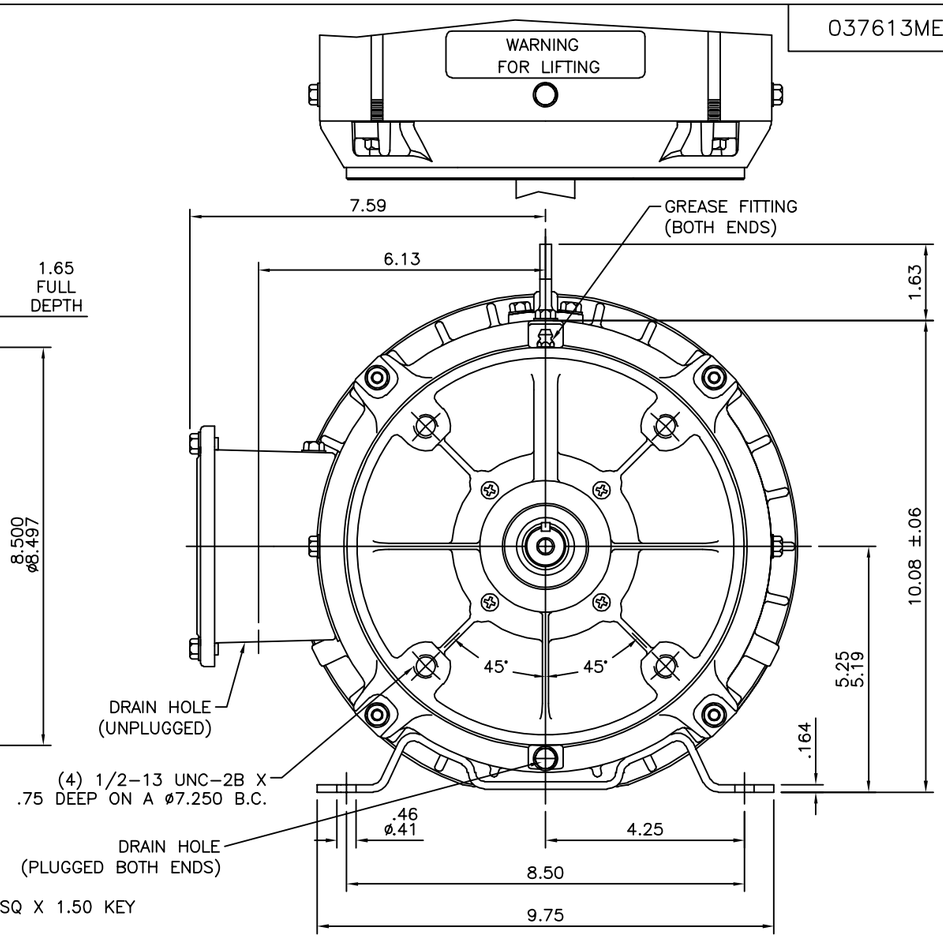

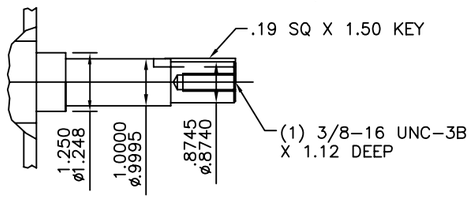

SHAFT DETAIL

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
MAXIMUM PILOT ECCENTRICITY TO BE .004 T.I.R.
PERMISSIBLE SHAFT RUNOUT TO BE .002 T.I.R.
ALIGN BASE TO C-FACE MOUNTING HOLES WITHIN ±1/16"

SPECIAL FEATURES:

BUNA-N GASKETS THROUGHOUT
SHAFT SEALS – BOTH ENDS OF MOTOR
V-RING AT SHAFT END OF MOTOR
STAINLESS STEEL SHAFT, NAMEPLATE & HARDWARE

DASH NO.	"C"	"AD"
1100	19.00	4.75
1150	19.50	5.25
1200	20.00	5.75
1250	20.50	6.25
1300	21.00	6.75
1350	21.50	7.25

NO.	REVISION	BY & DATE	CHK
A	CREATED NEW OUTLINE PER ECO-0047297	UD 03/12/14	JD

TOLERANCES UNLESS SPECIFIED

DEC.	INCHES
.X	±.1
.XX	±.03
.XXX	±.005
.XXXX	±.0005
ANG	±1/2°

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT

MARATHON ELECTRIC

DRAWN	UD 03/12/14
CHK	JD 03/12/14
APPD	
SCALE	3=8
REF	037613ME
FMF	
PREV	
TITLE	OUTLINE– 210JM FRAME TEFC– RIGID "C"
MAT'L.	WASHGUARD
FINISH	
CAD FILE	037613ME
RFP	
DIST	

SIZE	DRAWING NO.	REV.
B	037613ME	A