


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEHE	250	186	8	CDNT.	380	50	750

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

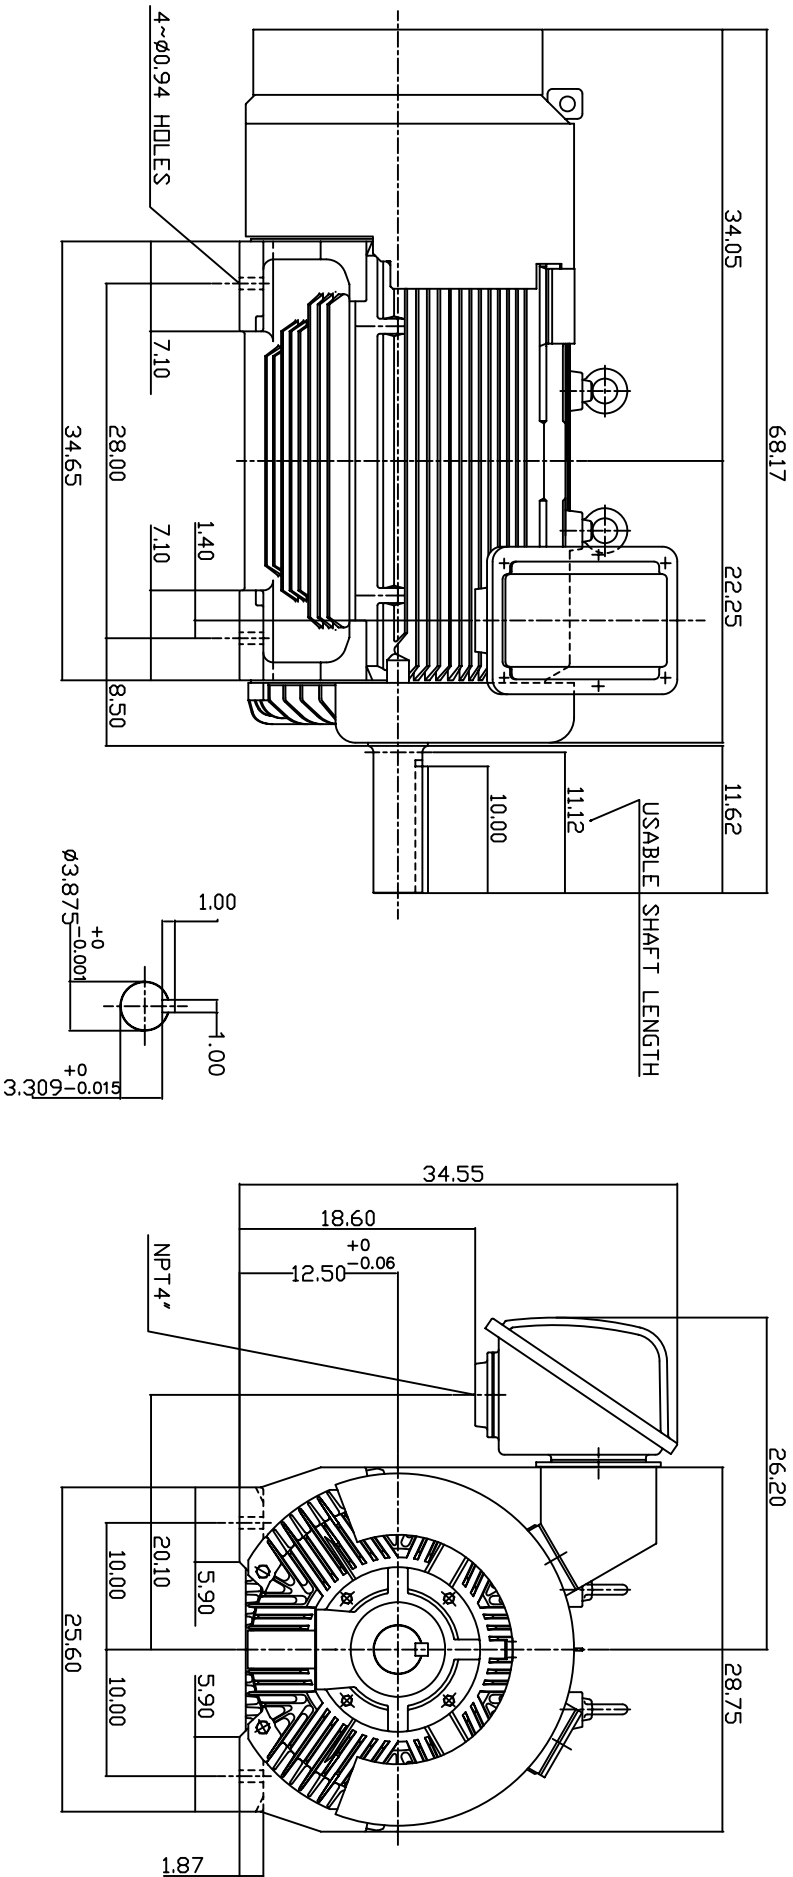

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 5009C
3. F CLASS INSULATION, S.F.1.0
4. FOR BELT DRIVE APPLICATION
5. BEARING SIZE: DRIVE END: NU324  
NON-DRIVE END: 6320
6. MOTOR APPROX. WEIGHT: 4000 LBS

TV-56C

DWN.	W.LLIN	DATE
CHKD.	W.LLIN	MAR-03-2003
APPD.	C.WANG	MAR-03-2003

DATE	DESCRIPTION
APRIL 23, 2004	CATALOG NO. E2508R-50

OUTLINE DIMENSIONS  
3-PHASE INDUCTION MOTOR



DWG NO. 3A040T179  
REV: 00