PRODUCT INFORMATION PACKET



Model No: C4D17VK26A
Catalog No: 109067.00

1/3HP.1750RPM.US56C.TENV.180V.CONT.40C.1.0SF.RIGID C.DC WASHGUARD ALL-STAINLESS.C4D17VK26A
NEMA



Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	0.33 Hp	Output KW	0.25 kW
Voltage	180 V	Current	1.9 A
Speed	1750 rpm	Service Factor	1
Efficiency	73.7 %	Duty	Continuous
Insulation Class	F	Frame	US56C
Enclosure	Totally Enclosed Non Ventilated	Overload Protector	No
Ambient Temperature	40 °C	Drive End Bearing Size	6205
Opp Drive End Bearing Size	6203	UL	Recognized
CSA	Υ	CE	N


Technical Specifications

Rotation	Reversible	Mounting	Rigid C base
Overall Length	12.81 in	Frame Length	7.25 in
Shaft Diameter	0.625 in	Shaft Extension	2.05 in
Outline Drawing	031740-US56C	Connection Diagram	005487

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 10/15/2018

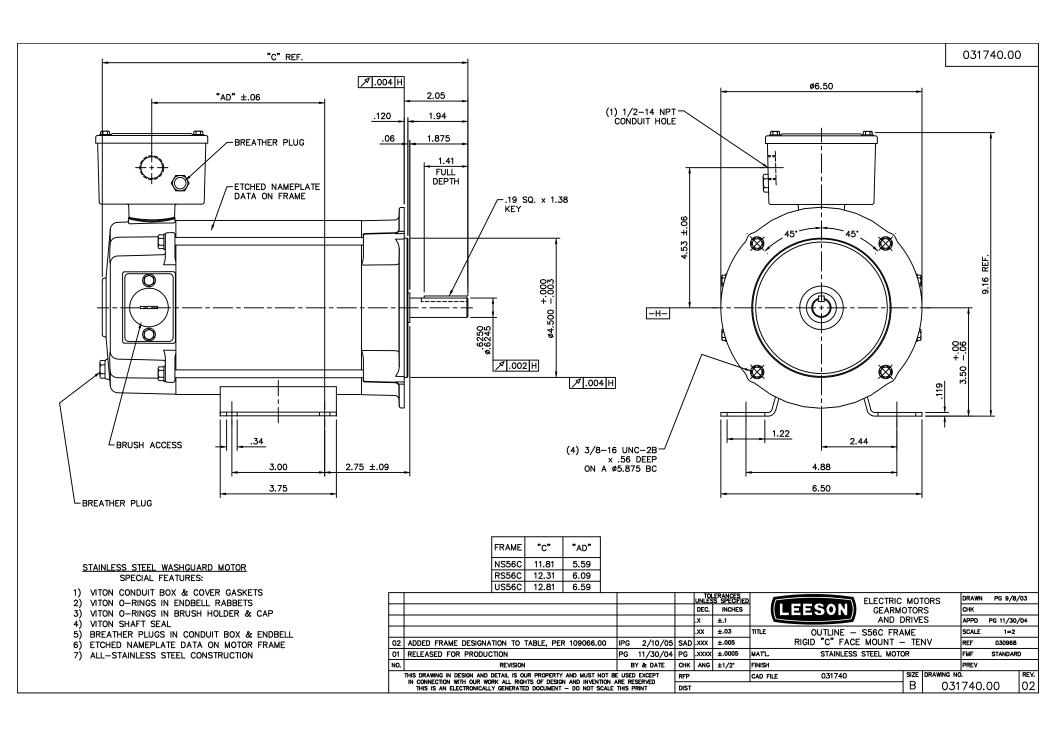



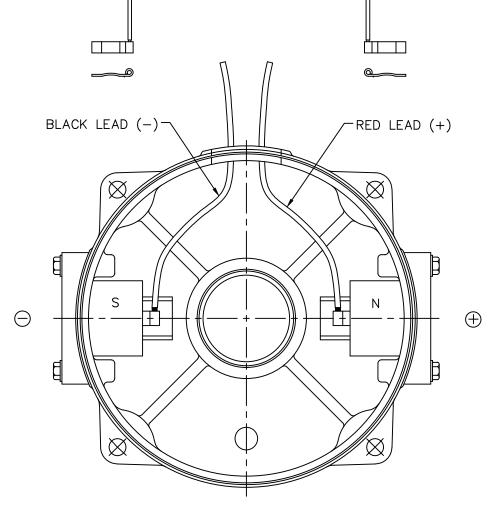

EXTERNAL CONNECTIONS FOR CCWLE ROTATION VIEWING LEAD END OF MOTOR WITH RED LEAD POSITIVE AND BLACK LEAD NEGATIVE. FOR CW ROTATION, REVERSE POLARITY.

			1	ТО	LERANCES SS SPECIFIED						DRAWN	PG 12/10	7/04
								ELECTRIC MOTORS		TORS	DRAWN	<u> PG 12/10</u>	3/04
				DEC.	INCHES			GEARMOTORS		FORS CHK			
				.x	±.1		AND [DRIVES		APPD	PG 12/10,	/04
				.xx	±.01	TITLE	WIRING DIAGRAM PMDC MOTOR				SCALE	5=8	
				.xxx	±.005					REF			
				.xxxx	±.0005	MAT'L.					FMF	109075.0	0
NO.	REVISION	BY & DATE	снк	ANG	±1/2°	FINISH				PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT			RFP			CAD FILE	005487		SIZE	DRAWING NO).		REV.
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT			DIST			1			Α	005	5487	.01	