


PRODUCT INFORMATION PACKET



Model No: SRF2S0.75TC61
Catalog No: LM24134
3/4,3450,TEFC,56C,3/60/208-230/460
Totally Enclosed Fan Cooled (TEFC)

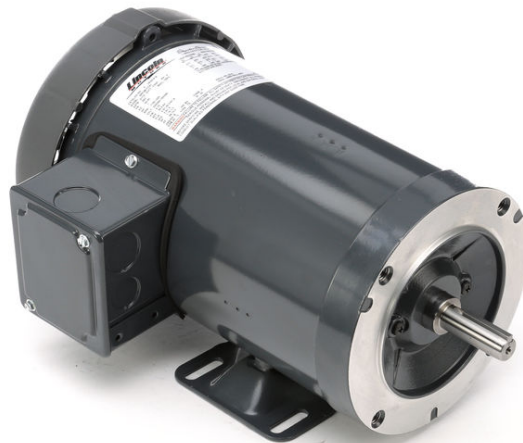

Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	0.75 Hp	Output KW	0.56 kW
Frequency	60 Hz	Voltage	230/460 V
Current	3.2/1.6 A	Speed	3450 rpm
Service Factor	1.15	Phase	3
Efficiency	74 %	Duty	Continuous
Insulation Class	F	Design Code	B
KVA Code	N	Frame	56
Enclosure	Totally Enclosed Fan Cooled	Overload Protector	No
Ambient Temperature	40 °C	Drive End Bearing Size	203
Opp Drive End Bearing Size	203	UL	Recognized
CSA	Y	CE	N
IP Code	43		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Mounting	Rigid base	Motor Orientation	HORIZONTAL
Drive End Bearing	BALL	Opp Drive End Bearing	BALL
Frame Material	Rolled Steel	Shaft Type	NEMA 56
Overall Length	11.81 in	Frame Length	6.56 in
Shaft Diameter	0.625 in	Shaft Extension	1.88 in
Assembly/Box Mounting	F1 ONLY		
Outline Drawing	A-100110LN-656	Connection Diagram	A-EE7308-LN


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 10/15/2018

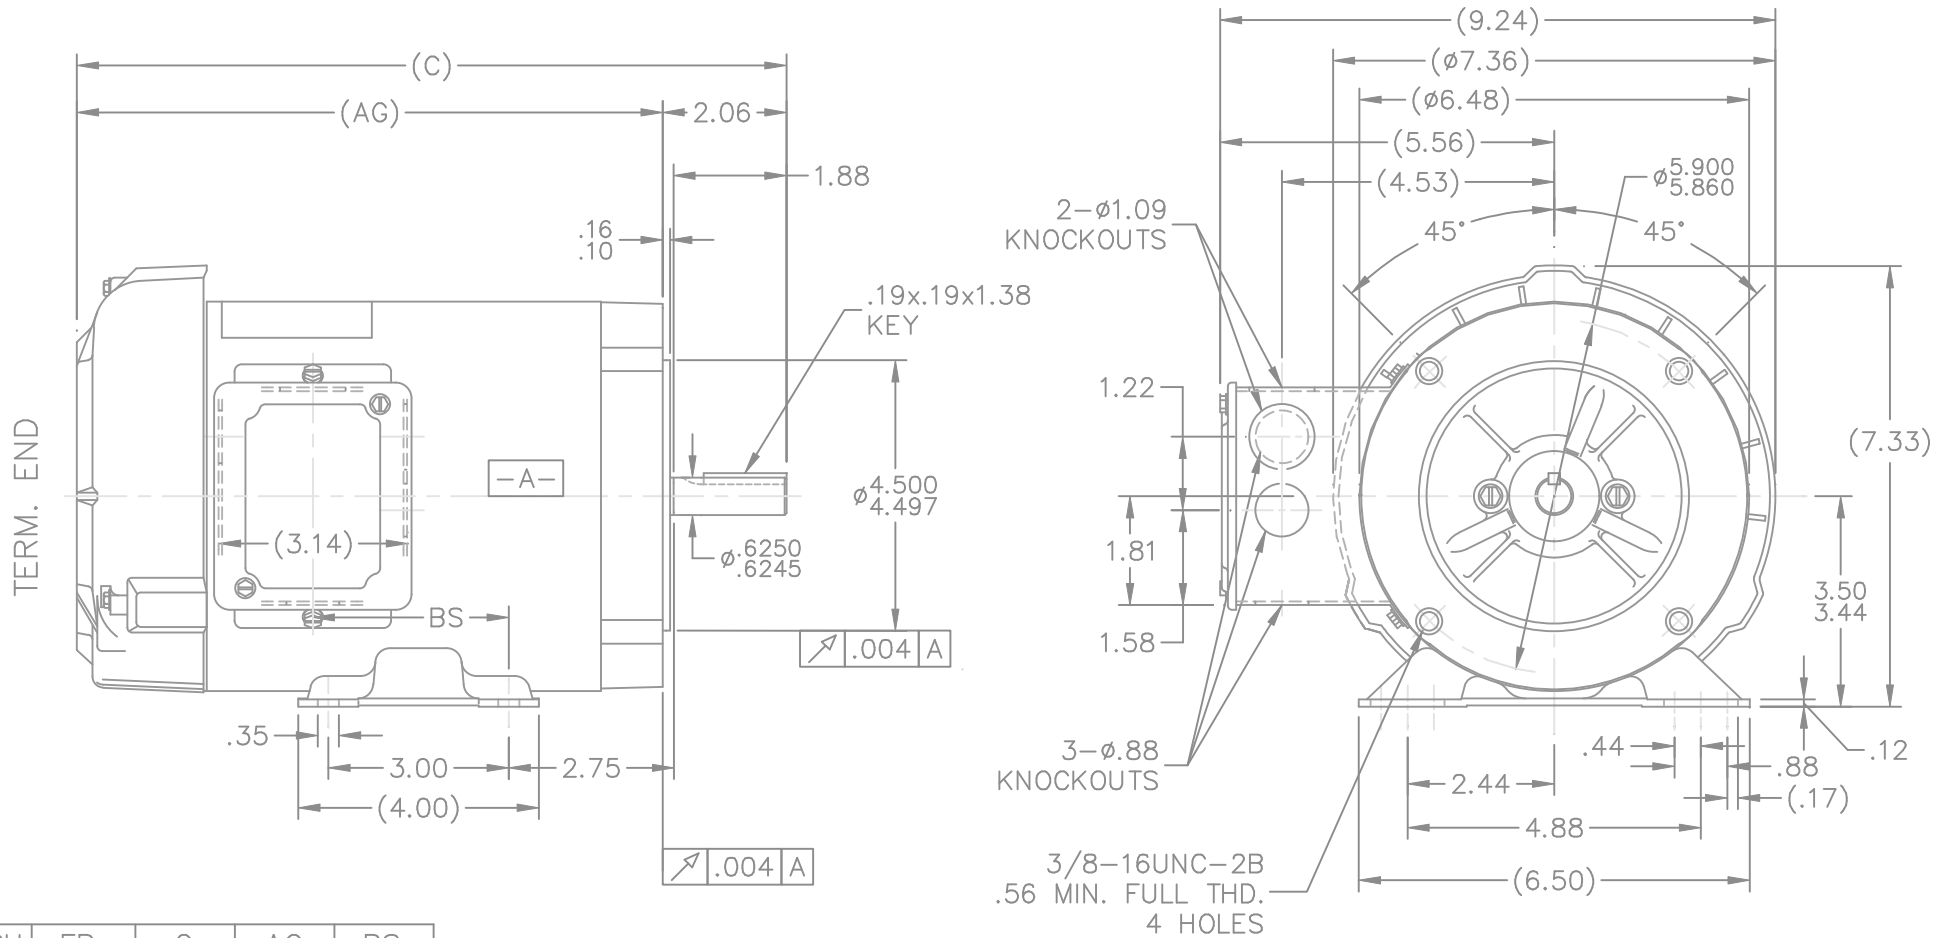

- NOTES:
1. CONDUIT BOX CAN BE ROTATED 180°.
 2. NAMEPLATE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	AG	BS
606	56-60	11.31	9.25	2.75
656	56-65	11.81	9.75	3.25
706	56-70	12.31	10.25	3.75
756	56-75	12.81	10.75	4.25

06-01-2000

				TOLERANCES UNLESS SPECIFIED			DRAWN BLR 06-10-1999			
				DEC.	INCHES		CHK ML 06-18-1999	APPD GK 06-18-1999		
				.X	±.1	TITLE OUTLINE 56 FRAME - TEFC - C'FACE	SCALE 5=16	REF		
2	ADDED NAMEPLATE LOC.	CN27400-296	BLR 08-05-1999	.XXX	±.005		MAT'L.	FMF	PREV	
1	NEW DRAWING		BLR 06-18-1999	.XXXX	±.0005	FINISH				
NO.	REVISION	BY & DATE	CHK	ANG	±'30"					
			RFP	06-18-1999		CAD FILE 100110ln	SIZE A	DRAWING NO. 100110LN	PAGE 1 OF 1	REV. 2
			DIST	WP						

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

THREE PHASE
DUAL VOLTAGE MOTOR

HIGH VOLTAGE



LOW VOLTAGE



REF.
WINDING DIAGRAM

T8Y, T2Y, T2BL, T4BX, T2EC, T2G
T6BZ, T2B, T6BL, T4AV, T6B, T4B

OPTIONAL CORD
CONNECTION

L1 — WHITE
L2 — RED
L3 — BLACK


NO.	REVISION	BY & DATE	CHK	TOLERANCES UNLESS SPECIFIED		FINISH	DRAWN	DATE	SCALE	PAGE	OF	REV.
				DEC.	INCHES							
				.X	±.1		BLR	06/11/1999				
							ML	06/18/1999				
							GK	06/18/1999				
3	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS	.XX	±.02	TITLE CONNECTION DIAGRAM			1=1			
2	RE-ISSUE, ADDED '-' TO PART NUMBER	BLR 08/09/1999	GK	.XXX	±.005	3∅ - DUAL VOLTAGE MOTOR						
1	NEW DRAWING	BLR 06/18/1999	GK	.XXXX	±.0005	MAT'L.						
				ANG	±7'30"							
			RFP			CAD FILE EE7308LN	SIZE	DRAWING NO.				
			DIST	WP			A	EE7308-LN				3





Motor Load Data									
Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	0.96	1.00	1.10	1.30	1.60	1.65	1.70	11.4	
Torque (ft-lb)	0.00	0.28	0.55	0.84	1.15	1.30	1.40	3.8	
RPM	3600	3580	3565	3525	3450	3440	3425	0	
Efficiency (%)		52.5	65.5	72.5	74.0	75.5	75.5		
P.F. (%)	16.0	33.5	49.5	61.0	69.0	75.0	75.0		

Motor Speed Data						Information Block																						
	LR	Pull-Up	BD	Rated	Idle	HP	Sync. RPM	Frame	Enclosure	Construction	Voltage	Frequency	Design	LR Code letter	Service Factor	Temp Rise @ FL	Duty	Ambient	Elevation	Rotor/Shaft wk ²	Ret Wdg	Sound Pressure @ 1M	VFD Rating	Outline Dwg	Conn. Diag	Additional Specifications:		
Speed (RPM)	0	1800	3300	3450	3600	0.8	3600	56	DP	TDR	230/460#190-208/380-415 V	60	B	N	1.15	38	CONT	40 °C	1,000	0.02	NONE	ZT205	68	VERIFY	A-100110LN-656	A-EE7308-LN		
Current (Amps)	11.4	10.0	7.4	1.60	0.96																							
Torque (ft-lb)	3.8	3.8	5.4	1.15	0.00																							

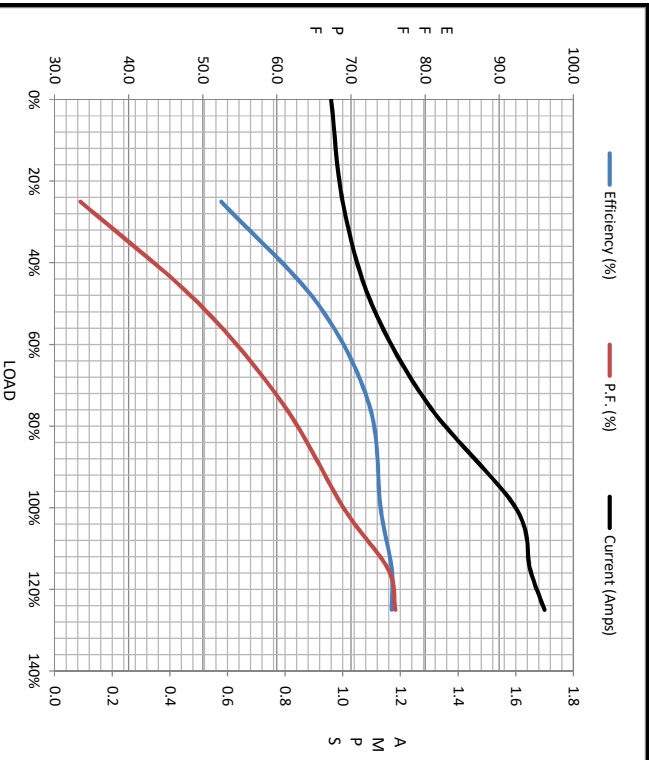

	R1	R2	X1	X2	Xm
EQUIV CKT (OHMS / PHASE)	0.0000	0.0000	0.0000	0.0000	0.0000

