

# PRODUCT INFORMATION PACKET



Model No: SRN2H0.33T61  
Catalog No: LM25124  
1/3,3600,TENV,56,3/60/230/460  
Automotive Duty



Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.  
©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E





### Nameplate Specifications


Output HP	<b>0.33 Hp</b>	Output KW	<b>0.25 kW</b>
Frequency	<b>60 Hz</b>	Voltage	<b>230/460 V</b>
Current	<b>2.0/1.0 A</b>	Speed	<b>3450 rpm</b>
Service Factor	<b>1</b>	Phase	<b>3</b>
Efficiency	<b>64 %</b>	Duty	<b>Continuous</b>
Insulation Class	<b>F</b>	Design Code	<b>B</b>
KVA Code	<b>T</b>	Frame	<b>56</b>
Enclosure	<b>Totally Enclosed Non Ventilated</b>	Overload Protector	<b>No</b>
Ambient Temperature	<b>65 °C</b>	Drive End Bearing Size	<b>6203</b>
Opp Drive End Bearing Size	<b>6203</b>	UL	<b>Recognized</b>
CSA	<b>Y</b>	CE	<b>N</b>
IP Code	<b>43</b>		

### Technical Specifications

Electrical Type	<b>Squirrel Cage Induction Run</b>	Starting Method	<b>Across The Line</b>
Poles	<b>2</b>	Rotation	<b>Reversible</b>
Mounting	<b>Rigid base</b>	Motor Orientation	<b>HORIZONTAL</b>
Drive End Bearing	<b>BALL</b>	Opp Drive End Bearing	<b>BALL</b>
Frame Material	<b>Rolled Steel</b>	Shaft Type	<b>NEMA 56</b>
Overall Length	<b>9.94 in</b>	Frame Length	<b>6.06 in</b>
Shaft Diameter	<b>0.625 in</b>	Shaft Extension	<b>1.88 in</b>
Assembly/Box Mounting	<b>F1 ONLY</b>		
Outline Drawing	<b>A-100108LN-606</b>	Connection Diagram	<b>A-EE7308-LN</b>

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 10/15/2018

A-100108LN

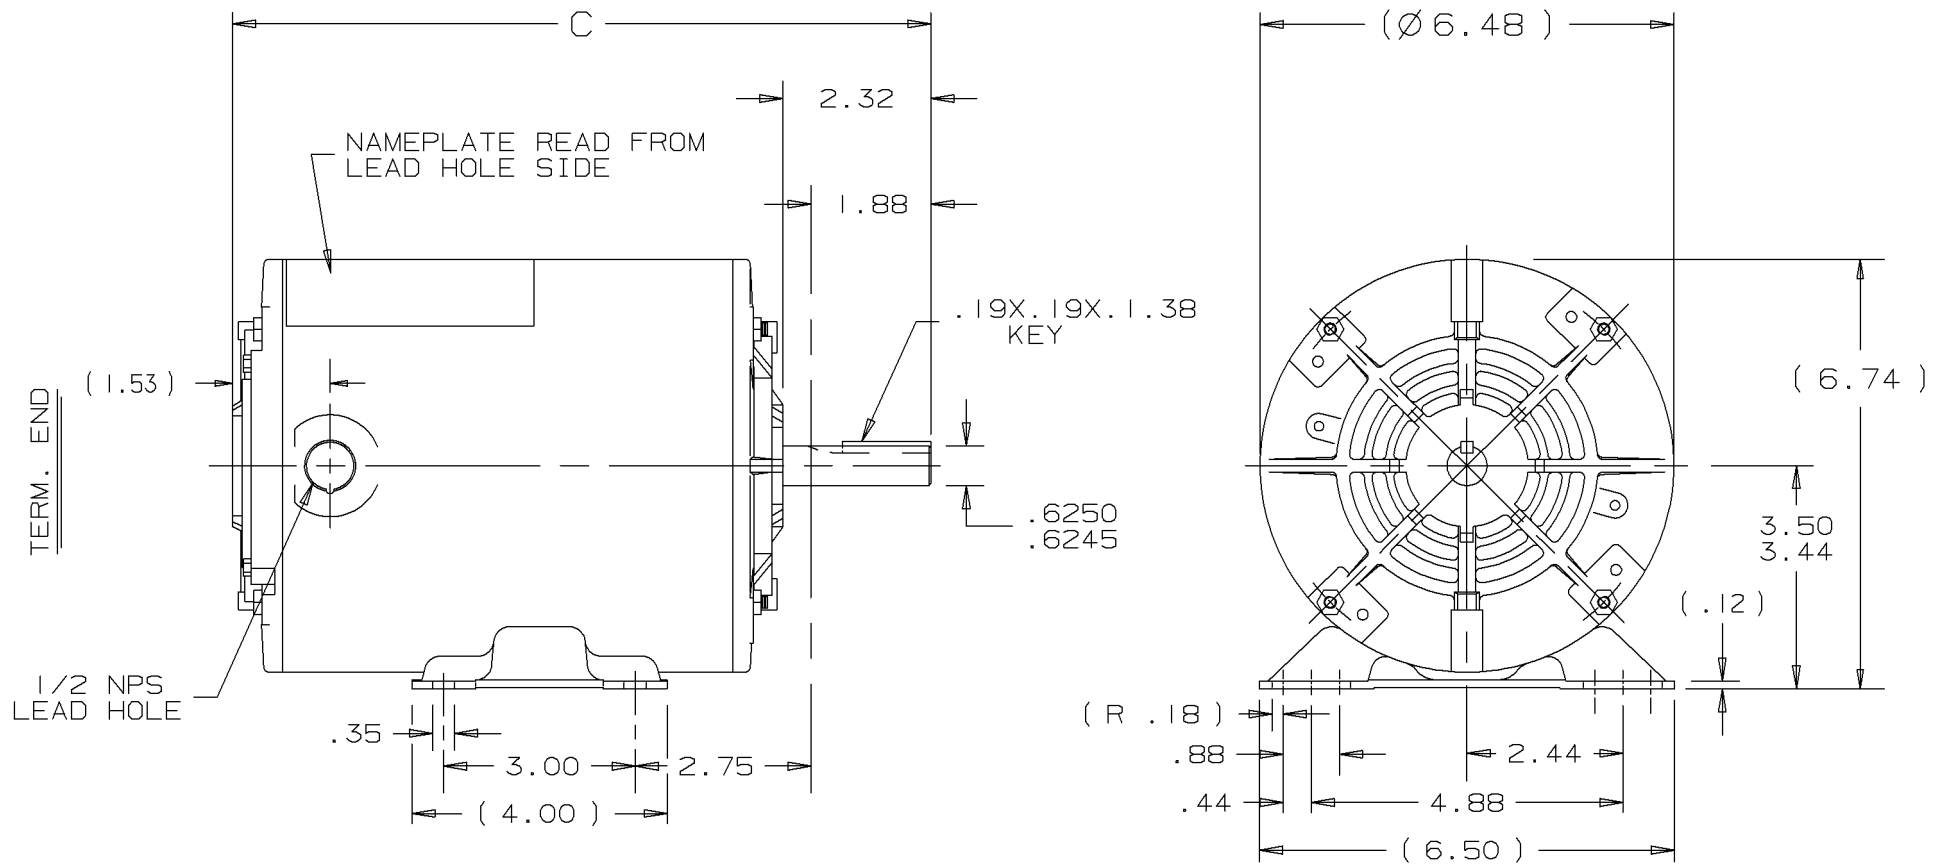

DASH	FR.	C			DASH	FR.	C		
					756	56-75	11.44		
606	56-60	9.94			806	"-80	11.94		
656	"-65	10.44			856	"-85	12.44		
706	"-70	10.94							

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON XX±.02 XXX±.005 XXXX±.0005 ANGLES± 7°30"			
					MAX. SURFACE ROUGHNESS UNLESS OTHERWISE NOTED			DRAWN BY TRB 09-07-1999
				FINISH			CHKD BY ML 09-07-1999	
				MATERIAL			APPD BY ET 09-08-1999	
REV	DATE	CHANGE		NAME	PART NAME OUTLINE			DRWG NO
					56 FR - TENV - BB - 3Ø			A-100108LN
				PURCHASED	CADD FILE NO.		100108LN	

THREE PHASE  
DUAL VOLTAGE MOTOR

HIGH VOLTAGE



LOW VOLTAGE



VIEW OF TERMINAL END

REF.  
WINDING DIAGRAM

T8Y, T2Y, T2BL, T4BX, T2EC, T2G  
 T6BZ, T2B, T6BL, T4AV, T6B, T4B

OPTIONAL CORD  
CONNECTION

L1 ———— WHITE  
 L2 ———— RED  
 L3 ———— BLACK

NO.	REVISION	BY & DATE	CHK	TOLERANCES UNLESS SPECIFIED		FINISH	DRAWN	DATE			
				DEC.	INCHES						
				.X	±.1		BLR	06/11/1999			
							CHK	ML 06/18/1999			
							APPD	GK 06/18/1999			
3	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS	.XX	±.02	TITLE CONNECTION DIAGRAM		SCALE 1=1			
2	RE-ISSUE, ADDED '-' TO PART NUMBER	BLR 08/09/1999	GK	.XXX	±.005	3∅ - DUAL VOLTAGE MOTOR		REF			
1	NEW DRAWING	BLR 06/18/1999	GK	.XXXX	±.0005	MAT'L.		FMF			
				ANG	±7'30"			PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE EE7308LN		SIZE	DRAWING NO.	PAGE	OF	REV.
				DIST	WP	A	EE7308-LN				3





P.O. BOX 8003  
WAUSAU, WI 54401-8003  
PH. 715-675-3311

**CERTIFICATION DATA SHEET**

DATA VOLTS: 460

CONN. DIAGRAM: A-EET7308-LN  
OUTLINE: A-100108LN-606  
WINDING: Z1207

CAT #: LM25124

TR 3

**TYPICAL MOTOR PERFORMANCE DATA**

HP	KW	SYNC RPM	FL RPM	FRAME	ENCLOSURE	TYPE	KVA CODE	DESIGN				
0.33	0.25	3600	3450	56	TENV	TTR	T	B				
PH	HZ	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB	ELEV.			
3	60	230/460	2/1	ACROSS THE LINE	CONT	F	1.15	65	3300			
F.L. EFF	64.0	3/4 LD EFF	60.0	1/2 LD EFF	51.0	GTD EFF	59.5	ELECT. TYPE				
F.L. PF	52.9	3/4 LD PF	44.5	1/2 LD PF	36.5	36.5	59.5	SQ CAGE IND RUN				
F.L. TORQUE	LR AMPS @ 460 V	L.R. TORQUE	2.20	LB-FT	431%	3.6	LB-FT	706%	F.L. RISE (°C)			
0.51	LB-FT	8.0							75			
PRESSURE @ 3	POWER	ROTOR WK²	MAX. LOAD WK²	SAFE STALL TIME	STARTS/HOUR	MOTOR WGT						
65	DBA	74	DBA	0.02	LB-FT²	1.5	LB-FT²	10	SEC.	2	18	LB.

**\*\*\* SUPPLEMENTAL INFORMATION \*\*\***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	MOTOR ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIIP COVER	SCREENS	PAINT
STANDARD HUBLESS	STANDARD HUBLESS	RIGID	HORIZONTAL	NO	NONE	NO	NONE	GRAY (POWDER)
BEARINGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL		
DE ODE	POLYREX EM	STANDARD 56	NONE	NONE	1144 STRESSPROOF (C-223)	ROLLED STEEL		
BALL VERIFY	6203	6203						
THERMOSTATS	PROTECTORS	WDG RTD's	BRG RTD's	THERMISTORS	CONTROL	SPACE HEATERS		
NONE	NOT	NONE	NONE	NONE	FALSE	NA		
R1 (ohms/ph)	R2 (ohms/ph)	X1 (ohms/ph)	X2 (ohms/ph)	Xm (ohms/ph)	VIBRATION (in/sec)	FLOAT		
0	0	0	0	0	0.150	ODE		


* N O T E S *		INVERTER TORQUE: NONE	INV. HP SPEED RANGE: NONE
		ENCODER: NONE	
		BRAKE: NONE	NONE PPR
		FT-LB: NONE	NA
		VOLTAGE: NONE	NA
		UL: VINS, CONST UL REC	

DATE:	1/30/2018	HZ:	
-------	-----------	-----	--



Motor Load Data						
Load	0%	25%	50%	75%	100%	LR
Current (Amps)	0.85	0.00	0.88	0.91	1.00	8.0
Torque (ft-lb)	0.00	0.00	0.26	0.38	0.51	2.20
RPM	3600	3590	3580	3520	3450	0
Efficiency (%)	0.0	0.0	51.0	60.0	64.0	
P.F. (%)	18.0	0.0	36.5	44.5	52.9	0.0

Motor Speed Data						Information Block																															
LR	Pull-Up	BD	Rated	Idle		HP	Sync. RPM	Frame	Enclosure	Construction	Voltage	Frequency	Design	LR Code letter	Service Factor	Temp Rise @ FL	Duty	Ambient	Elevation	Rotor/Shaft wk <sup>2</sup>	Ref Wdg	Sound Pressure @ 1M	VFD Rating	Outline Dwg	Conn. Diag	Additional Specifications:	R1	R2	X1	X2	Xm						
0	1725	3080	3450	3600		0.3	3600	56	TENV	TTR	230/460	60	B	T	1.15	75	CONT	40 °C	1,000	0.02	ZT207 TR	65	dB(A)	NONE	A-100108LN-606	A-EE7308-LN											
Current (Amps)	8.0	7.2	5.2	1.00	0.85																																
Torque (ft-lb)	2.20	1.87	3.6	0.51	0.00																																

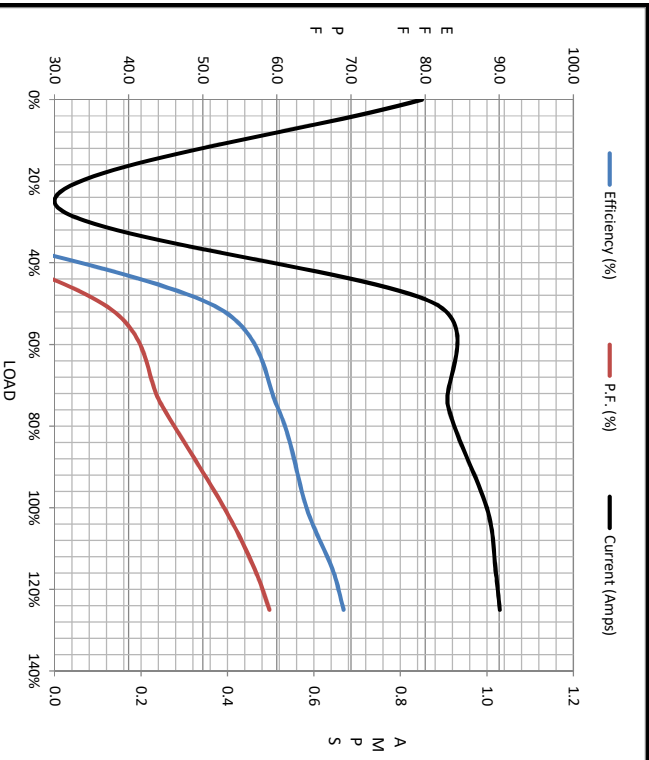

EQUIV CKT (OHMS / PHASE)			
R1	R2	X1	Xm
0.0000	0.0000	0.0000	0.0000

