



PE213T-2-8C

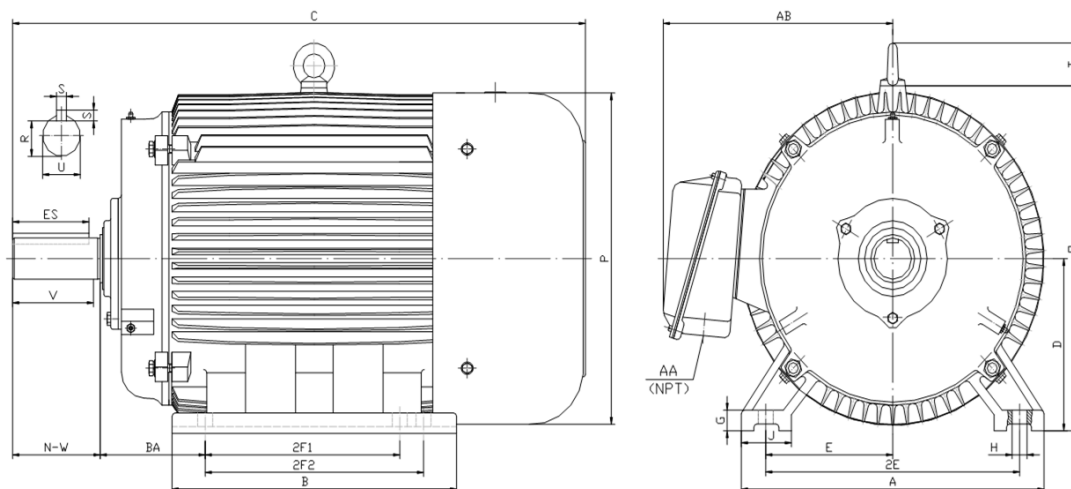
CRUSHER DUTY ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
2	900	213T	11.00	7.90	18.90	5.25	0.70	0.41	2.40	4.25	8.50	5.50	0.00	10.50	10.20	1.90	3.50

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
1.375	3.12	1.201	0.312	2.41	3.38	1.00	8.30	6308-ZZ	6308-ZZ	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





PE213T-2-8C

CRUSHER DUTY ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
2	865	213T	208-230/460	60	1.15	F	C	3.9	L	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6308-ZZ	6308-ZZ	9 Lead 2Y/Y	132
3.4	25	84.0	83.5	80.0	81.5	0.690	0.570	0.440	12.4	230	280				

NAME PLATE

 North American Electric, Inc. 											CONNECTION DIAGRAMS		
INVERTER DUTY 20:1 VT; 10:1 CT													
CAT NO: PE213T-2-8C				FRAME 213T				PHASE 3			208-230V 		
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55			
HP 2		RPM 865		HP 2		RPM 720		DUTY CONT		DES C			
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C		INS F			
FLA 7.5 - 6.8 / 3.4				FLA 8.0/4.0				DE BEARING 6308-ZZ					
CODE L		P.F. 0.69		CODE J		P.F. 0.71		ODE BEARING 6308-ZZ					
EFF 84.0		MIN 81.5		EFF 82		MIN 79.5		LUB: Mobil Polyrex EM					
MOTOR WEIGHT 132 LBS				CONNECTION 9 Lead 2Y/Y				SER NO				460V 	
General purpose use on industrial machinery installed in damp, dusty or dirty environments.													
 CC 082A													
Hernando, Mississippi													

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.