



NEMA Premium

NEMA

MOTOR MODEL:	GR3-AL-TF-145T-4-B-D-1.5
FACTORY TYPE:	TXA

Premium NEMA Cast Aluminum, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	1.5	1.5
Speed, RPM	1740	1430
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	4.36/2.18	5.06/2.53
Power Factor	0.74	-
Nominal Efficiency	86.5	84.7
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	H
FL Amps. @ 208 V	4.48	-
LRC @ 60Hz HV	17.4528	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	9	
Connection	YYY	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	84.56	0.53
75%	86.79	0.67
100%	87.1	0.75
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	21.8	21.8
3D Image Link		
GR3-AL-TF-145T-4-B-D-1.5		

GENERAL DATA				
Frame Size	145T			
Frame Enclosure	TEFC			
Mounting	Rigid			
Insulation Class	F			
Duty	Cont. / S1			
NEMA Design	B			
Frame Material	Cast Aluminum			
Ingress Protection	55			
Tropicalization	true			
Cable Entry	1-NPT 3/4"			
Feet Removable	true			
Double Drilled	-			
Paint Color	Graphite Gray			
Paint RAL	7024			
Weight lb	34.5			
MECHANICAL DATA				
DE Bearing	6205ZZ			
NDE Bearing	6205ZZ			
dB No-Load	-			
Rotor Wk ² , Lb-Ft ²	-			
Comp Ring (wavey washer)	NDE			
TORQUE VALUES			Torque lb-ft	% FLT
Locked Rotor Torque		16.1544	351.0	
Pull-Up Torque		14.8197	322.0	
Breakdown Torque		18.9158	411.0	
Full Load Torque		4.60239	100.0	
SITE CONDITIONS				
Ambient Temp °C		40		
Altitude Above Sea Level m		1000		

*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com




NEMA Premium

MOTOR MODEL:	GR3-AL-TF-145T-4-B-D-1.5
FACTORY TYPE:	TXA

NEMA

Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

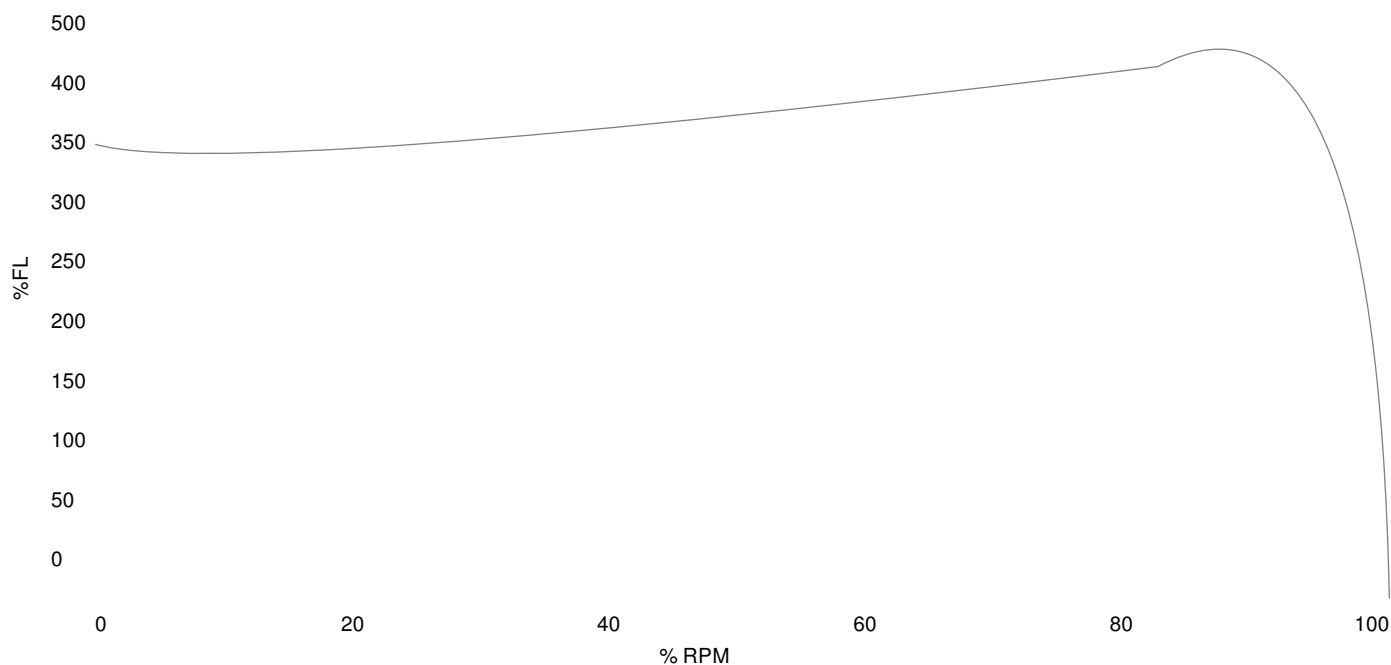

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	16.1544	351.0	Start Configuration
Pull-Up Torque	14.8197	322.0	Starting Current (A)
Breakdown Torque	18.9158	411.0	No-Load Current (A)
Full Load	4.60239	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	1.34	-	-	-	-
25	0.375	1.4	368.98	1787.5	76.22	0.33
50	0.75	1.57	665.18	1775.8	84.56	0.53
75	1.125	1.83	972.14	1763.0	86.79	0.67
100	1.5	2.16	1291.7	1749.1	87.1	0.75
125	1.875	2.54	1625.7	1734.1	86.5	0.8

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com