






## Pump Motors

# NEMA

<b>MOTOR MODEL:</b>	GR3-AL-TF-213JP-4-B-D-7.5
<b>FACTORY TYPE:</b>	TXA

### Premium NEMA Cast Aluminum, TEFC

Torque Speed (T-n) Curve

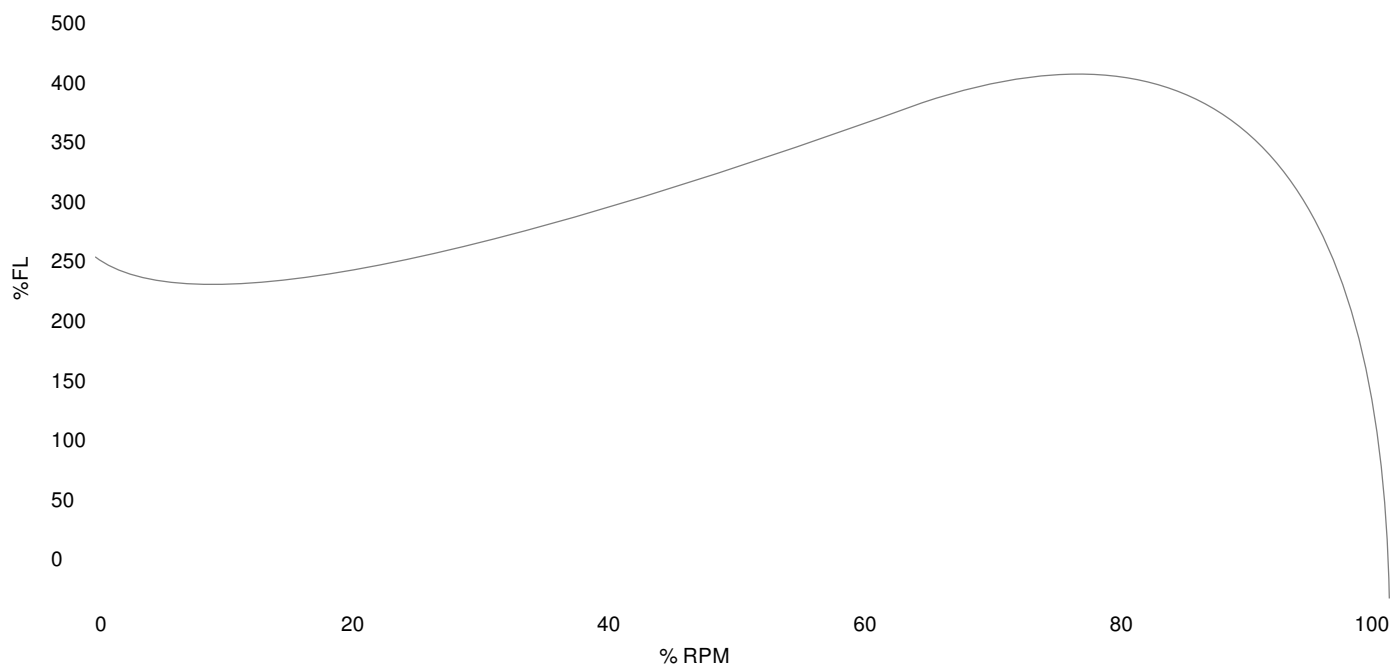

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	57.948	264.0	Start Configuration
Pull-Up Torque	41.266	188.0	Starting Current (A)
Breakdown Torque	84.0685	383.0	No-Load Current (A)
Full Load	21.95	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	-	-	-	-	-
25	1.875	-	-	-	-	-
50	3.75	-	-	-	-	-
75	5.625	-	-	-	-	-
100	7.5	-	-	-	-	-
125	9.375	-	-	-	-	-

Techtop Industries  
 2815 Colonnades Court  
 Peachtree Corners, GA 30071  
 Tel: 678-436-5540  
 E-Mail: info@techttopind.com