




NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-324T-6-BR-D-25
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

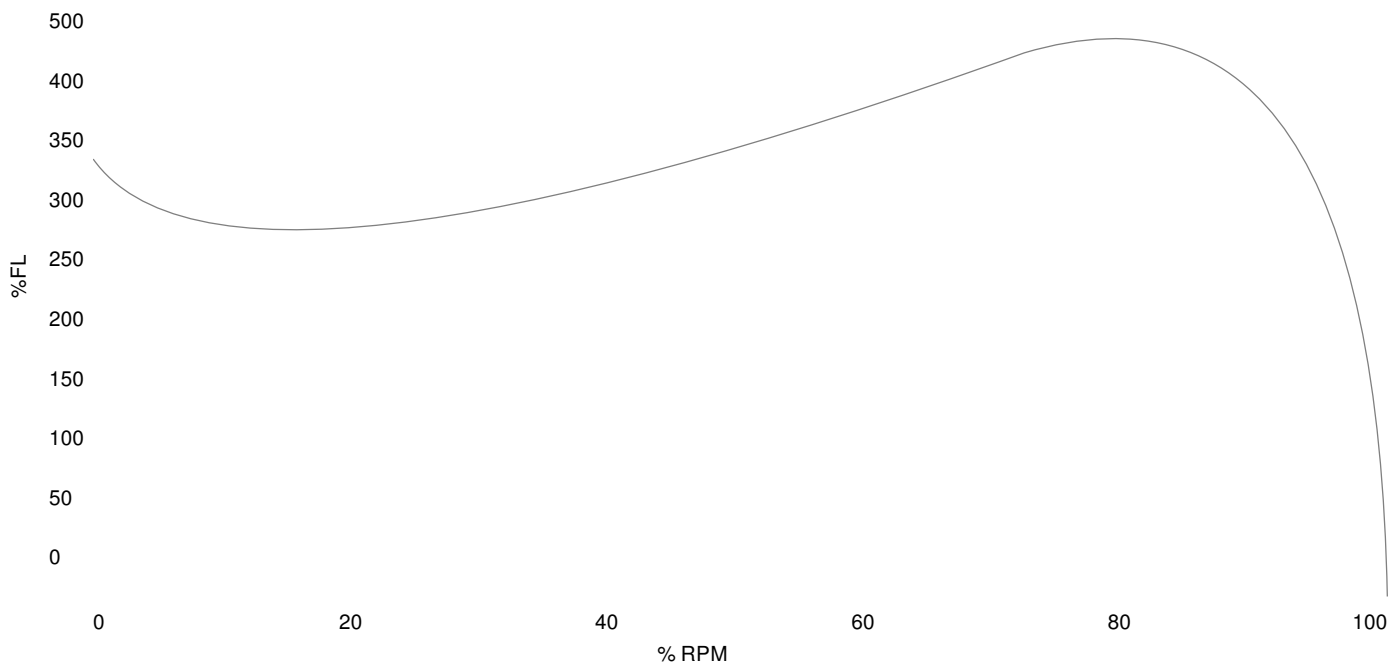

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	374.193	338.0	Start Configuration	-
Pull-Up Torque	218.095	197.0	Starting Current (A)	-
Breakdown Torque	464.974	420.0	No-Load Current (A)	-
Full Load	110.708	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	14.61	-	-	-	-
25	6.25	16.05	5.35	1196.5	86.95	0.42
50	12.5	19.84	10.14	1193.1	91.71	0.64
75	18.75	24.87	15.04	1189.5	92.78	0.76
100	25.0	30.81	20.04	1185.7	92.81	0.82
125	31.25	34.69	23.1	1183.3	92.58	0.84

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com