



NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-326T-4-BR-D-50
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	50.0	50.0
Speed, RPM	1770	1460
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	117.95/58.98	136/68
Power Factor	0.87	-
Nominal Efficiency	94.5	91.5
3/4 Load Efficiency	-	-
Service Factor	1.25	1.0
KVA Code	K	E
FL Amps. @ 208 V	130.429	-
LRC @ 60Hz HV	613.812	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	93.78	0.71
75%	94.29	0.81
100%	94.03	0.85
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	82.0	-
3D Image Link		
GR3-CI-TF-326T-4-BR-D-50		

GENERAL DATA			
Frame Size	326T		
Frame Enclosure	TEFC		
Mounting	Rigid		
Insulation Class	F		
Duty	Cont. / S1		
NEMA Design	A		
Frame Material	Cast Iron		
Ingress Protection	55		
Tropicalization	true		
Cable Entry	1-NPT 2"		
Feet Removable	true		
Double Drilled	true		
Paint Color	Graphite Gray		
Paint RAL	7024		
Weight lb	600.862		
MECHANICAL DATA			
DE Bearing	6312C3		
NDE Bearing	6312C3		
dB No-Load	-		
Rotor Wk ² , Lb-Ft ²	-		
Comp Ring (wavy washer)	DE		
TORQUE VALUES		Torque lb-ft	% FLT
Locked Rotor Torque		506.56	299.0
Pull-Up Torque		333.754	197.0
Breakdown Torque		520.113	307.0
Full Load Torque		169.418	100.0
SITE CONDITIONS			
Ambient Temp °C		40	
Altitude Above Sea Level m		1000	

*This report valid for above Date Code and newer models, please contact Techttop for more info.

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com




NEMA Premium

NEMA

MOTOR MODEL:	GR3-CI-TF-326T-4-BR-D-50
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

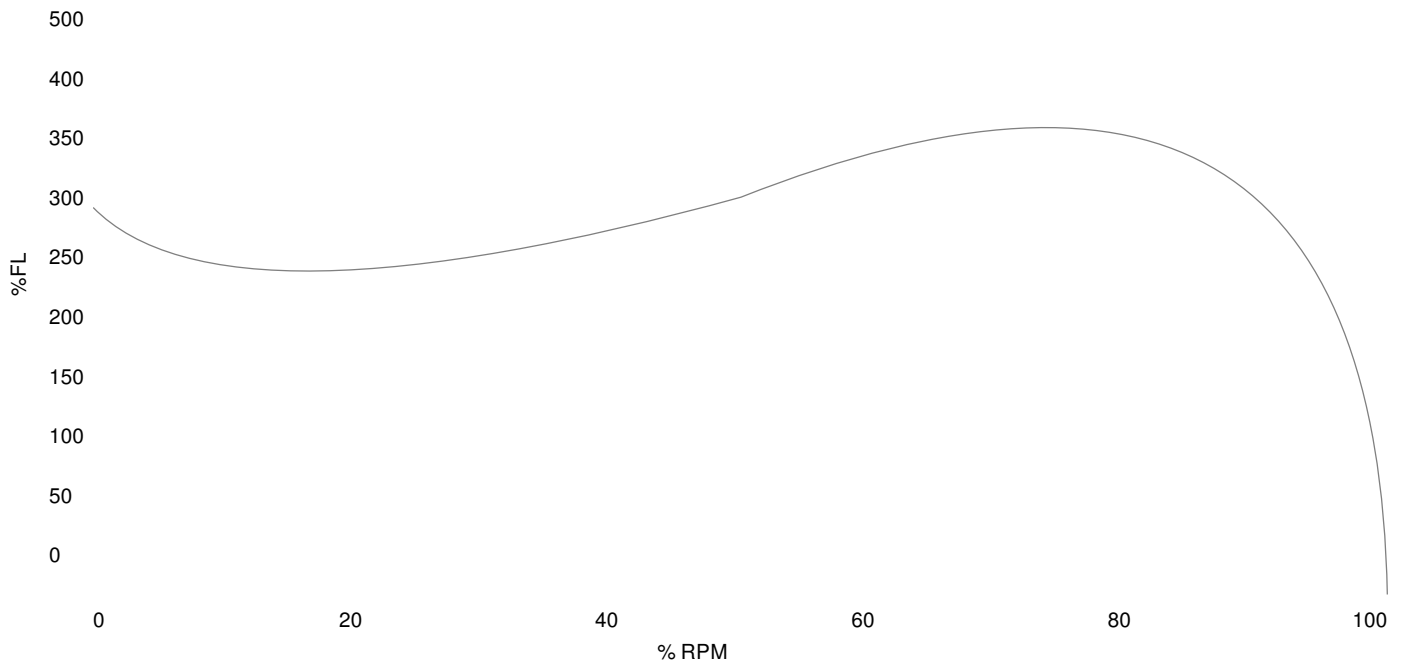

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values
Locked Rotor Torque	506.56	299.0	Start Configuration
Pull-Up Torque	333.754	197.0	Starting Current (A)
Breakdown Torque	520.113	307.0	No-Load Current (A)
Full Load	169.418	100.0	No-Load Power Factor

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	26.53	-	-	-	-
25	12.5	30.25	11.84	1795.2	90.58	0.49
50	25.0	40.19	22.87	1790.5	93.78	0.71
75	37.5	52.63	34.12	1785.5	94.29	0.81
100	50.0	67.01	45.63	1780.2	94.03	0.85
125	62.5	82.79	57.41	1774.4	93.41	0.87

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com