




NEMA Premium

MOTOR MODEL:	GR3-CI-TF-447TC-4-BR-E-200
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

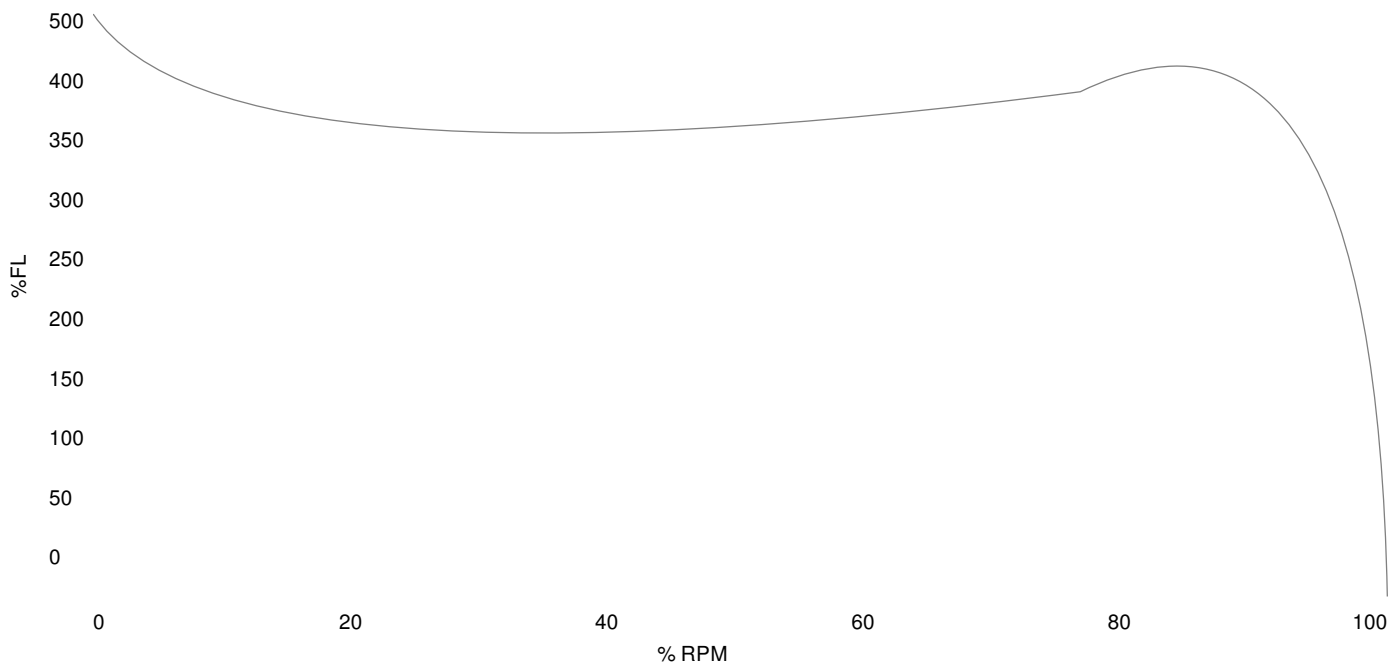

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	2627.68	450.0	Start Configuration	-
Pull-Up Torque	1775.14	304.0	Starting Current (A)	-
Breakdown Torque	2277.32	390.0	No-Load Current (A)	-
Full Load	583.928	100.0	No-Load Power Factor	-

% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	84.68	-	-	-	-
25	50.0	100.46	40.44	1797.7	92.73	0.51
50	100.0	134.85	78.67	1795.5	95.34	0.73
75	150.0	177.4	117.4	1793.2	95.83	0.83
100	200.0	225.59	156.67	1790.9	95.74	0.87
125	250.0	256.15	180.49	1789.4	95.57	0.88

Techtop Industries
 2815 Colonnades Court
 Peachtree Corners, GA 30071
 Tel: 678-436-5540
 E-Mail: info@techttopind.com