

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	: Dealers Industrial Equipment 800-469-3110				
Customer reference	: 14829912				
Product line	: W40 JP Pump High Efficiency Three-Phase		Product code :	14829912	
			Catalog # :	07536OP3HFP364JPV-W4	
Frame	: 364/5JP		Locked rotor time	: 46s (cold) 26s (hot)	
Output	: 75 HP (55 kW)		Temperature rise	: 80 K	
Poles	: 2		Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.	
Rated current	: 68.2 A		Protection degree	: IP23	
L. R. Amperes	: 396 A		Cooling method	: IC01 - ODP	
LRC	: 5.8x(Code F)		Mounting	: W-6	
No load current	: 20.2 A		Rotation <sup>1</sup>	: Both (CW and CCW)	
Rated speed	: 3555 rpm		Starting method	: Direct On Line	
Slip	: 1.25 %		Approx. weight <sup>3</sup>	: 703 lb	
Rated torque	: 109 ft.lb				
Locked rotor torque	: 160 %				
Breakdown torque	: 210 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 5.60 sq.ft.lb				
Design	: B				
Output	25%	50%	75%	100%	
Efficiency (%)	90.3	91.0	92.4	93.0	
Power Factor	0.55	0.80	0.85	0.87	
	Foundation loads				
	Max. traction : 445 lb				
	Max. compression : 1149 lb				
	<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	: 6314 C3		: 6212 Z C3		
Sealing	: Without Bearing Seal		: Without Bearing Seal		
Lubrication interval	: 7209 h		: 12143 h		
Lubricant amount	: 27 g		: 13 g		
Lubricant type	: Mobil Polyrex EM				
Notes downloaded from <a href="http://dealerselectric.com">http://dealerselectric.com</a>					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	16/04/2019			1 / 2	


# LOAD PERFORMANCE CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer : Dealers Industrial Equipment 800-469-3110  
 Customer reference : 14829912

Product line : W40 JP Pump High Efficiency Three-Phase      Product code : 14829912  
 Catalog # : 07536OP3HFP364JPV-W4

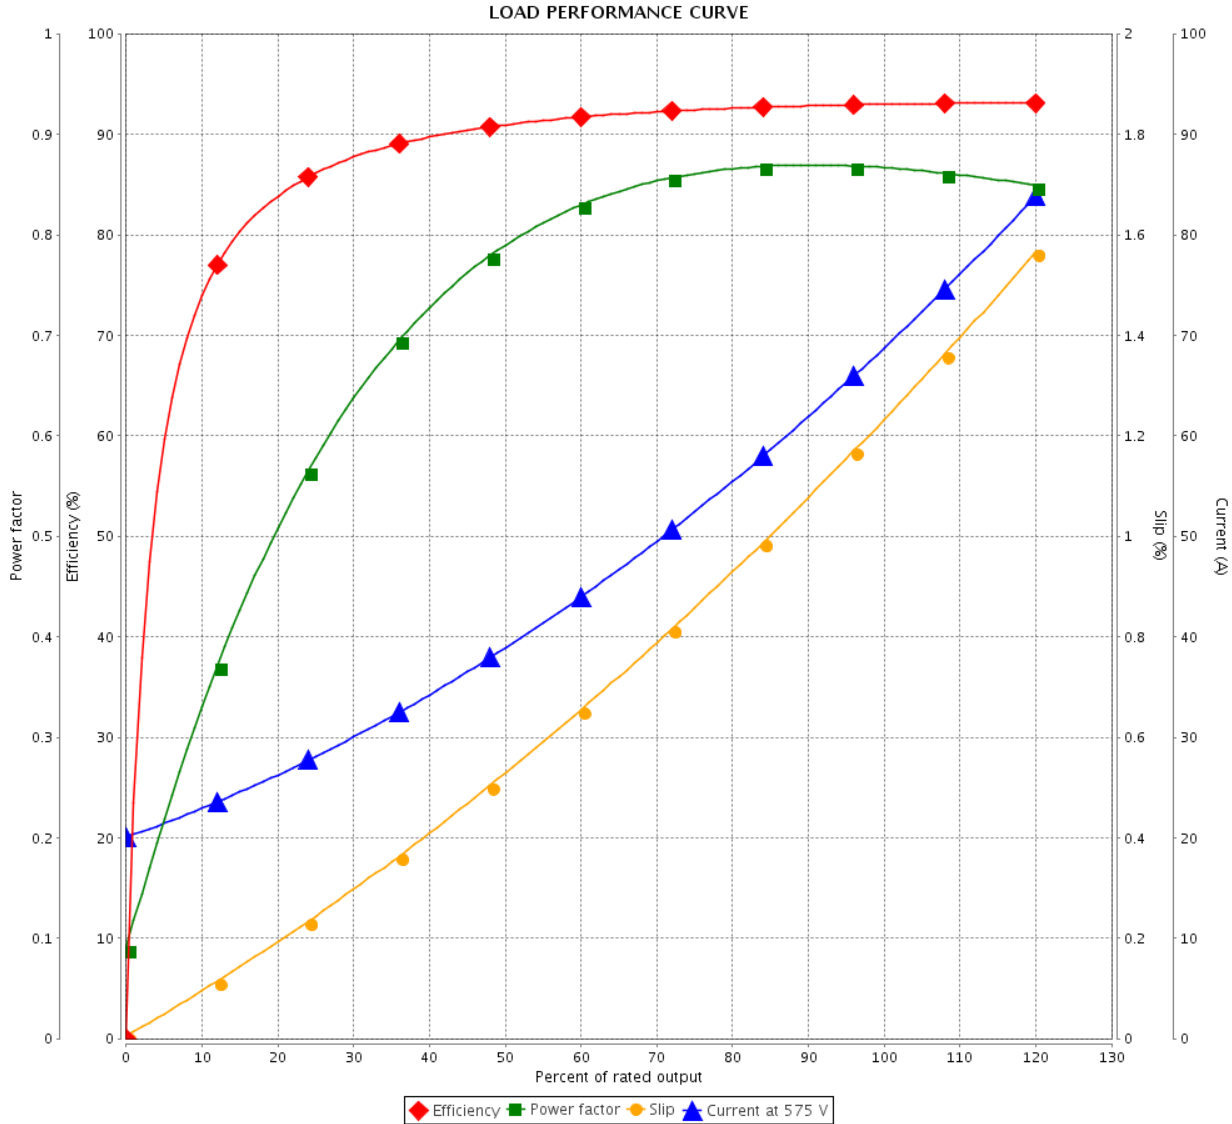



Performance : 575 V 60 Hz 2P

Rated current : 68.2 A	Moment of inertia (J) : 5.60 sq.ft.lb
LRC : 5.8	Duty cycle : Cont.(S1)
Rated torque : 109 ft.lb	Insulation class : F
Locked rotor torque : 160 %	Service factor : 1.15
Breakdown torque : 210 %	Temperature rise : 80 K
Rated speed : 3555 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/04/2019			

Dimensões em polegada  
Dimensions in inches

THIS IS AN UPDATED REVISION, THE  
PREVIOUS ONE MUST BE DISREGARDED.

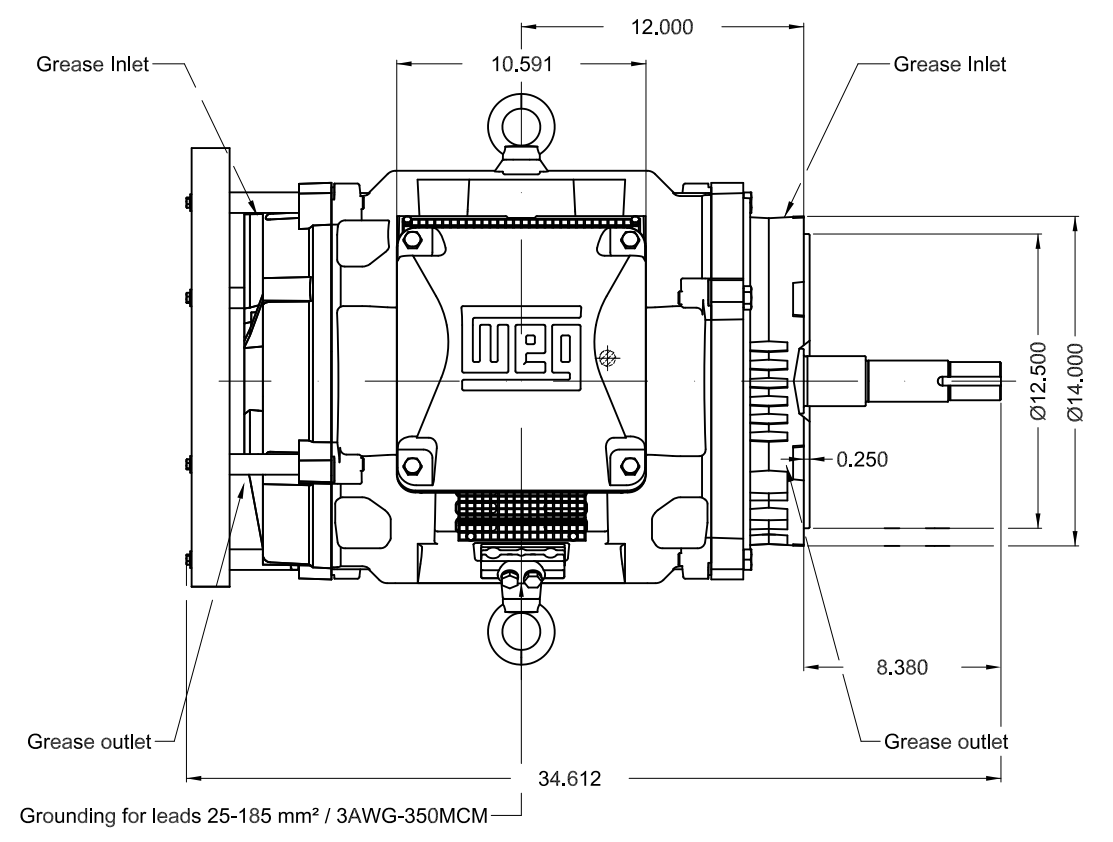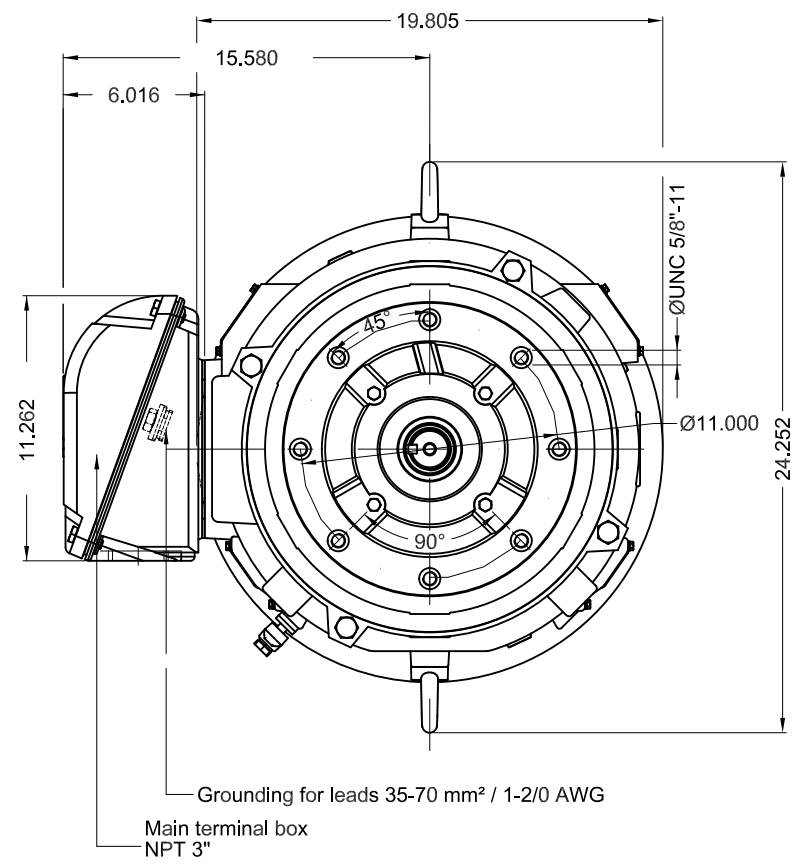

Color RAL 3002									
Painting plan 203A									
Mounting V18									
					SCALE	1:8			
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN	THREE PHASE W40 MOTOR HIGH EFF							
CHECKED		FRAME 364/5JP IP23 ODP							
RELEASED		CLOSE COUPLED PUMP JP TYPE   W							
REL DT	16.04.2019	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

75 HP 02 Poles 60Hz

A

