

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer : Dealers Industrial Equipment 800-469-3110  
Customer reference : 14832512

Product line : W40 JM Pump High Efficiency Three-Phase      Product code : 14832512  
Catalog # : 05018OP3EFP326JMV-W4

Frame	: 324/6JM	Locked rotor time	: 27s (cold) 15s (hot)
Output	: 50 HP (37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 133-120/60.2 A	Protection degree	: IP23
L. R. Amperes	: 799-722/361 A	Cooling method	: IC01 - ODP
LRC	: 6.0x(Code G)	Mounting	: W-6
No load current	: 46.2-53.6/26.8 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1775 rpm	Starting method	: Direct On Line
Slip	: 1.39 %	Approx. weight <sup>3</sup>	: 498 lb
Rated torque	: 146 ft.lb		
Locked rotor torque	: 240 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 5.98 sq.ft.lb		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	92.2	92.4	93.0	93.0	Max. traction
Power Factor	0.41	0.67	0.78	0.83	Max. compression

	Drive end	Non drive end
Bearing type	: 6312 Z C3	: 6211 Z C3
Sealing	: Without Bearing Seal	: Without Bearing Seal
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 21 g	: 11 g
Lubricant type	Mobil Polyrex EM	

Notes  
downloaded from <http://dealerselectric.com>

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	16/04/2019			
		Page		Revision
		1 / 2		

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer : Dealers Industrial Equipment 800-469-3110  
Customer reference : 14832512

Product line : W40 JM Pump High Efficiency  
Three-Phase

Product code : 14832512

Catalog # : 05018OP3EFP326JMV-W4

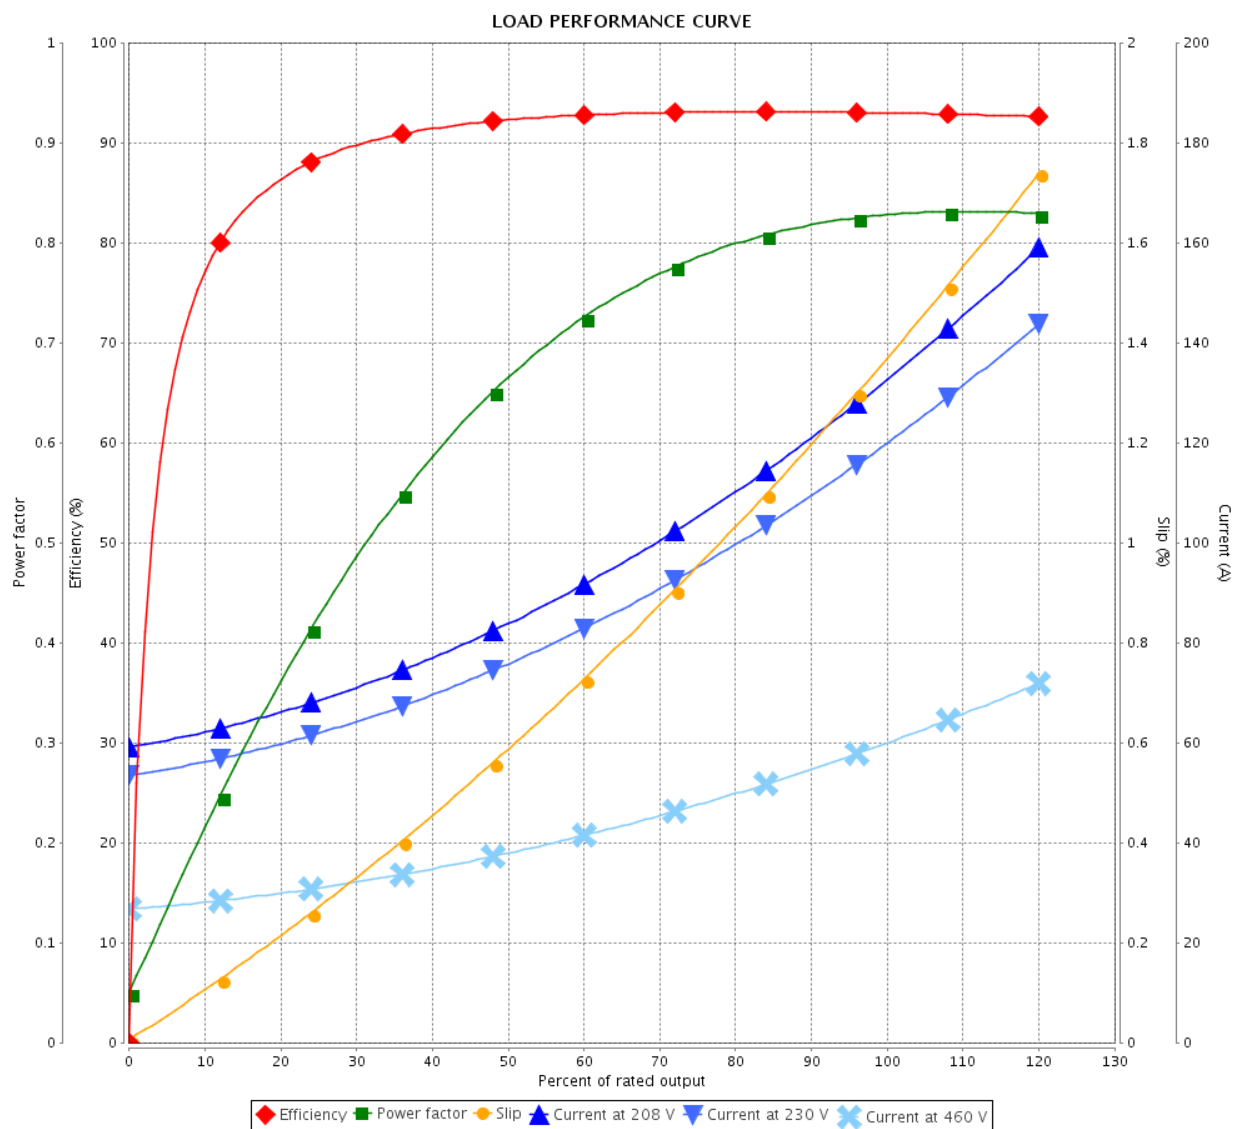


Performance : 208-230/460 V 60 Hz 4P

Rated current : 133-120/60.2 A  
LRC : 6.0  
Rated torque : 146 ft.lb  
Locked rotor torque : 240 %  
Breakdown torque : 229 %  
Rated speed : 1775 rpm

Moment of inertia (J) : 5.98 sq.ft.lb  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.15  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

THIS IS AN UPDATED REVISION, THE  
PREVIOUS ONE MUST BE DISREGARDED.

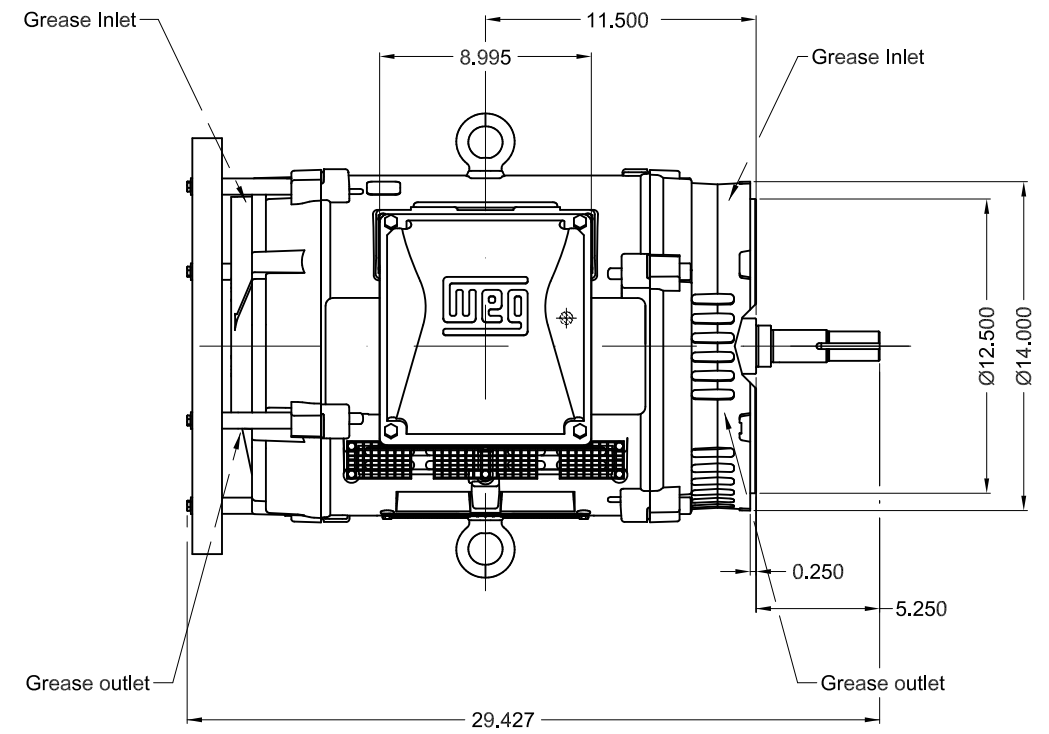

1:8



ZME A3