

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	: Dealers Industrial Equipment 800-469-3110				
Customer reference	: 14832529				
Product line	: W40 JM Pump High Efficiency Three-Phase		Product code :	14832529	
			Catalog # :	05018OP3HFP326JMV-W4	
Frame	: 324/6JM		Locked rotor time	: 27s (cold) 15s (hot)	
Output	: 50 HP (37 kW)		Temperature rise	: 80 K	
Poles	: 4		Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.	
Rated current	: 48.2 A		Protection degree	: IP23	
L. R. Amperes	: 289 A		Cooling method	: IC01 - ODP	
LRC	: 6.0x(Code G)		Mounting	: W-6	
No load current	: 21.4 A		Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1775 rpm		Starting method	: Direct On Line	
Slip	: 1.39 %		Approx. weight ³	: 498 lb	
Rated torque	: 146 ft.lb				
Locked rotor torque	: 240 %				
Breakdown torque	: 229 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 5.98 sq.ft.lb				
Design	: B				
Output	25%	50%	75%	100%	
Efficiency (%)	92.2	92.4	93.0	93.0	
Power Factor	0.41	0.67	0.78	0.83	
	Foundation loads				
	Max. traction				
	Max. compression				
	<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	: 6312 Z C3		6211 Z C3		
Sealing	: Without Bearing Seal		Without Bearing Seal		
Lubrication interval	: 20000 h		20000 h		
Lubricant amount	: 21 g		11 g		
Lubricant type	: Mobil Polyrex EM				
Notes downloaded from http://dealerselectric.com					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	16/04/2019			1 / 2	


LOAD PERFORMANCE CURVE



Three Phase Induction Motor - Squirrel Cage

Customer : Dealers Industrial Equipment 800-469-3110
 Customer reference : 14832529

Product line : W40 JM Pump High Efficiency Three-Phase Product code : 14832529
 Catalog # : 05018OP3HFP326JMV-W4

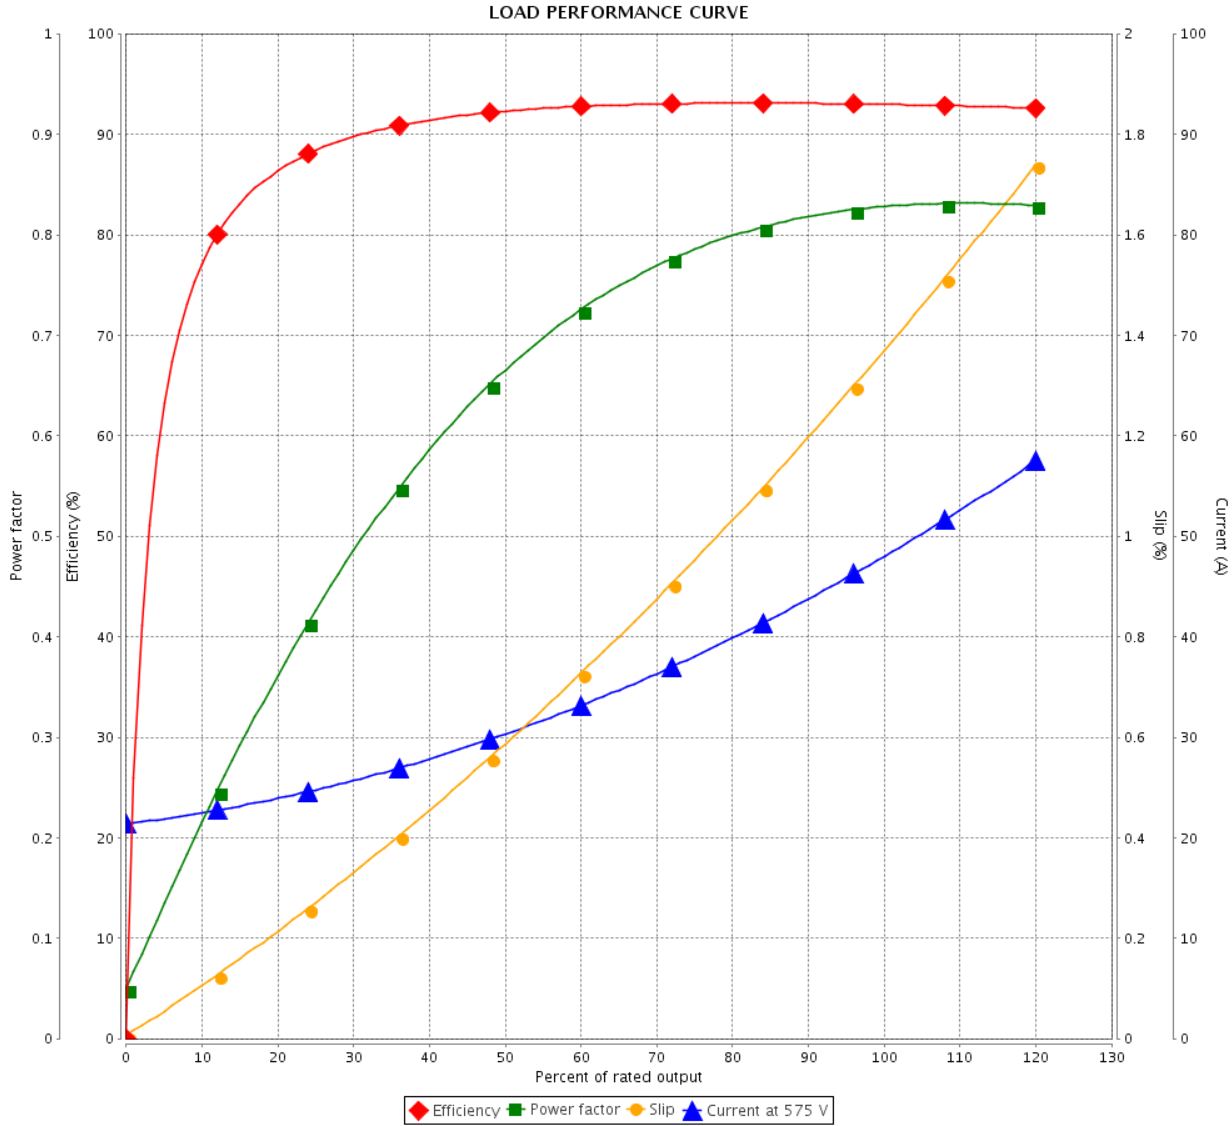


Performance : 575 V 60 Hz 4P

Rated current : 48.2 A	Moment of inertia (J) : 5.98 sq.ft.lb
LRC : 6.0	Duty cycle : Cont.(S1)
Rated torque : 146 ft.lb	Insulation class : F
Locked rotor torque : 240 %	Service factor : 1.15
Breakdown torque : 229 %	Temperature rise : 80 K
Rated speed : 1775 rpm	Design : B


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	16/04/2019			

Dimensões em polegada
Dimensions in inches

THIS IS AN UPDATED REVISION, THE
PREVIOUS ONE MUST BE DISREGARDED.

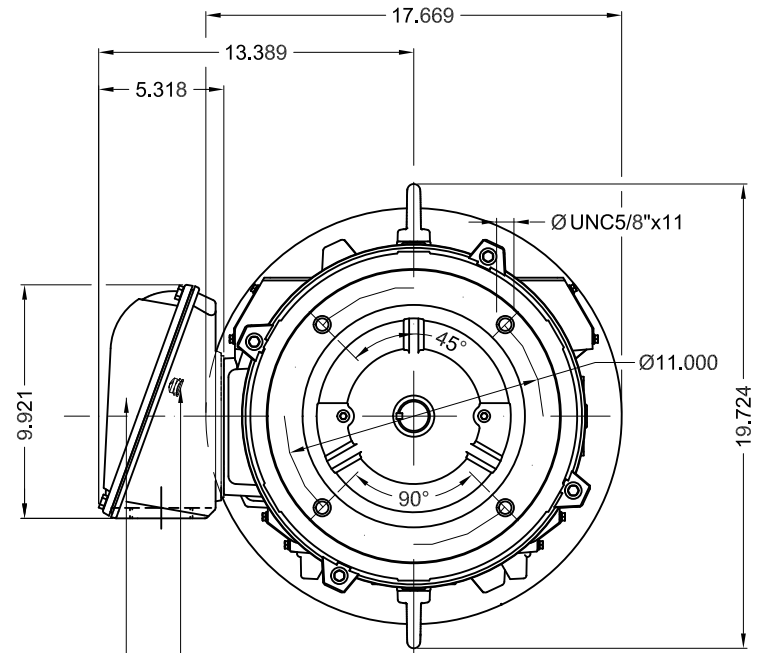

Grounding for leads 5.2-35 mm² / 10-2 AWG
Main terminal box
NPT 2"

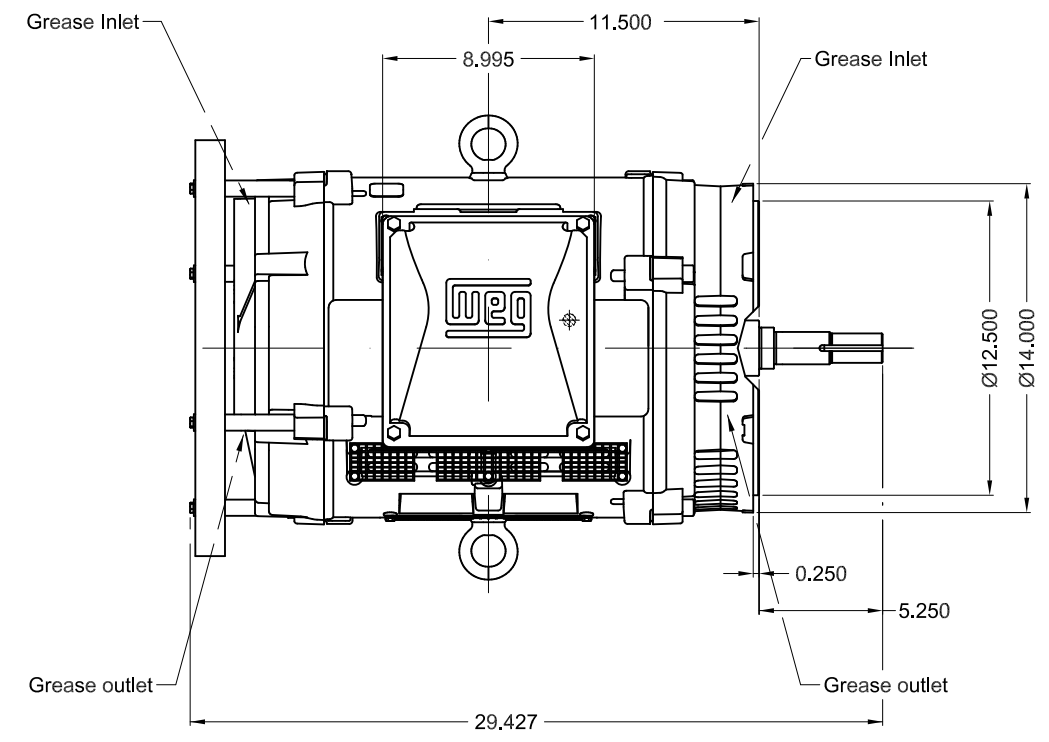

Color RAL 3002		Painting plan 203A		Mounting V18		SCALE		1:8		
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN	THREE PHASE W40 MOTOR HIGH EFF								
CHECKED		FRAME 324/6JM IP23 ODP								
RELEASED		CLOSE COUPLED PUMP JM TYPE W								
REL DT	16.04.2019	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1				

50 HP 04 Poles 60Hz

A

