

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	: Dealers Industrial Equipment 800-469-3110				
Customer reference	: 14836781				
Product line	: W40 JP Pump NEMA Premium Efficiency Three-Phase		Product code :	14836781	
			Catalog # :	04036OT3E286JPV-W40	
Frame	: 284/6JP		Locked rotor time	: 14s (cold) 8s (hot)	
Output	: 40 HP (30 kW)		Temperature rise	: 80 K	
Poles	: 2		Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	: 208-230/460 V		Altitude	: 1000 m.a.s.l.	
Rated current	: 104-93.6/46.8 A		Protection degree	: IP23	
L. R. Amperes	: 673-608/304 A		Cooling method	: IC01 - ODP	
LRC	: 6.5x(Code G)		Mounting	: W-6	
No load current	: 25.7-29.8/14.9 A		Rotation ¹	: Both (CW and CCW)	
Rated speed	: 3540 rpm		Noise level ²	: 73.0 dB(A)	
Slip	: 1.67 %		Starting method	: Direct On Line	
Rated torque	: 58.5 ft.lb		Approx. weight ³	: 370 lb	
Locked rotor torque	: 190 %				
Breakdown torque	: 260 %				
Insulation class	: F				
Service factor	: 1.25				
Moment of inertia (J)	: 2.02 sq.ft.lb				
Design	: B				
Output	25%	50%	75%	100%	
Efficiency (%)	91.5	91.7	92.4	92.4	
Power Factor	0.51	0.76	0.84	0.87	
	Foundation loads				
	Max. traction				
	Max. compression				
	<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	: 6311 Z C3		6211 Z C3		
Sealing	: Without Bearing Seal		Without Bearing Seal		
Lubrication interval	: 11517 h		14226 h		
Lubricant amount	: 18 g		11 g		
Lubricant type	: Mobil Polyrex EM				
Notes downloaded from http://dealerselectric.com					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	16/04/2019			1 / 2	


LOAD PERFORMANCE CURVE



Three Phase Induction Motor - Squirrel Cage

Customer : Dealers Industrial Equipment 800-469-3110
 Customer reference : 14836781

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase Product code : 14836781
 Catalog # : 04036OT3E286JPV-W40

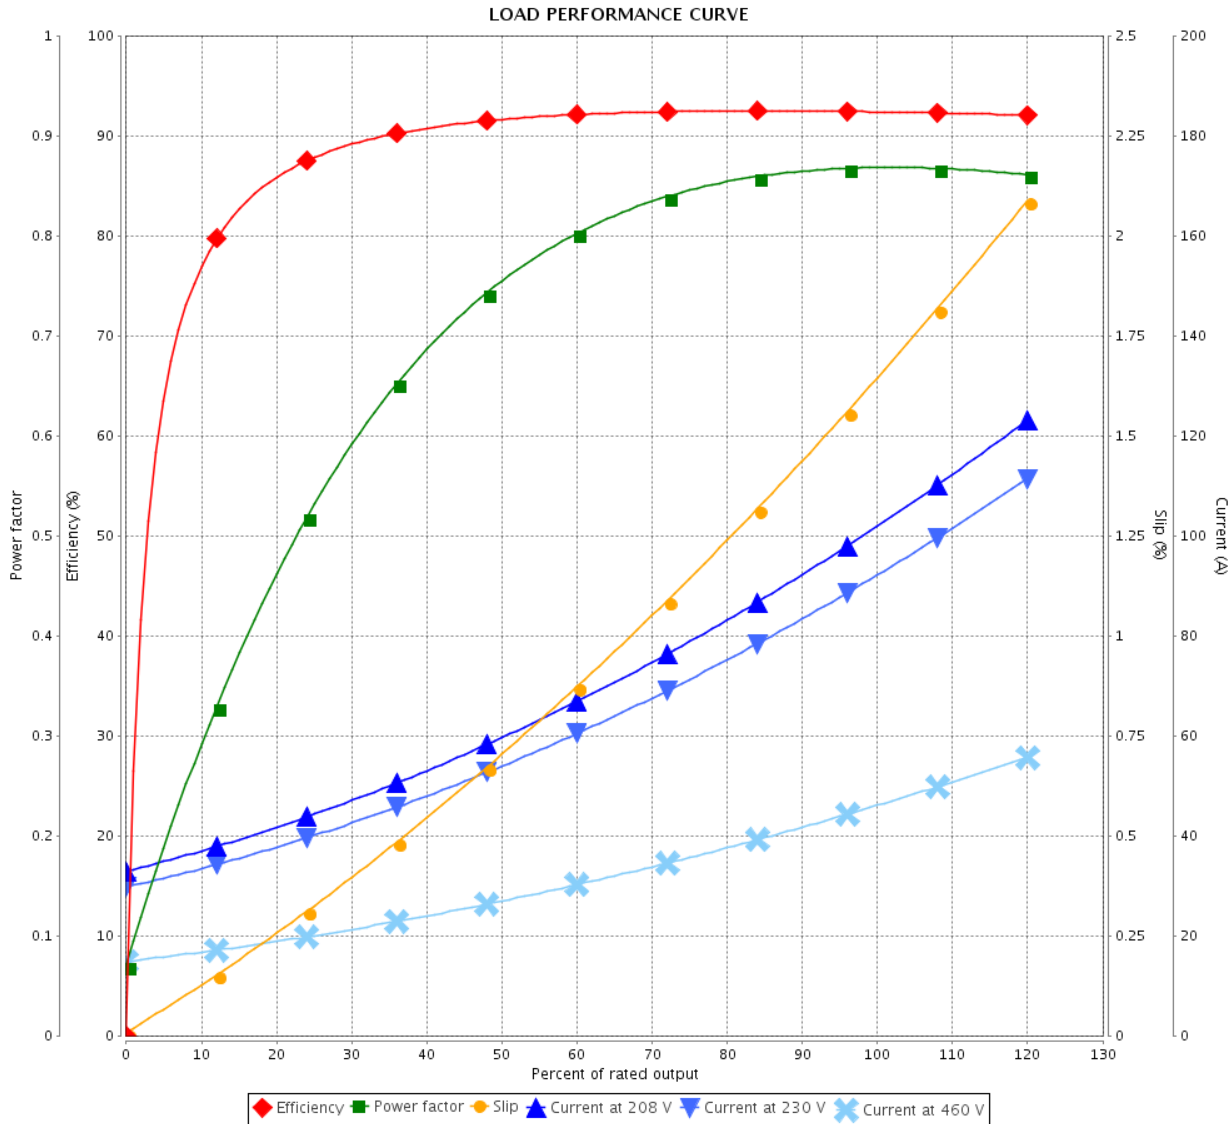



Performance : 208-230/460 V 60 Hz 2P

Rated current : 104-93.6/46.8 A	Moment of inertia (J) : 2.02 sq.ft.lb
LRC : 6.5	Duty cycle : Cont.(S1)
Rated torque : 58.5 ft.lb	Insulation class : F
Locked rotor torque : 190 %	Service factor : 1.25
Breakdown torque : 260 %	Temperature rise : 80 K
Rated speed : 3540 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

Dimensões em polegada
Dimensions in inches

THIS IS AN UPDATED REVISION, THE
PREVIOUS ONE MUST BE DISREGARDED.

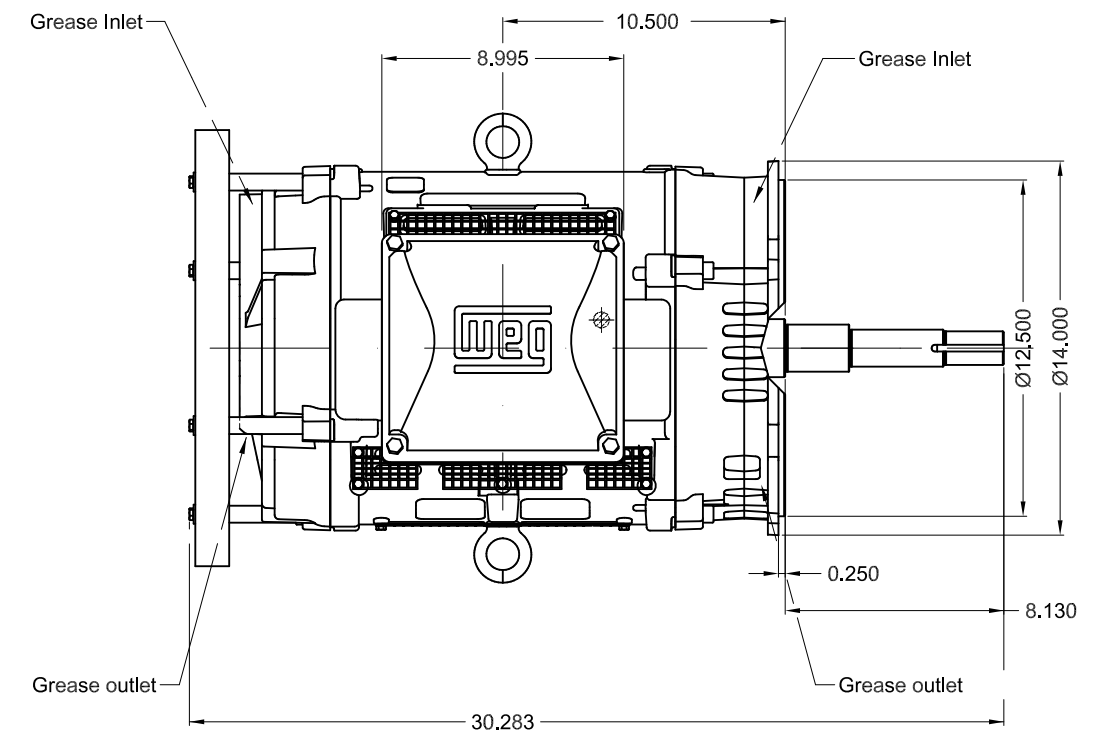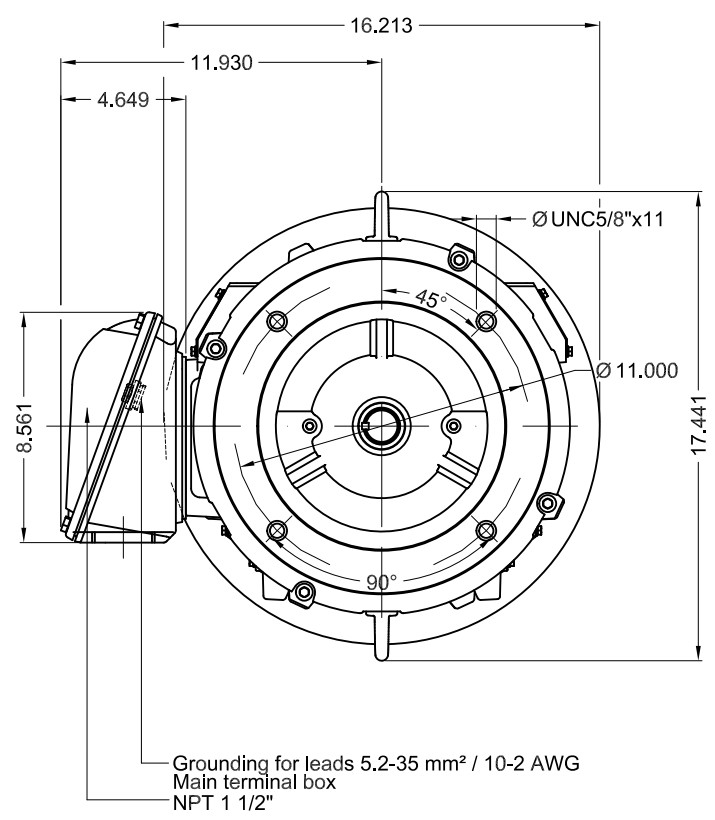

Color RAL 5009		Painting plan 203A		Mounting V18		SCALE	1:7	
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	USERADMIN	THREE PHASE W40 MOTOR NEMA PREMIUM EFF						
CHECKED		FRAME 284/6JP IP23 ODP						
RELEASED		CLOSE COUPLED PUMP JP TYPE W						
REL DT	16.04.2019	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1		

40 HP 02 Poles 60Hz

A

