

SS207877

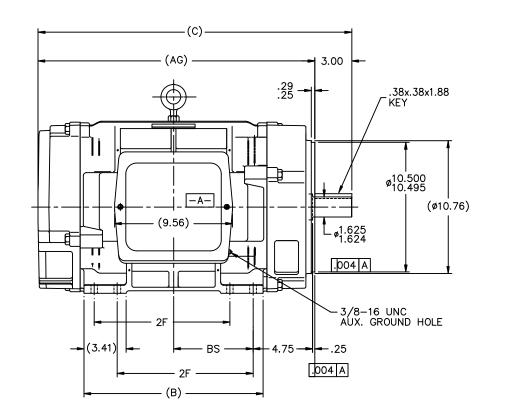

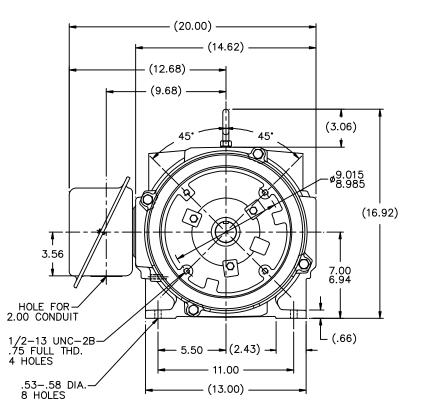

NOTES:

DASH FRAME

284TSC

286TSC

1325

1512

- 1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS. 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY
- REMOVING BRACKETS AND TURNING FRA

С

23.57

25.44

2F

9.50

11.00

| - 3. | NAMEPLATE | ε το βε | READ | FROM | CONDUIT | BOX |
|------|-----------|---------|------|------|---------|-----|
| | SIDE OF M | OTOR | | | | |

В

12.63

14.50

| | FRAME | 180* | | | | | | | | | | | | | |
|-----------|-------|------|---------------------------|------------|--|----------------|-----------|--------------|------------|------------------------------|------------------------|----------------------------|----------|----------------|-------|
| NDUIT BOX | | | | 匚' | | | | | | UNLES | ERANCES S SPECIFIED | | | AWN RWR 03/03, | /2004 |
| | | | | | í l | | | | | DEC. | INCHES | | | CHK APPD | |
| | | | | | 1 | | | | .x. | .x | ±.1 | LILECTRICE | | | |
| | | | | \Box' | | | i | | \Box | .xx | ±.02 | ITLE OUTLINE | SC | ALE 1=5 | |
| | | 2 | 2.00 CONDUIT WAS 1.50 ECH | N #25435 | , | WGJ 08-16-2012 | EMH | .xxx | ±.005 | 280TSC FRTS -DR.PR CAST IRON | | F | | | |
| L | BS | MTG | AG | <u>[1]</u> | REPLACED D.E. BRKT W/#10.50 FACE BRKT MU49925 M | | | MSG 1/5/2010 | MJS | .xxxx | ±.0005 | MAT'L. | FM | FMF | |
| t | 5.50 | | 20.57 | NO. | REVISION | | BY & DATE | СНК | ANG | ±7'30" | FINISH | | PREV | | |
| L | 0.00 | | 20.07 | - | THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT | | | | RFP | | | CAD FILE ss207877 SIZE DRA | WING NO. | PAGE 1 OF 1 | REV. |
| | 6.44 | | 22.44 | i i | | | | | DIST WA-LB | | | B | SS20 | 7877 | 2 |