


**TOSHIBA/HOUSTON** EXPLOSION PROOF MOTORS  
HORIZONTAL FOOT-MOUNTED

Fr. 182T-184T

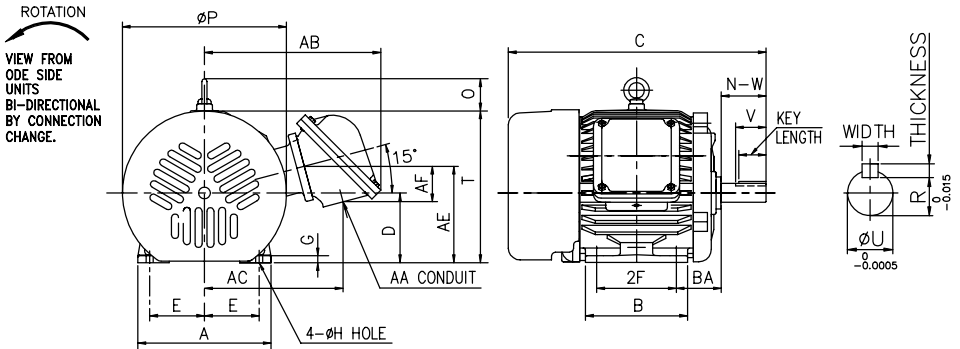

UNITS: INCHS

FRAME SIZE	MOUNTING				CONDUIT BOX				
	E	2F	H	BA	AA	AB	AC	AF	AE
182T	3.75	4.50	0.43	2.75	NPT1"	9.57	7.45	1.73	5.99
184T	3.75	5.50	0.43	2.75	NPT1"	9.57	7.45	1.73	5.99

FRAME SIZE	HP	POLE	WEIGHT
182T	3HP	2	135 lbs
184T	5HP	2	151 lbs
182T	3HP	4	140 lbs
184T	5HP	4	162 lbs
182T	1.5HP	6	142 lbs
184T	2HP	6	164 lbs

FRAME SIZE	MOTOR DIMENSIONS						
	A	B	C	D	G	P	O+T
182T	9.05	5.75	15.11	4.50	0.66	9.84	11.45
184T	9.05	6.69	16.09	4.50	0.66	9.84	11.45

FRAME SIZE	SHAFT EXTENSION			KEY			BEARINGS	
	N-W	U	V	WIDTH	THICKNESS	LENGTH	LS	OS
182T	2.75	1.125	2.70	0.250	0.250	1.750	6207ZZ	6206ZZ
184T	2.75	1.125	2.70	0.250	0.250	1.750	6207ZZ	6206ZZ

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.  
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
  2. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

CERTIFIED DATA

CUSTOMER: \_\_\_\_\_ P.O. NO.: \_\_\_\_\_ TAG NO.: \_\_\_\_\_

MOTOR MODEL NO.: **0026XPEA31A-P** TOSHIBA FILE NO.: \_\_\_\_\_

HP: **2** RPM (SYN.): **1200** VOLTAGE: **230/460** Hz: **60**

FRAME SIZE: **184T** LOG NO.: \_\_\_\_\_ LOG REV. LEVEL: \_\_\_\_\_

REMARKS: \_\_\_\_\_

PER: \_\_\_\_\_ ISSUE DATE: \_\_\_\_\_ SUPERSEDES: \_\_\_\_\_

**TOSHIBA INTERNATIONAL CORPORATION**  
**Industrial Division / Houston Motor Plant**

**SQUIRREL CAGE INDUCTION MOTOR  
 PERFORMANCE SPECIFICATIONS**

INDEX	MPCF-1033
SHEET NO.	1 of 1
ISSUED	11/08/96
SUPERSEDES	10/06/95
REVISION	1
WRITTEN BY	R. EVANS
APPROVED BY	<i>Jay Bugbee</i>

Customer Tag:

CUSTOMER:  
 TIC SR No.:  
 Customer PO:

**MOTOR NAMEPLATE DATA**

H.P.: 2	VOLTS: 230/460	3 Ø / 60	Hz	S. RPM: 1200
FRAME: 184T	ENCL: TEXP	FLAMPS: 2.9		FLRPM: 1165
FORM: FBK1XX	S.F.: 1.15	NEMA DESIGN: B		INSUL CLASS: F
TYPE: IK	AMB.: 40C	CODE: L		DUTY: CONT.
MODEL No.: 0026XPEA31A-P		kW: 1.5		Serial No.:
NOM. EFF.: 88.5	MIN. EFF.:	P.F.:0.7		

<b>AMPERAGE</b> Locked Rotor: 23	<b>TORQUES</b> FULL LOAD (lb-ft.): 9.00 LOCKED ROTOR (%): 250 BREAK DOWN (%): 310	<b>** BEARINGS:</b> Drive End: 6207ZZ Opposite Drive End: 6206ZZ
-------------------------------------	--	--

<b>EFFICIENCY (%)</b> FULL LOAD: 88.5 3/4 LOAD: 88.7 1/2 LOAD: 86.5	<b>POWER FACTOR (%)</b> FULL LOAD: 73.0 3/4 LOAD: 65.5 1/2 LOAD: 53.0
--	--

ALL CHARACTERISTICS ARE AVERAGE EXPECTED VALUES BASED UPON RATED VOLTAGE, FREQUENCY AND SINEWAVE POWER INPUT.

\* TEMPERATURE RISE WILL BE CONSISTENT WITH INSULATION, AMBIENT AND SERVICE FACTOR AS DEFINED BY NEMA-MG-12.43 OR -20.40.

\*\* BEARINGS ARE THE ONLY RECOMMENDED SPARE PART(S).

**CERTIFIED BY:**  
**DATE:**

**TOSHIBA**

Reliability in Motion

**TOSHIBA INTERNATIONAL CORPORATION**

INDUSTRIAL DIVISION

PO BOX 40906

HOUSTON TX 77240

(713) 466-0277

(800) 231-1412

FAX (713) 466-8773

**SPARE PARTS (RECOMMENDED)**

OTHER THAN THE GREASE USED FOR RE-GREASABLE BEARINGS, **TOSHIBA** ADVISES THAT THERE ARE NO "USE" PARTS. THE ONLY INSURANCE SPARES THAT **TOSHIBA** SUGGESTS FOR THESE SQUIRREL CAGE INDUCTION MOTORS ARE INDUSTRY STANDARD, AND COMMERCIALY AVAILABLE ANTI-FRICTION BEARINGS, AS NOTED BELOW.

MOTOR COMPONENTS (SUCH AS TERMINAL BOXES, FAN COVERS, MACHINED PARTS) ARE AVAILABLE UPON SPECIAL REQUEST. IN THIS CASE, PLEASE ADVISE OUR ORDER ENTRY DEPARTMENT THE MODEL AND SERIAL NUMBERS (FOUND ON THE MOTOR NAMEPLATE) , AND A DESCRIPTION OF THE COMPONENT REQUIRED. THEY WILL THEN FURNISH THE CURRENT PART NUMBER, PRICE AND AVAILABILITY.

(NOTE: OUR INTERNAL PART NUMBERS ARE SUBJECT TO CHANGE WITHOUT NOTICE, AND ARE NOT PUBLISHED).


PLEASE ADVISE IF YOU HAVE ANY QUESTIONS.

CUSTOMER:  
PURCHASE ORDER #  
Customer Tag:

TOSHIBA FILE #  
MODEL # 0026XPEA31A-P  
HP / RPM / ENCL / FRAME: 2 / 1200 / TEXP / 184T  
DRIVE END BEARING: 6207ZZ  
OPPOSITE DRIVE END BEARING: 6206ZZ

**Prepared By:**  
**Date:**

Three Phase Motor Wiring Diagram
"Across the line" (Full Voltage) Starting

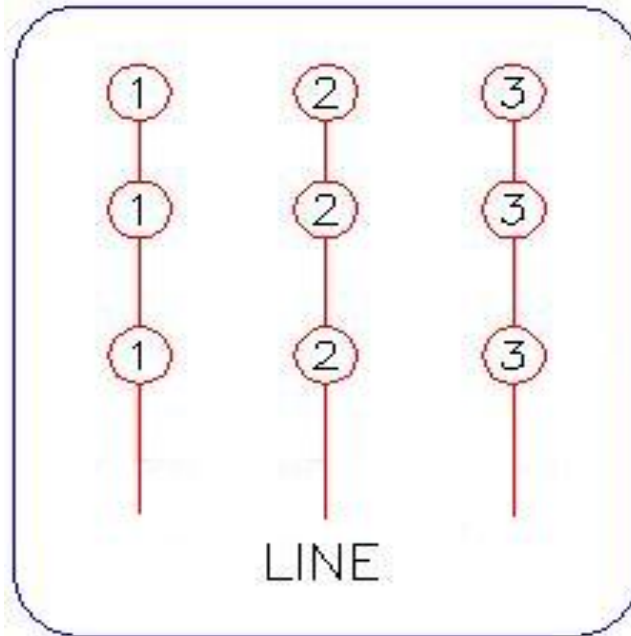

Customer Name:	
PO No.:	
Customer Tag:	
TIC File No.:	
Motor Model No. 0026XPEA31A-P	

For Further Information Regarding Toshiba motor starting, maintenance or wiring,  
Please refer to the "Toshiba - A Quality Product for World Energy" Installation and  
Maintenance Manual, or contact the Toshiba Low Voltage Motor Marketing Department.  
(800) 231-1412

Prepared By  
Date: