Downloaded from DealersIndustrialEquipment -- Visit https://DealersElectric.com or call (908) 688-1966 for all of your Teco needs!

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	kW.					
AEEAGD	450	336	4	CONT.	460	60	1800

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

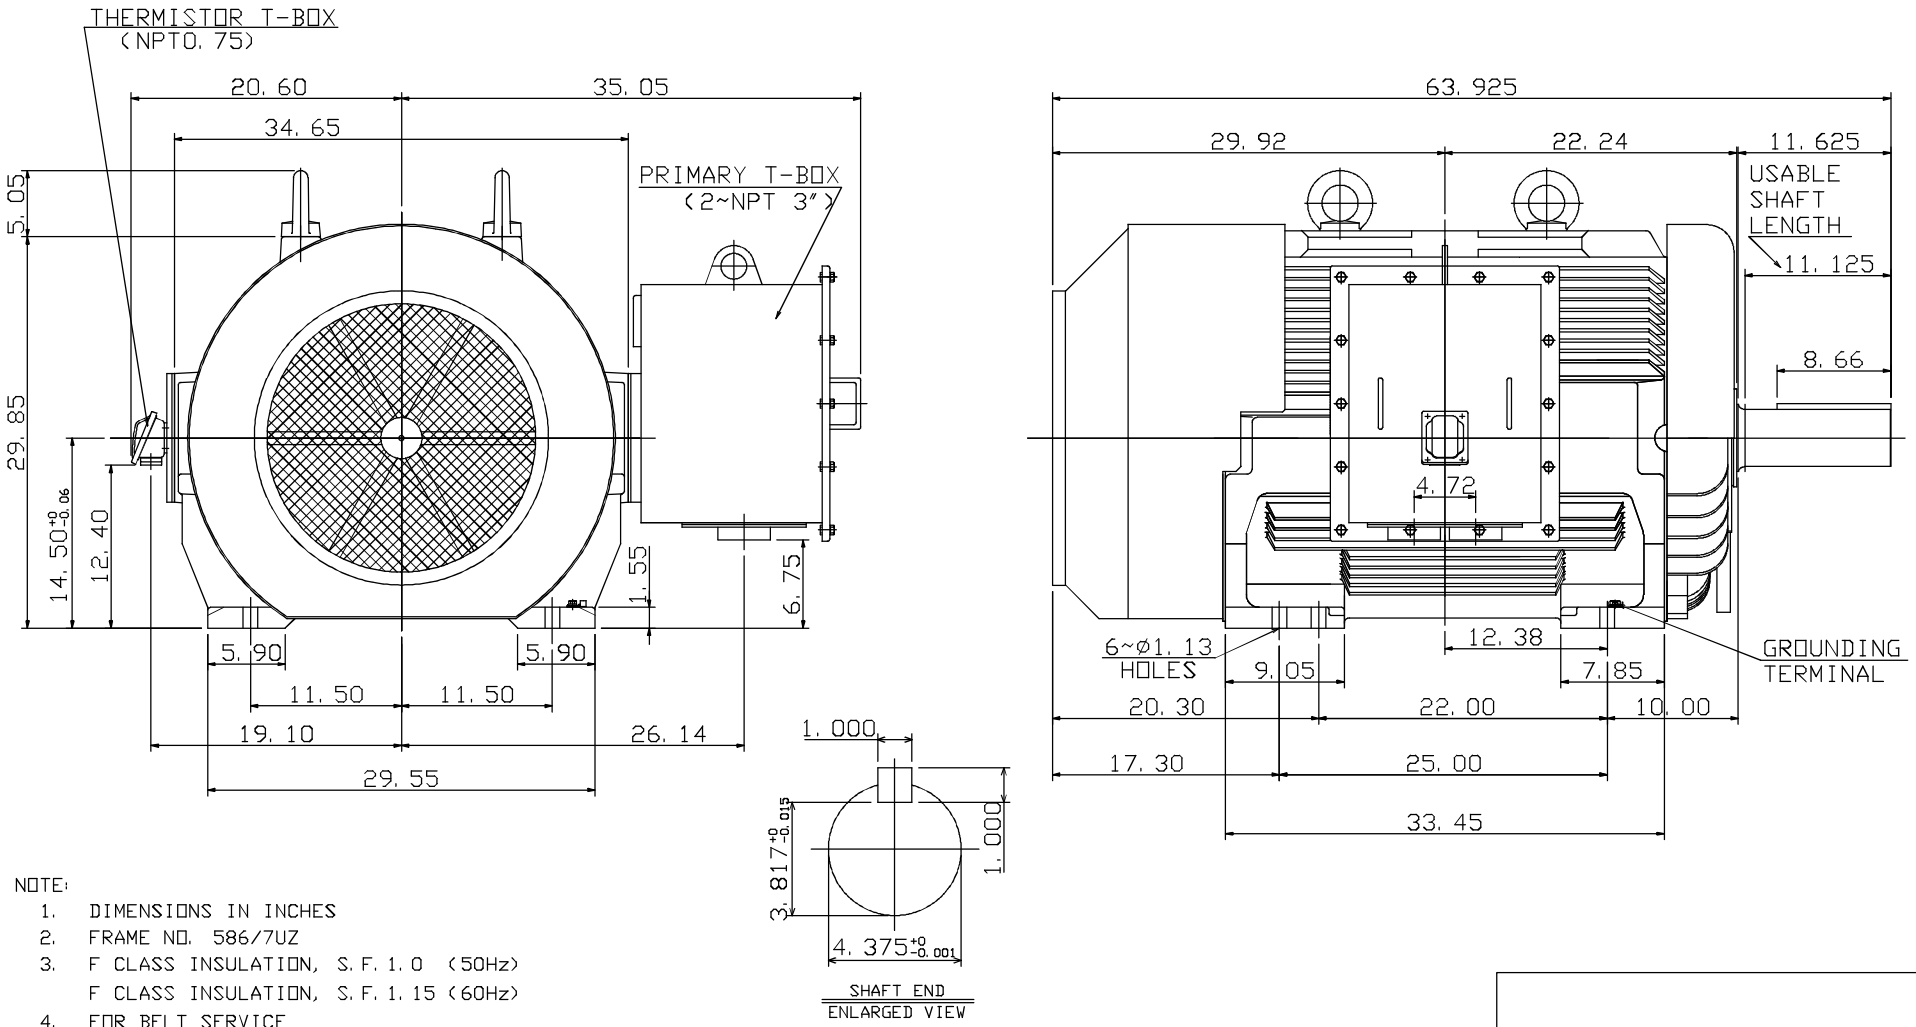

NOTE:

1. DIMENSIONS IN INCHES
2. FRAME NO. 586/7UZ
3. F CLASS INSULATION, S. F. 1. 0 (50Hz)
   F CLASS INSULATION, S. F. 1. 15 (60Hz)
4. FOR BELT SERVICE
5. BEARING SIZE: DRIVE END: NU326C3
   NON-DRIVE END: 6322C3
6. ENCLOSURE: IP55
7. WITH THERMISTOR: PTC 140°C 3PCS
8. SHAFT MATERIAL: SCM440 Q&T (AISI 4140 EQUIV)
9. MOTOR APPROX. WEIGHT: 4600 LBS

4A040Y700

DWN.	C. RAM	DEC 02 2015
DWN.	J. CHANG	APR•21•2015
CHKD.	H. HUANG	APR•21•2015
APPD.	C. LIU	APR•21 2015

CATALOG NO.
CD4504RZ

TECO Westinghouse

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

DWG NO. 4B040L196
REV: 00