


| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE V | Hz | SYN SPEED R.P.M |
|-------|--------|------|------|-------------|-----------|----|-----------------|
| | HP. | KW. | | | | | |
| AEH8N | 100 | 74.6 | 6 | CONT. | 190/380 | 50 | 1000 |

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

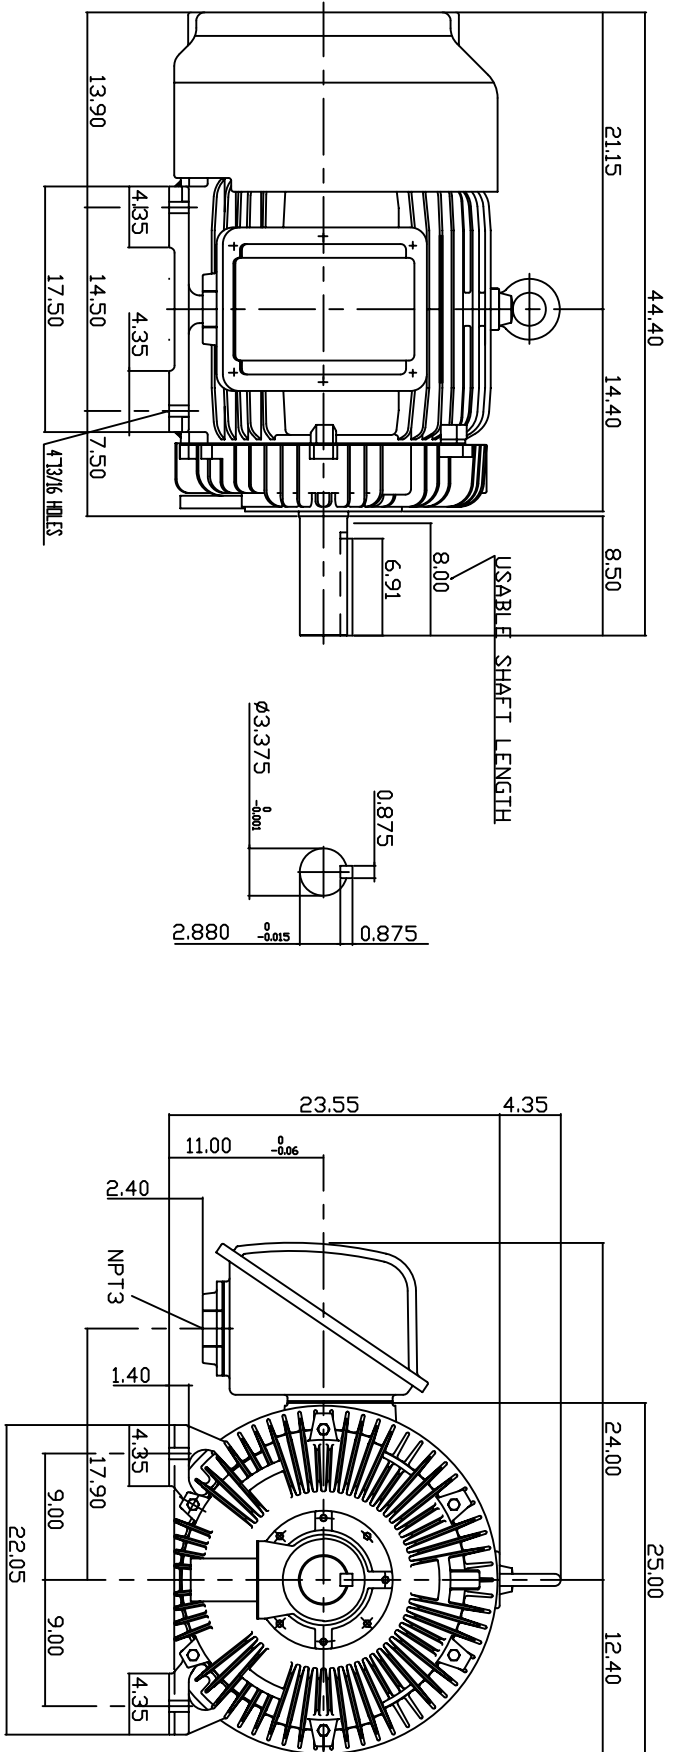

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 444T
3. F CLASS INSULATION, S.F.1.15
4. FOR BELTED APPLICATION
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: NU318
NON-DRIVE END: 6316
7. APPROX. WEIGHT: 1600 LBS

TW-56C

| | |
|---------------|-------------|
| DWN. N.QIN | JAN 13 2005 |
| CHKD. H.HUANG | JAN 13 2005 |
| APPD. C.WANG | JAN 13 2005 |

DATE 20050617
CAT. # EP1006R-50

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR



DWG NO. 3A040Y599
REV. 00