


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEH8N	125	93.3	4	CONT.	190/380	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

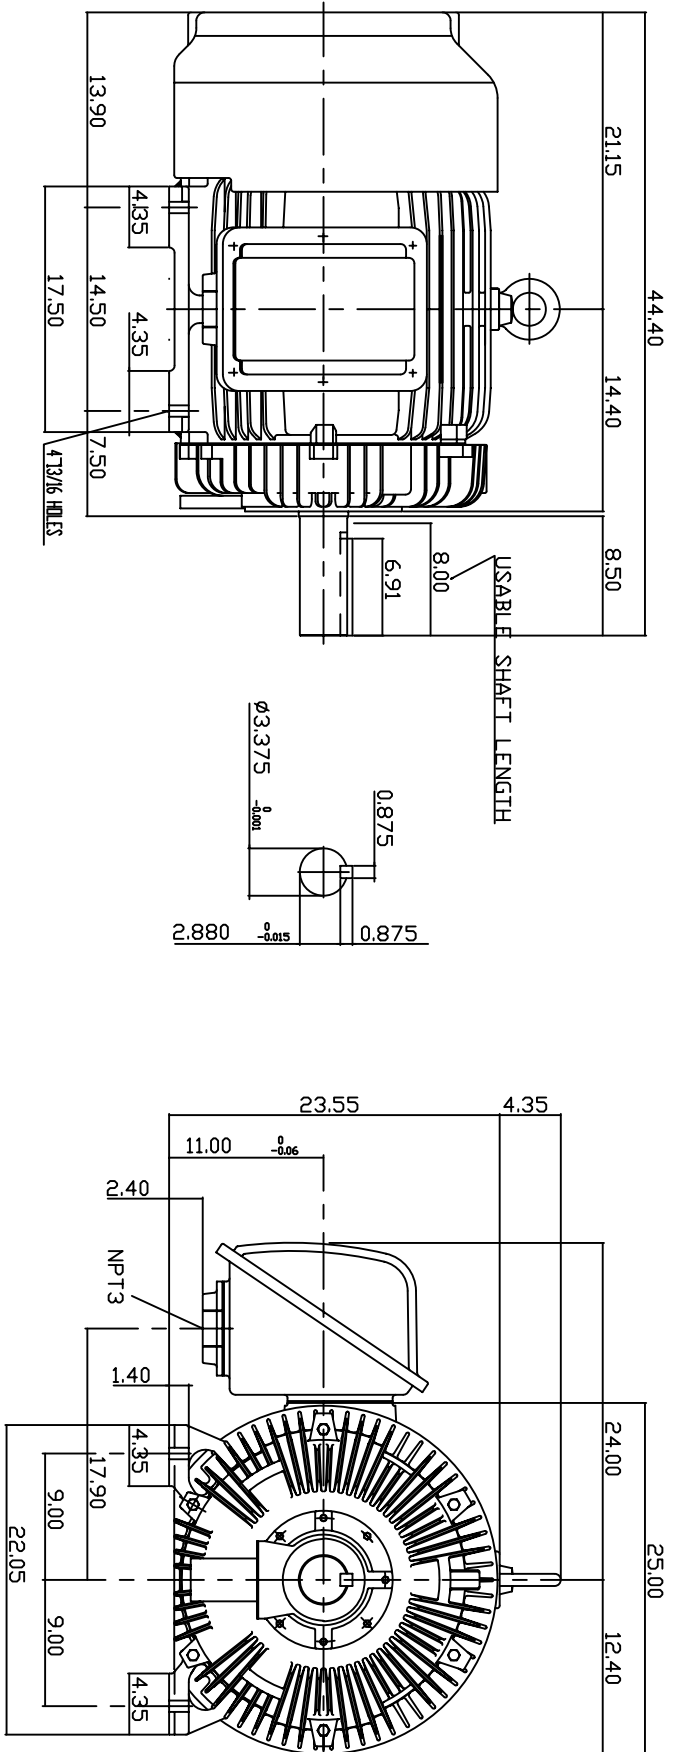

- NOTE:
1. DIMENSIONS IN INCH
  2. FRAME NO. 444T
  3. F CLASS INSULATION, S.F.1.15
  4. FOR BELTED APPLICATION
  5. ENCLOSURE: IP54
  6. BEARING SIZE: DRIVE END: NU318  
NON-DRIVE END: 6316
  7. APPROX. WEIGHT: 1600 LBS

TW-56C

DWN. N.QIN	JAN 13 2005
CHKD. H.HUANG	JAN 13 2005
APPD. C.WANG	JAN 13 2005

DATE 20050617  
 CAT. # EP1254R-50  
 3-PHASE INDUCTION MOTOR

**TECO** **Westinghouse**  
 DWG NO. 3A040Y599  
 REV. 00