


| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE | Hz | SYNSPEED R.P.M |
|--------|--------|-------|------|-------------|---------|----|----------------|
| | HP. | KW. | | | | | |
| AEHH8N | 150 | 111.9 | 2 | CONT. | 460 | 60 | 3600 |

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

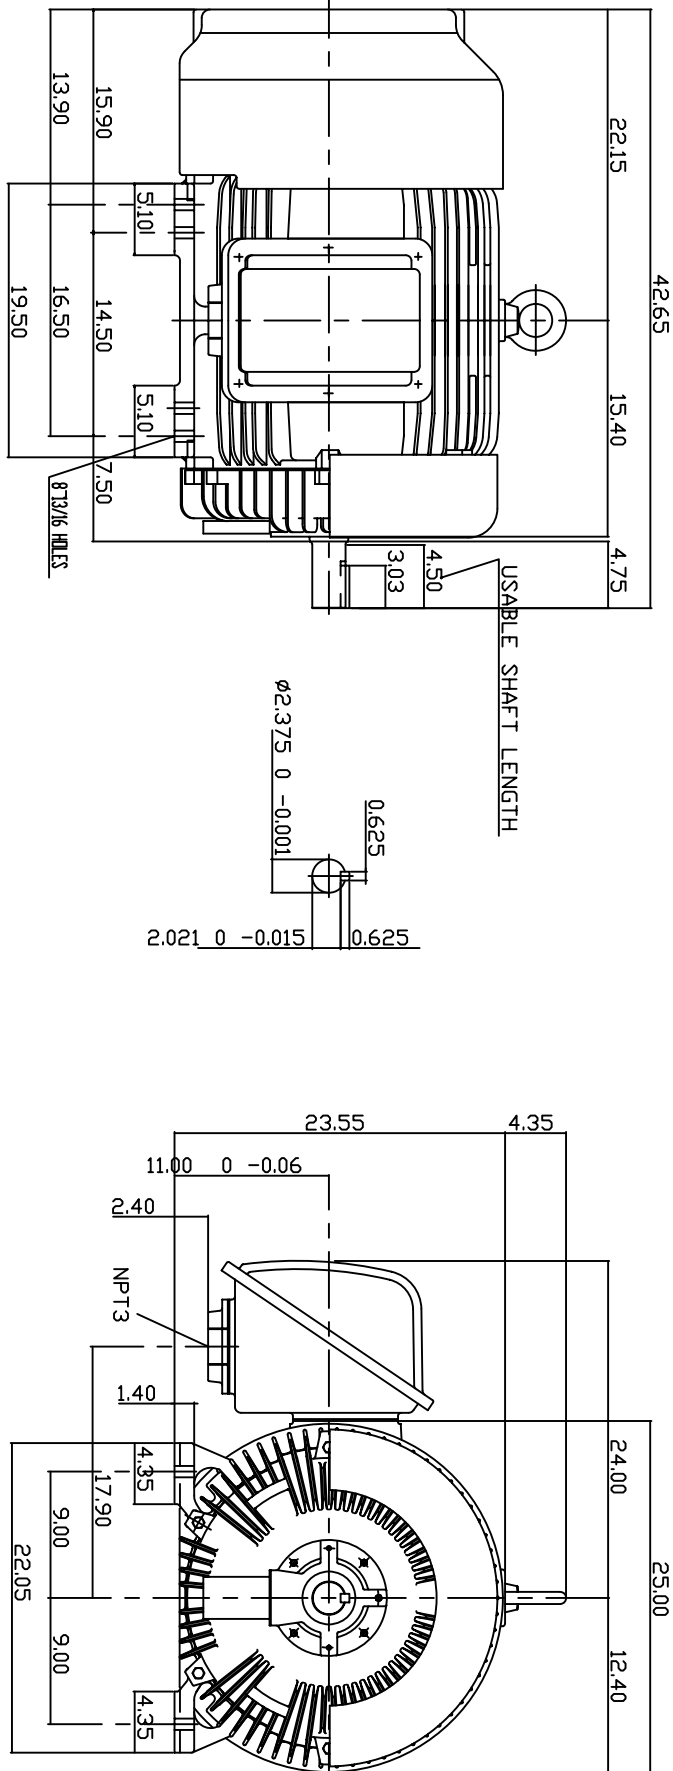

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 445TS
3. F CLASS INSULATION, S.F.115
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: 6314C3
NON-DRIVE END: 6314C3
7. APPROX. WEIGHT: 1550 LBS

TW-56C

| | | |
|-------|---------|-------------|
| DWN. | T.H.Pan | FEB 17 2005 |
| CHKD. | H.HUANG | FEB 17 2005 |
| APPD. | C.WANG | FEB 17 2005 |

| | |
|-------------------|-------------------------|
| DATE 20050616 | OUTLINE DIMENSIONS |
| CATALOG # EP1502 | 3-PHASE INDUCTION MOTOR |
| | |
| DWG NO. 3A040Y684 | REV: 00 |