


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHH8N	250	186.5	4	CONT.	460	60	1800

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

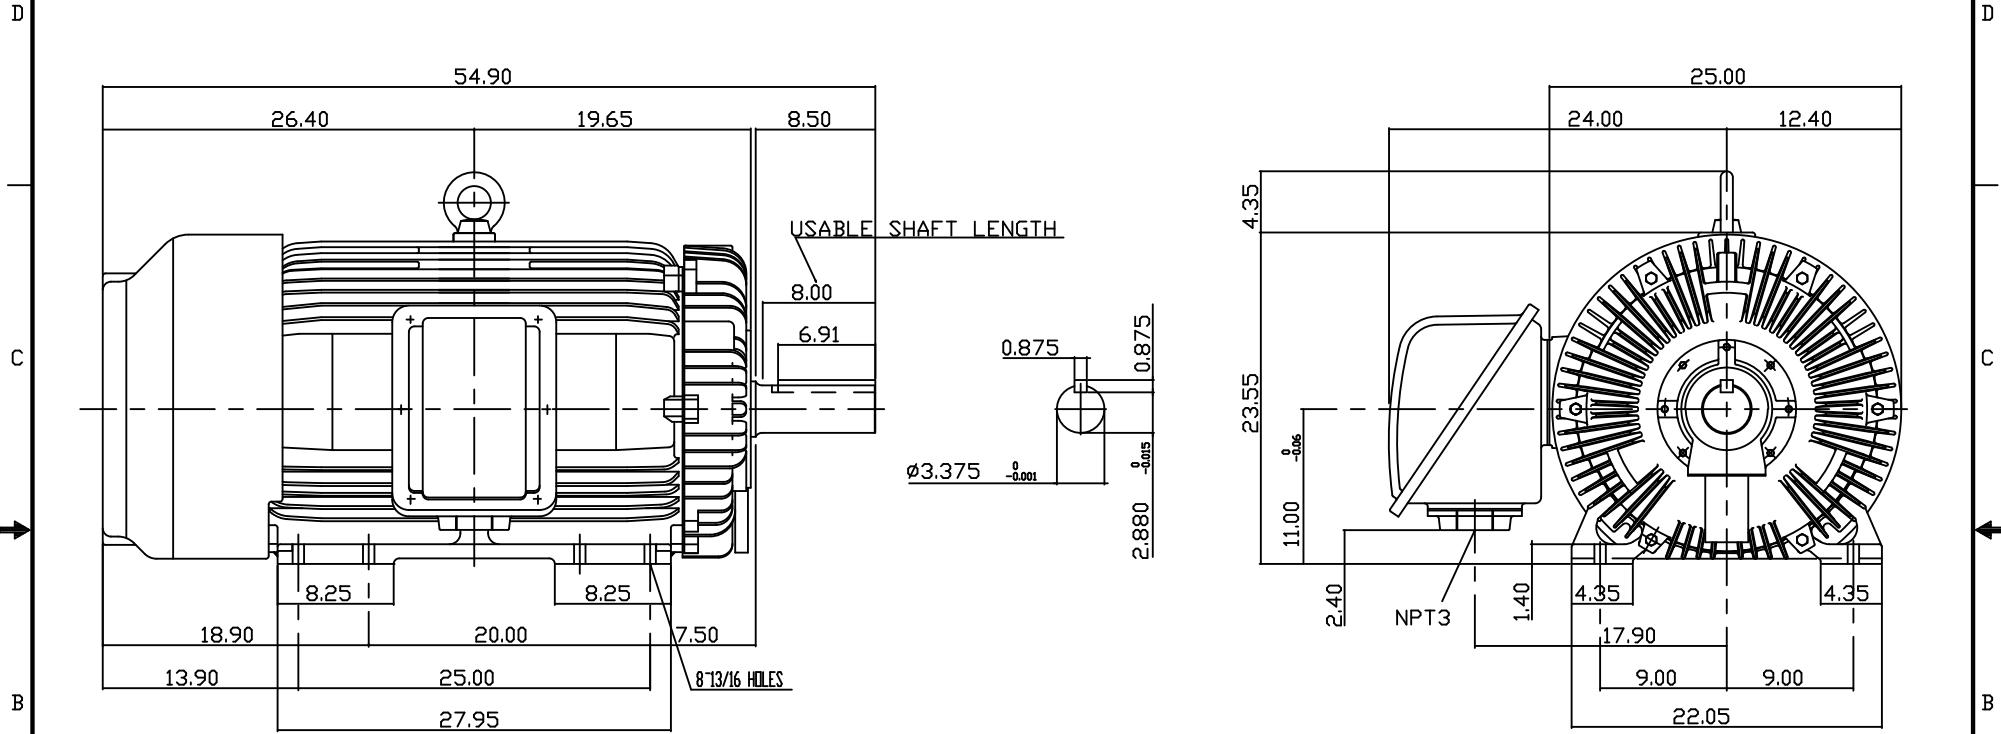

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: 6320
NON-DRIVE END: 6316
7. APPROX. WEIGHT: 2400 LBS

TW-56C

DATE 20050616		OUTLINE DIMENSIONS	
CATALOG #EP2504		3-PHASE INDUCTION MOTOR	
DWN. J.WANG	JAN 28 2005	TEC Westinghouse	DWG NO. REV: 00
CHKD. H.HUANG	JAN 28 2005		3A040Y647
APPD. C.WANG	JAN 28 2005		