TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP	KW					
AEJHTK	1250	930	4	CONT.	2300/4160	60	1800

TOTALLY ENCLOSED FAN COOLED TYPE. SQUIRREL CAGE ROTOR

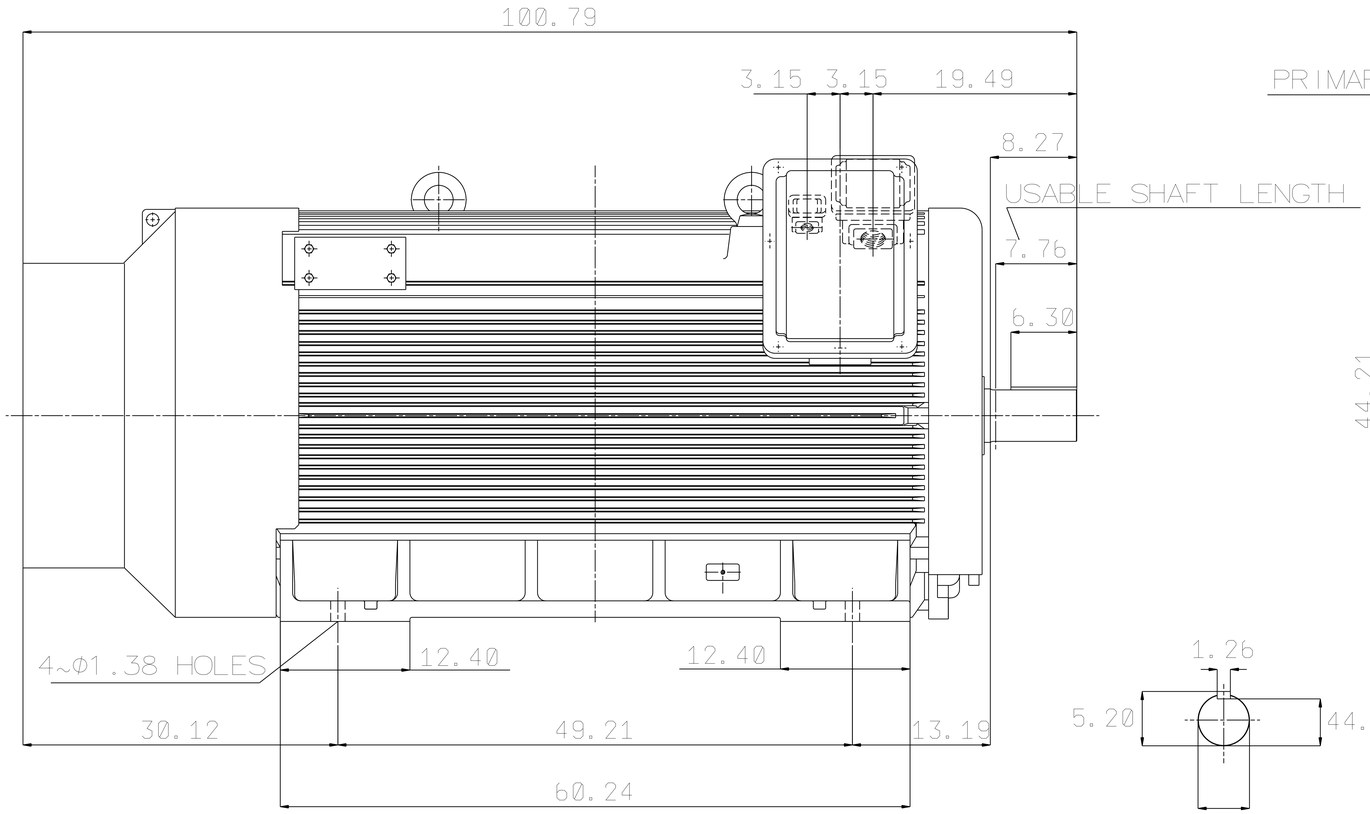

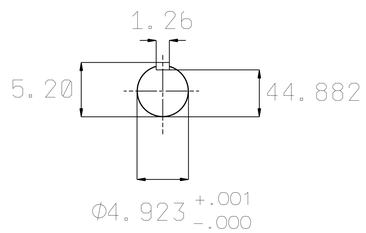

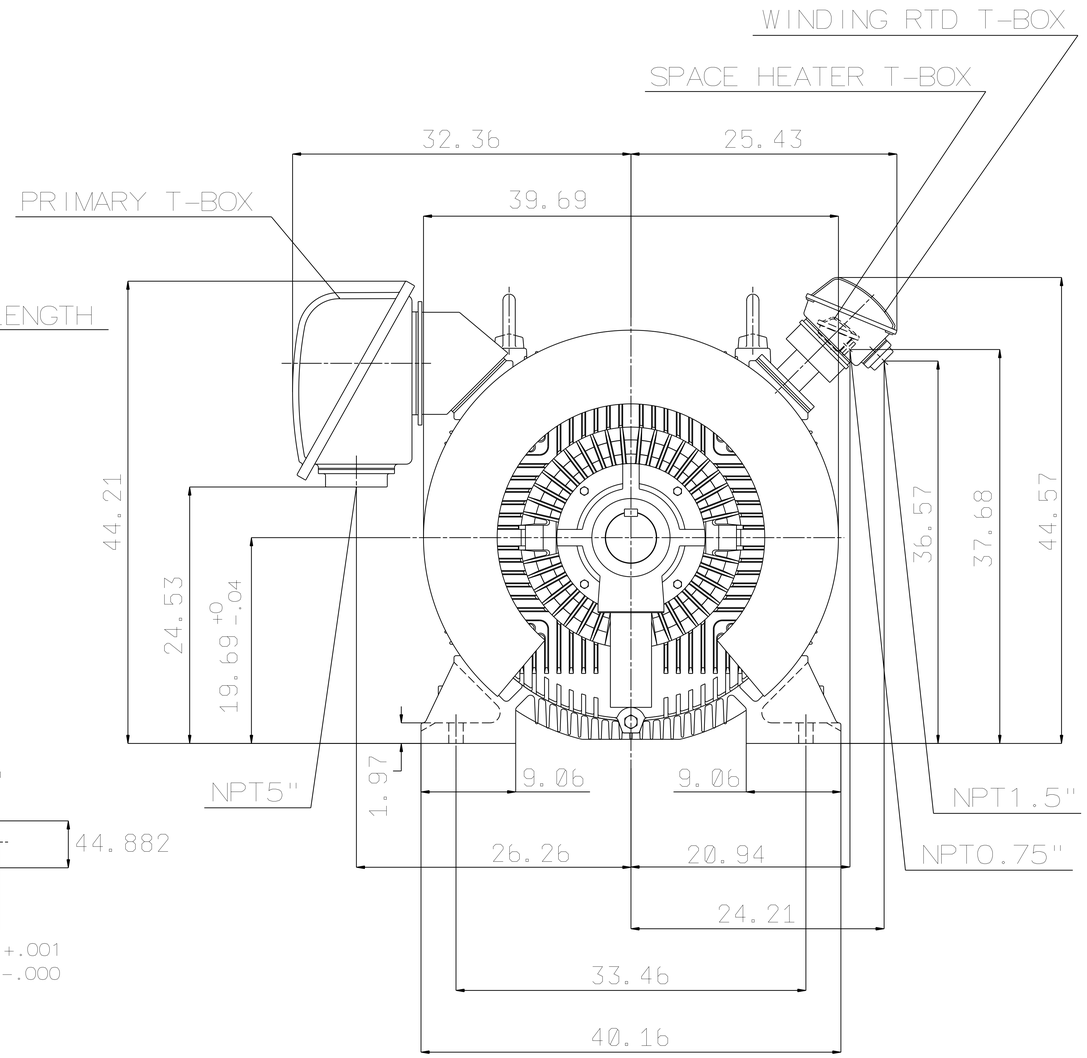

1. DIMENSIONS IN INCHES
2. FRAME NO. 500C
3. F CLASS INSULATION
4. FOR DIRECT FLEXIBLE COUPLING
5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 400 WATTS
6. WITH 100 OHM PLATINUM WINDING RTD'S 2/PHASE
7. BEARING SIZE: DRIVE END: 6326
   NON-DRIVE END: 6324M/C3 VL024
8. MOTOR APPROX. WEIGHT: 5100 KGS

TW-66C

DWN.	W.L.LIN	APR•22•2003
CHKD.	W.L.LIN	APR•22•2003
APPD.	C.WANG	APR•22•2003

DATE MAY 7, 2004

CATALOG NO. JH12504

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 3A040T4093 REV: 00

Downloaded from Dealers Industrial Equipment – Visit https://DealersElectric.com or call (908) 688-1966 for all of your Teco needs!