


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE	HZ	SYN. SPEED R.P.M.
	HP.	KW.					
ASHA	250	187	8	CONT.	2300/4160	60	900

WEATHER PROTECTED TYPE I. SQUIRREL-CAGE ROTOR

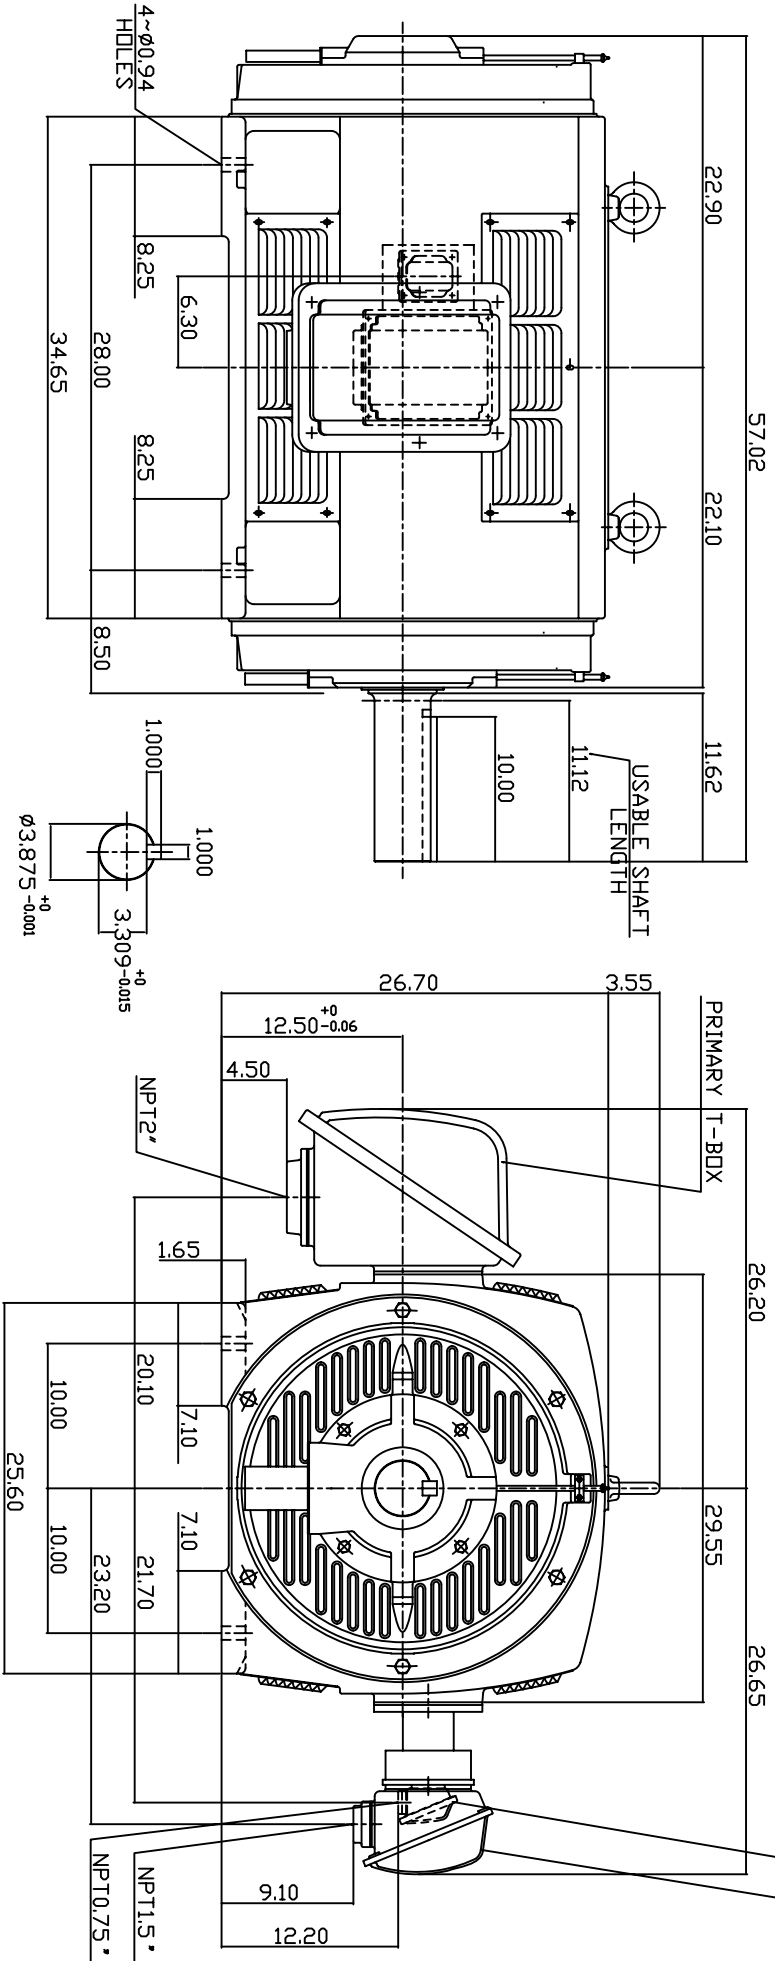

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 5009B
3. F. CLASS INSULATION, SF.1.15
4. FOR DIRECT DRIVE APPLICATIONS
5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 200 WATTS
6. 100 OHM PLATINUM WINDING RTD'S 2/PHASE
7. BEARING SIZE: DRIVE END: 6324 NON-DRIVE END: 6320
8. MOTOR APPROX. WEIGHT: 3800 LBS

TW-56C

DWN. APPD.	W.LLIN	C.WANG	APR-15-2003
CHKD.	W.LLIN		APR-15-2003

DATE	MAY 5, 2004	OUTLINE DIMENSIONS
CATALOG NO.	P2508	3-PHASE INDUCTION MOTOR

TECO Westinghouse DWG NO. 3A040T3773 REV: 00