

1 2 3 4 5 6 7 8

A


B

C

D

E

F

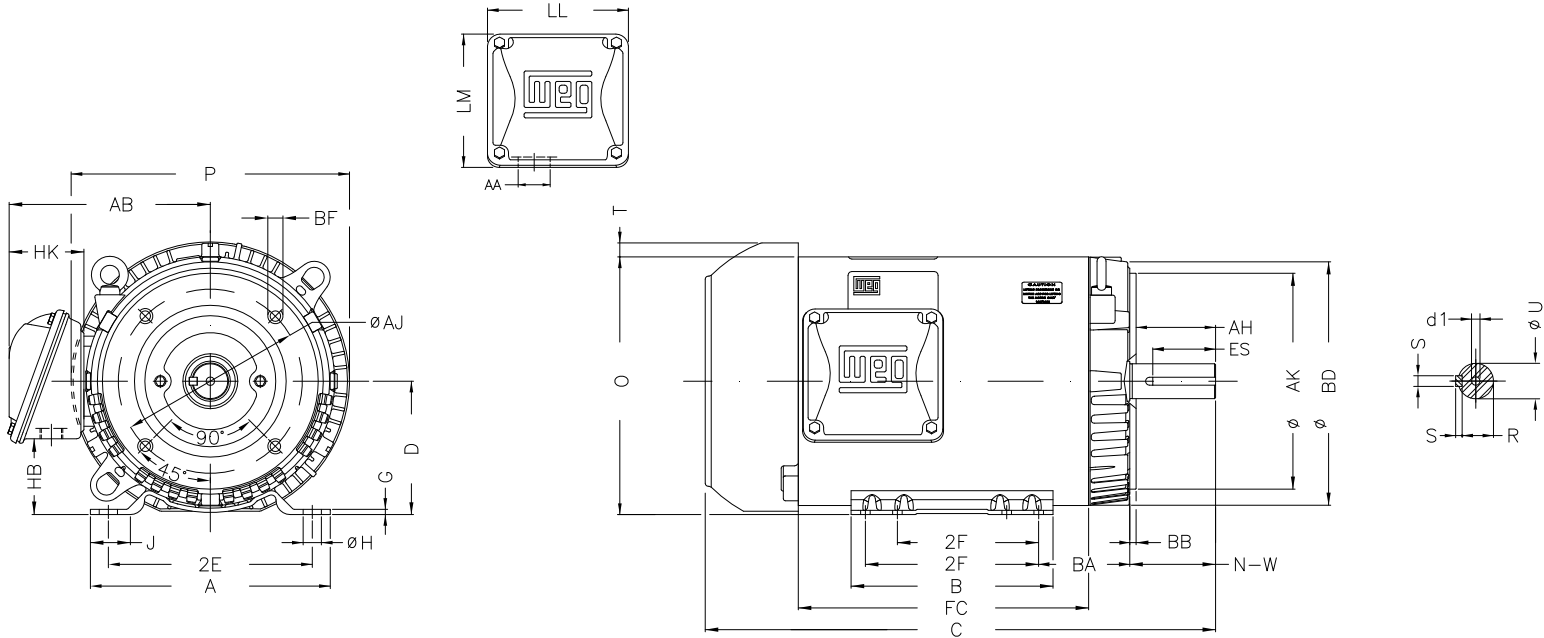

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #00312ET3E213TC-S

|             |              |                   |                  |             |
|-------------|--------------|-------------------|------------------|-------------|
| P<br>10.965 | AB<br>7.973  | J<br>1.575        | 2E<br>8.500      | A<br>9.449  |
| H<br>0.406  | G<br>0.167   | HB<br>2.982       | HK<br>3.022      | T<br>0.761  |
| O<br>10.144 | FC<br>10.630 | 2F<br>5.500/7.000 | B<br>7.953       | C<br>19.291 |
| BA<br>4.250 | N-W<br>3.380 | ES<br>2.480       | d1<br>A 4        | S<br>0.313  |
| U<br>1.375  | AA<br>1.377" | depth<br>0.313    | R<br>1.203       | LL<br>5.551 |
| LM<br>5.250 | D<br>5.250   | CH<br>1.929       | Flange<br>FC-184 | AJ<br>7.250 |
| AK<br>8.500 | BD<br>9.401  | BF<br>UNC 1/2"x13 | BB<br>0.250      | AH<br>3.129 |

Performed by:

Checked:

Customer:

Three Phase: W01 (Rolled Steel) - TEFC - NEMA Premium Efficiency

Three-phase induction motor  
Frame 213/5T - IP55

12-SEP-2016

