

1 2 3 4 5 6 7 8

A


B

C

D

E

F

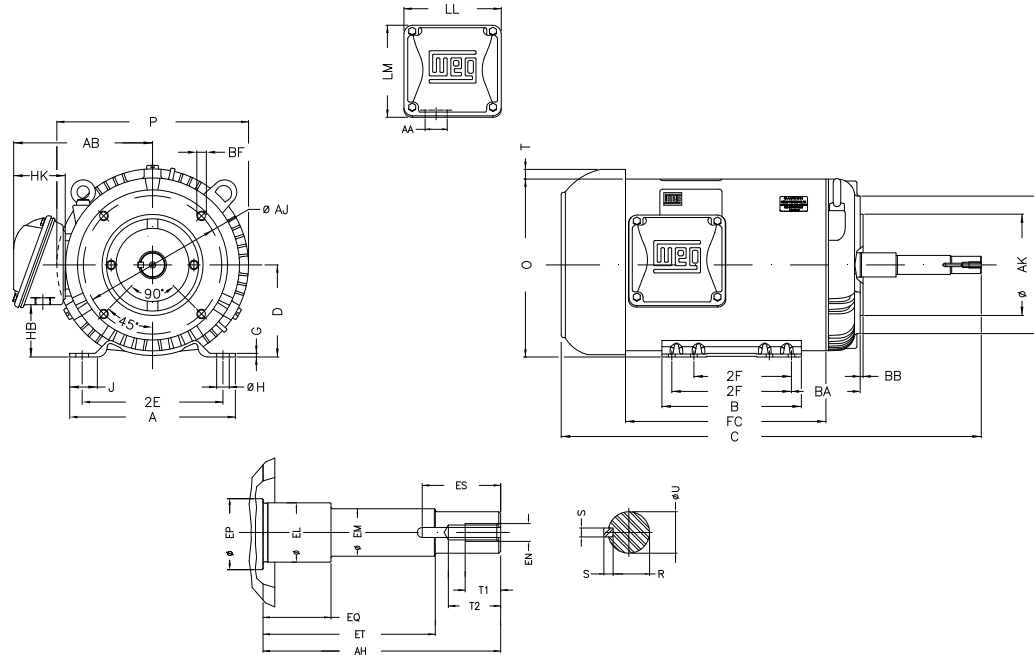

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #00536EP3E184JP-S

| | | | | |
|-------------------|-------------------|------------------|--------------|-------------|
| 2E 7.500 | J 1.299 | A 8.661 | P 9.435 | AB 6.696 |
| 2F 4.500/5.500 | B 6.299 | BA 3.500 | D 4.500 | G 0.167 |
| O 8.557 | T 0.661 | H 0.406 | AA 1.118" | ER 7.319 |
| EQ 1.563 | ET 5.941 | U 0.8745 | EM 1.000 | EL 1.250 |
| EP 1.376 | ES 1.654 | t1 0.748 | t2 1.102 | C 21.299 |
| CH 1.377 | FC 9.055 | Flange FC-149 | AJ 5.874 | AK 4.500 |
| BD 6.496 | BF UNC 3/8"x16 | BB 0.138 | AH 7.319 | |

| | |
|--|-------------|
| Performed by: | |
| Checked: | |
| Customer: | |
| Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - TEFC - High | |
| Three-phase induction motor Frame 182/4JP - IP55 | 13-SEP-2016 |

