

1 2 3 4 5 6 7 8

A


B

C

D

E

F

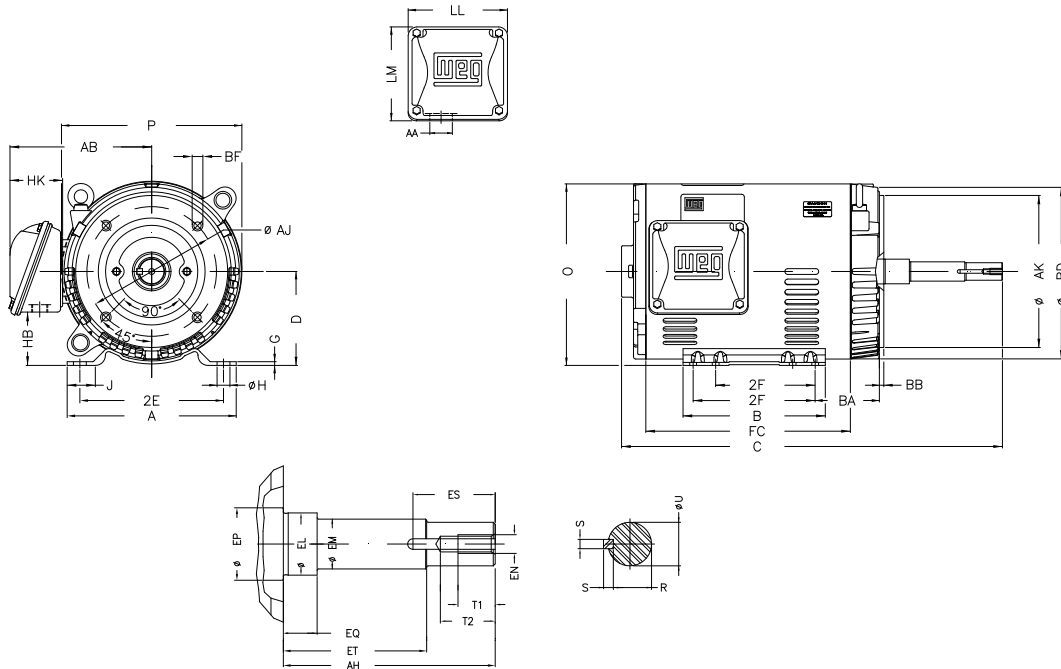

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #01018OT3E215JM-SG

|                   |                   |                  |              |             |
|-------------------|-------------------|------------------|--------------|-------------|
| 2E<br>8.500       | J<br>1.575        | A<br>9.449       | P<br>9.846   | AB<br>7.973 |
| 2F<br>5.500/7.000 | B<br>7.953        | BA<br>4.250      | D<br>5.250   | G<br>0.167  |
| O<br>10.144       | T<br>0.029        | H<br>0.406       | AA<br>1.377" | ER<br>4.258 |
| EQ<br>0.630       | ET<br>2.880       | U<br>0.8745      | EM<br>1.000  | EL<br>1.250 |
| EP<br>1.769       | ES<br>1.575       | t1<br>0.748      | t2<br>1.102  | C<br>17.717 |
| CH<br>1.929       | FC<br>10.236      | Flange<br>FC-184 | AJ<br>7.250  | AK<br>8.500 |
| BD<br>9.401       | BF<br>UNC 1/2"x13 | BB<br>0.250      | AH<br>4.258  |             |

|  |   |
|--|---|
| Performed by:                                      |   |
| Checked:   |   |
| Customer:  | W01 (Rolled Steel) Close Coupled Pump ODP - JM Type |
| Three-phase induction motor<br>Frame 213/5JM - ODP | 13-SEP-2016   |

