

1 2 3 4 5 6 7 8

A


B

C

D

E

F

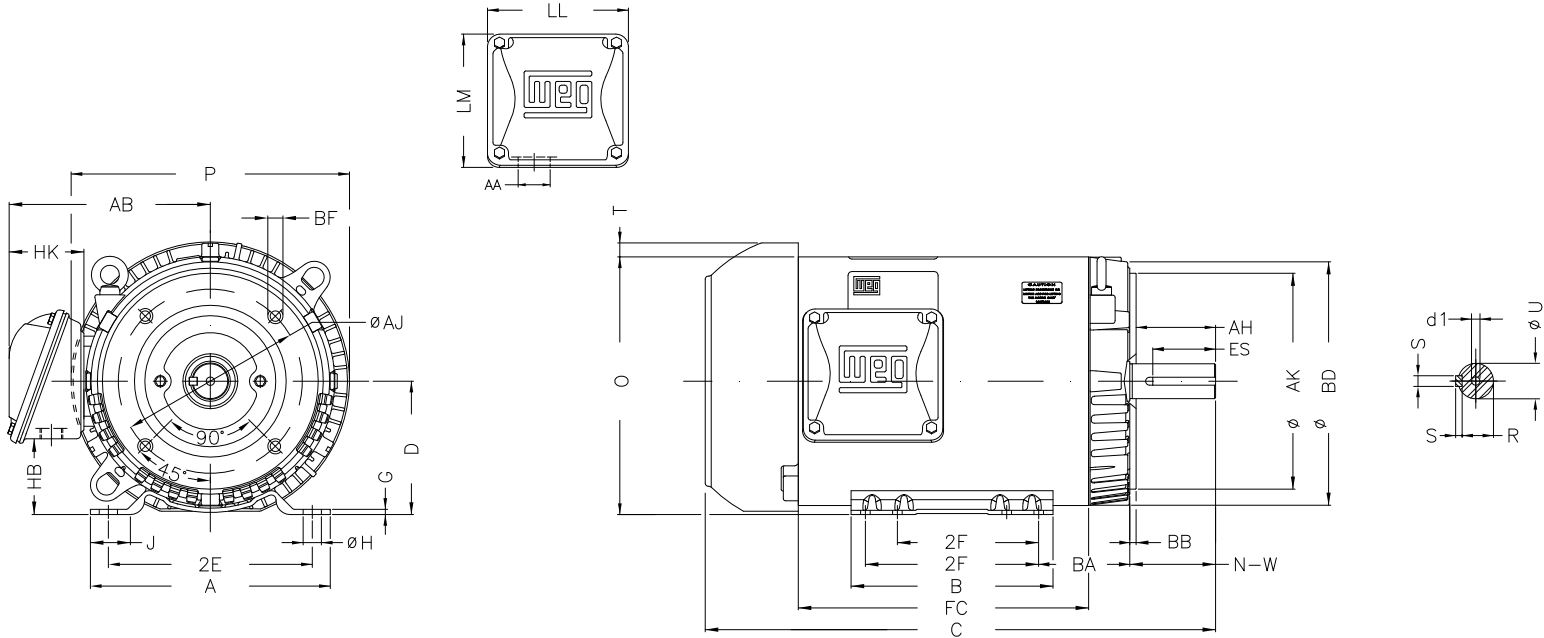

Notes: Downloaded from <http://dealerselectric.com>  
Generated for Model #01518ET3E254TC-S

|             |              |                    |                  |             |
|-------------|--------------|--------------------|------------------|-------------|
| P<br>13.180 | AB<br>9.448  | J<br>1.693         | 2E<br>10.000     | A<br>11.417 |
| H<br>0.530  | G<br>0.187   | HB<br>3.631        | HK<br>3.645      | T<br>0.830  |
| O<br>12.010 | FC<br>12.992 | 2F<br>8.252/10.000 | B<br>11.417      | C<br>22.559 |
| BA<br>4.750 | N-W<br>4.000 | ES<br>2.756        | d1<br>A 4        | S<br>0.375  |
| U<br>1.625  | AA<br>1.732" | depth<br>0.375     | R<br>1.416       | LL<br>6.299 |
| LM<br>6.017 | D<br>6.250   | CH<br>1.929        | Flange<br>FC-184 | AJ<br>7.250 |
| AK<br>8.500 | BD<br>11.084 | BF<br>UNC 1/2"x13  | BB<br>0.250      | AH<br>3.750 |

Performed by:

Checked:

Customer:

Three Phase: W01 (Rolled Steel) - TEFC - NEMA Premium Efficiency

Three-phase induction motor  
Frame 254/6T - IP55

23-SEP-2016

