

1 2 3 4 5 6 7 8

A


B

C

D

E

F

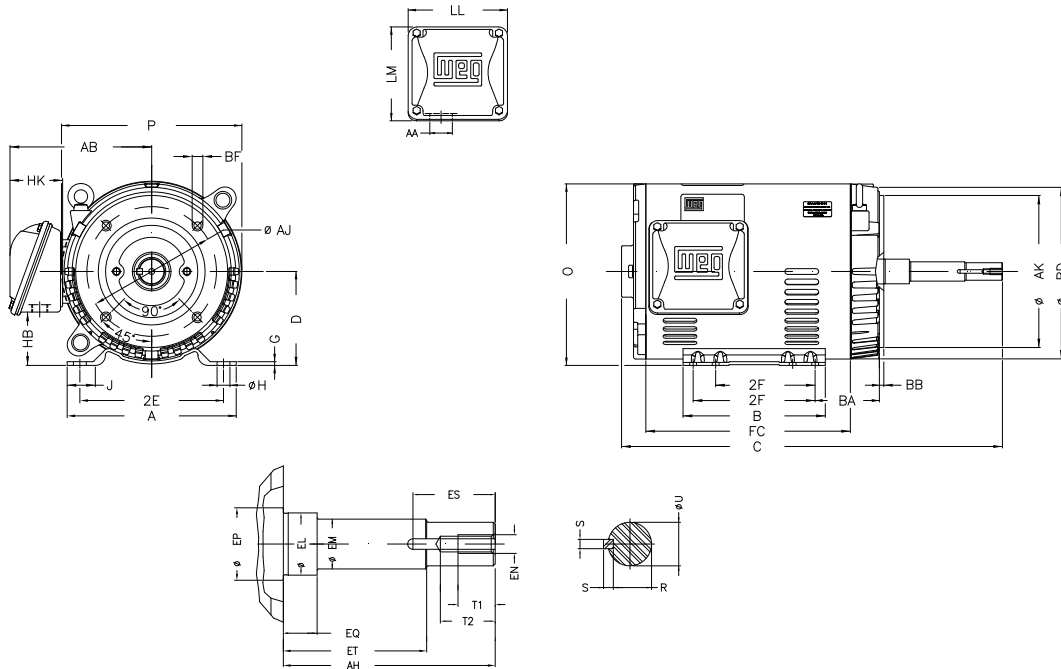

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #02536OT3E256JP-SG

| | | | | |
|--------------------|-------------------|------------------|--------------|-------------|
| 2E 10.000 | J 1.693 | A 11.417 | P 11.558 | AB 9.448 |
| 2F 8.252/10.000 | B 11.417 | BA 4.750 | D 6.250 | G 0.187 |
| O 12.010 | T 0.019 | H 0.530 | AA 1.732" | ER 8.130 |
| EQ 2.382 | ET 5.886 | U 1.249 | EM 1.375 | EL 1.750 |
| EP 1.769 | ES 2.559 | t1 1.024 | t2 1.496 | C 24.843 |
| CH 1.929 | FC 12.992 | Flange FC-184 | AJ 7.250 | AK 8.500 |
| BD 11.084 | BF UNC 1/2"x13 | BB 0.250 | AH 8.130 | |

| | |
|---|-------------|
| Performed by: | |
| Checked: | |
| Customer: | |
| W01 (Rolled Steel) Close Coupled Pump ODP - JP Type | |
| Three-phase induction motor Frame 254/6JP - ODP | 23-SEP-2016 |

