


1 2 3 4 5 6 7 8

A
B
C
D
E
F

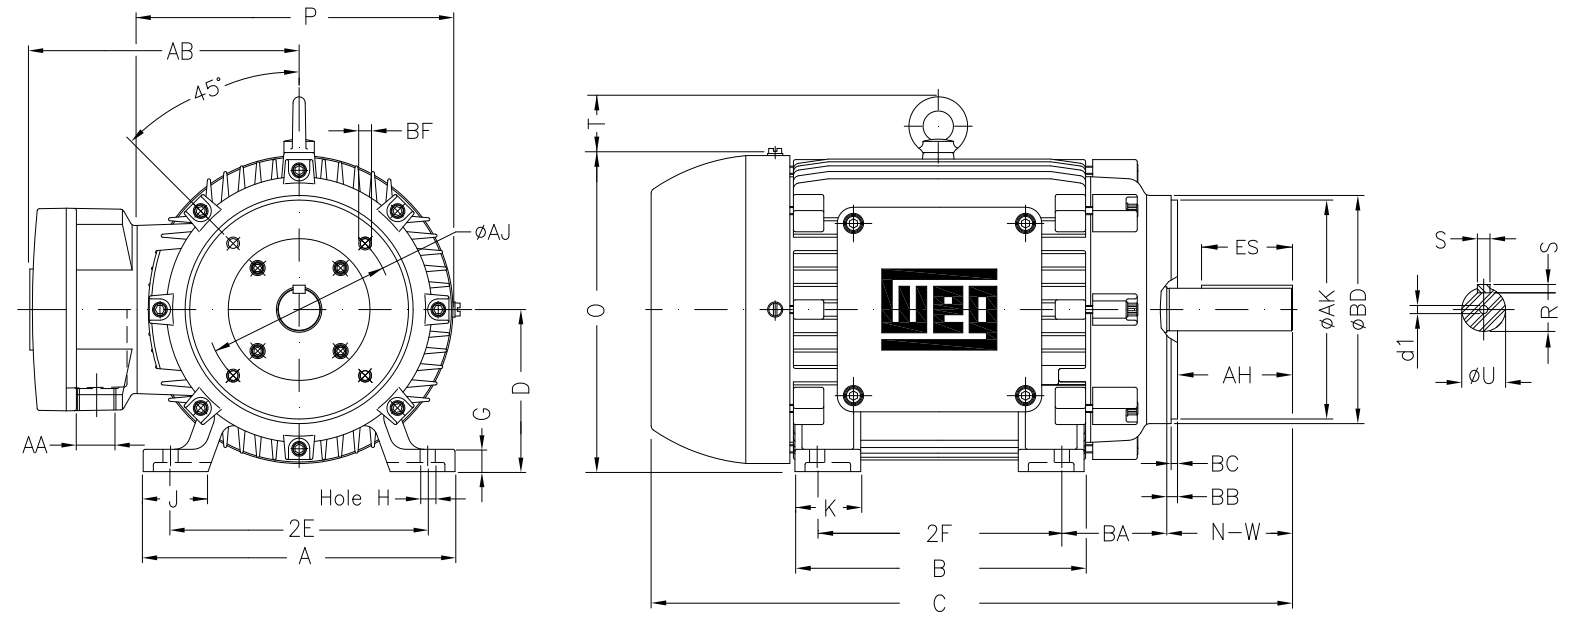

Notes: Downloaded from <http://dealerselectric.com>
Generated for Model #06018XT3E364TC

| | | | | |
|--------------|--------------|---------------------|--------------------|------------------|
| 2E 14.000 | A 17.165 | 2F 11.250/12.250 | B 15.394 | BA 5.875 |
| J 3.150 | K 4.134 | P 18.583 | ES 4.330 | depth 0.625 |
| S 0.625 | N-W 5.874 | U 2.375 | R 2.019 | AB 16.654 |
| D 9.000 | G 1.480 | O 18.898 | T 2.795 | H 0.657 |
| C 33.701 | AA NPT 3" | d1 DUNC 3/4"-10 | d2 DUNC 3/4"-10 | Flange FC-279 |
| AJ 11.000 | AK 12.500 | BD 15.562 | BF UNC 5/8"x11 | BB 0.250 |
| BC 0.250 | AH 5.625 | | | |

Performed by:
Checked:
Customer:
Three-Phase : Explosion Proof - NEMA Premium
Three-phase induction motor
Frame 364/5T - IP55
27-SEP-2016

