




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Single-phase induction motor - Squirrel cage rotor

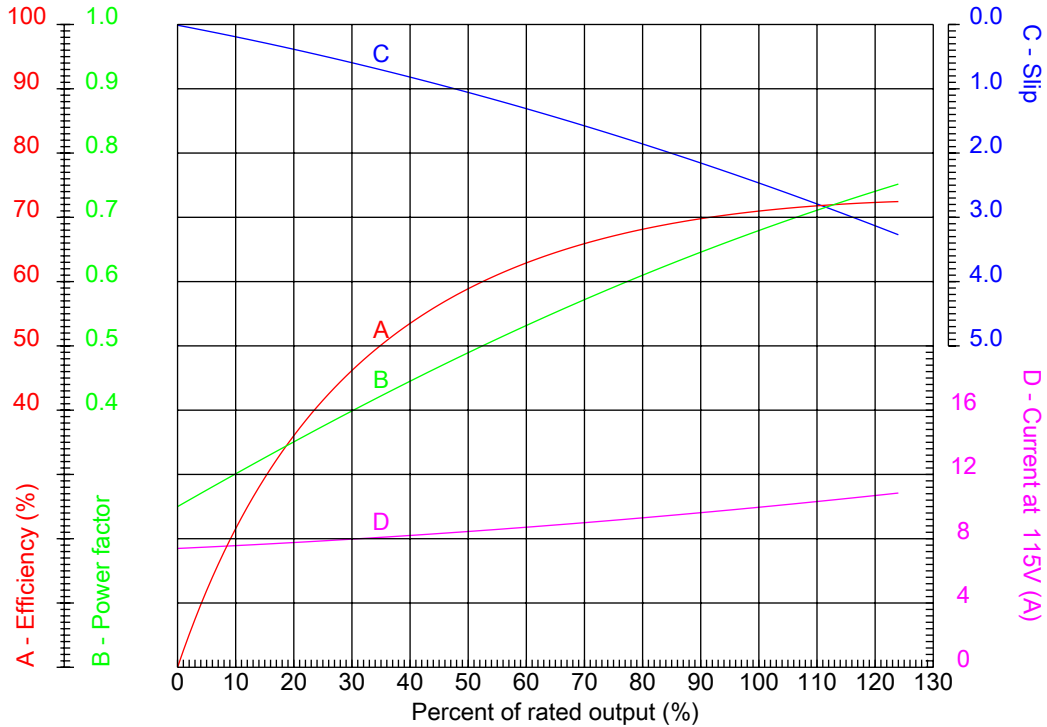

Customer :
 Product line : Single-Phase : NEMA 56 TEFC

| | |
|----------------------------------|--|
| Frame : F56H | Locked rotor current (I _L /I _n) : 5.4 |
| Output : 0.75 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 (1.00 at 208V) |
| Full load speed : 1170 rpm | Design : --- |
| Voltage : 115/208-230 V | Locked rotor torque : 230 % |
| Rated current : 10.0/4.80-5.00 A | Breakdown torque : 260 % |
| Insulation class : B | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7512ES1BF56C

Performed by

Checked