




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

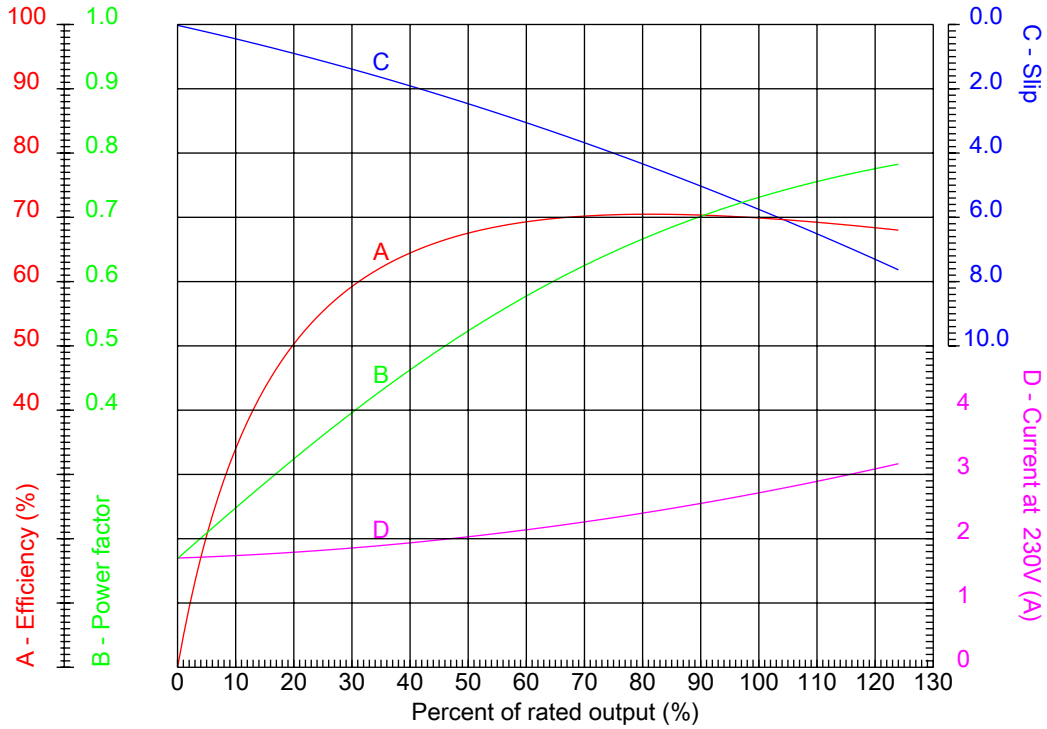

Customer :  
 Product line : Three-Phase : NEMA 56 Frames - ODP

Frame : D56	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) : 4.4
Output : 0.75 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15 (1.00 at 208V)
Full load speed : 1130 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 210 %
Rated current : 2.80-2.70/1.35 A	Breakdown torque : 220 %
Insulation class : B	

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #.7512OS3ED56C

Performed by

Checked