




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

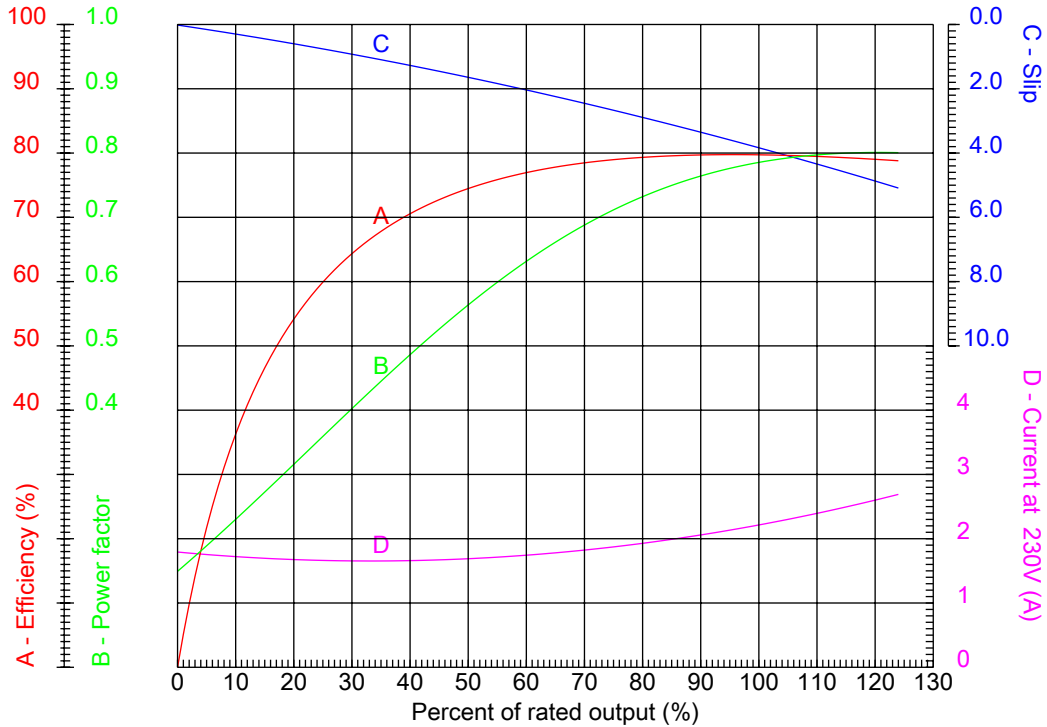

Customer :
 Product line : Three-Phase : NEMA 56 Frames - TEFC

Frame : B56	Locked rotor current (I _L /I _n) : 6.9
Output : 0.75 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15 (1.00 at 208V)
Full load speed : 1730 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 290 %
Rated current : 2.37-2.24/1.12 A	Breakdown torque : 320 %
Insulation class : F	

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7518ES3EB56CFL

Performed by

Checked