




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

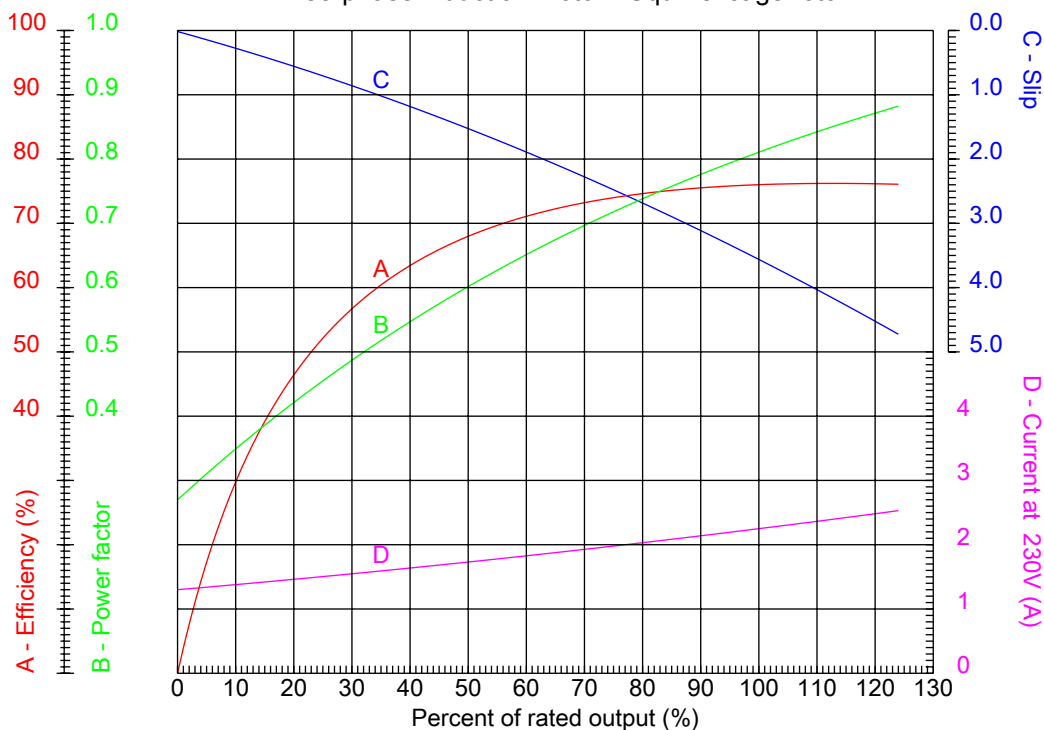

Customer :
Product line : Three-Phase : NEMA 56 Frames - TEFC

Frame : B56	Locked rotor current (I _L /I _n) : 7.7
Output : 0.75 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15 (1.00 at 208V)
Full load speed : 3470 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 380 %
Rated current : 2.40-2.30/1.15 A	Breakdown torque : 400 %
Insulation class : F	

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #.7536ES3EB56C

Performed by

Checked