




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

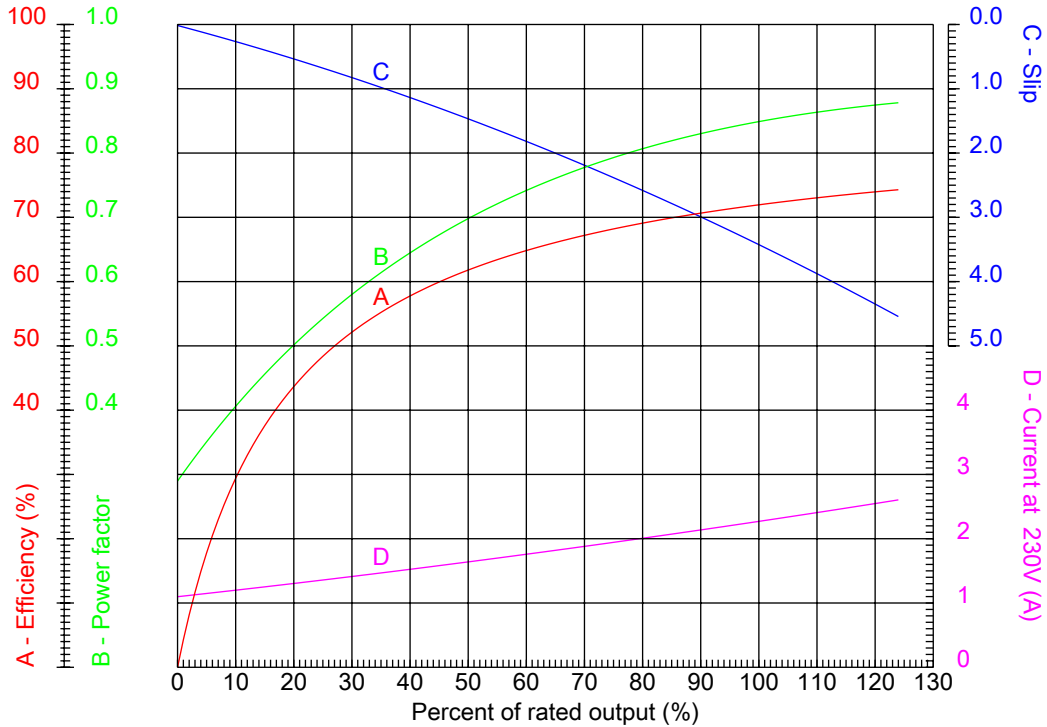

Customer :
 Product line : Jet Pump: Three-Phase - W01 (Rolled Steel) - Keyed - TEFC - Standard Efficiency

| | |
|----------------------------------|--|
| Frame : 56C | Locked rotor current (I _l /I _n) : 7.0 |
| Output : 0.75 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 3475 rpm | Design : A |
| Voltage : 208-230/460 V | Locked rotor torque : 250 % |
| Rated current : 2.50-2.26/1.13 A | Breakdown torque : 290 % |
| Insulation class : F | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536ES3EJPR56C-S

Performed by

Checked