




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

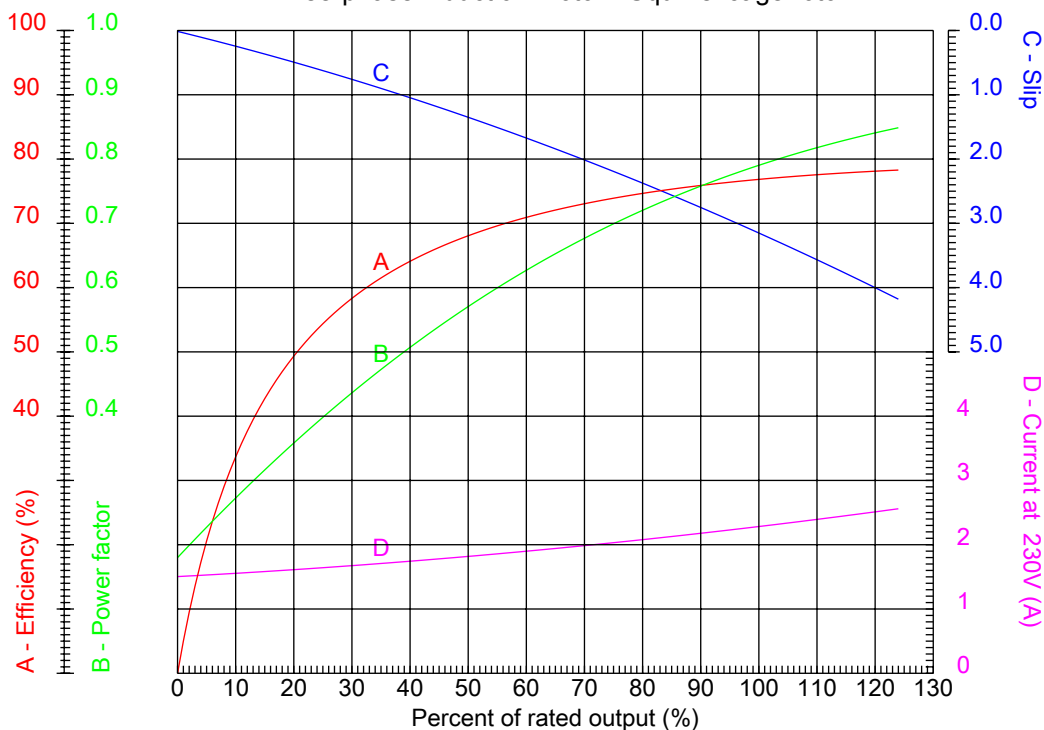

Customer :
 Product line : Three Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 56 | Locked rotor current (I _l /I _n) | : 6.5 |
| Output | : 0.75 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.25 |
| Full load speed | : 3485 rpm | Design | : A |
| Voltage | : 208-230/460 V | Locked rotor torque | : 240 % |
| Rated current | : 2.52-2.28/1.14 A | Breakdown torque | : 280 % |
| Insulation class | : F | | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #.7536OT3E56CFL-S

Performed by

Checked