




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

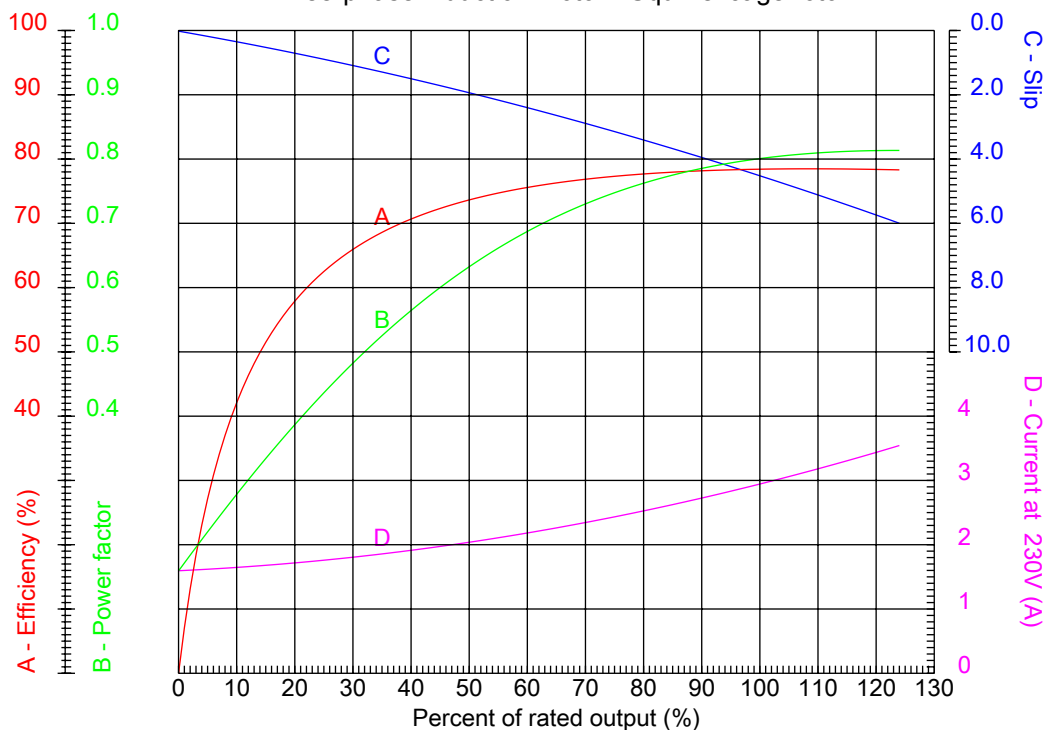

Customer :
 Product line : Three-Phase: W01 (Rolled Steel) - TEFC - Premium Efficiency (DOE)

| | |
|----------------------------------|--|
| Frame : W56 | Locked rotor current (I _l /I _n) : 8.8 |
| Output : 1 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 (1.00 at 208V) |
| Full load speed : 3435 rpm | Design : B |
| Voltage : 208-230/460 V | Locked rotor torque : 360 % |
| Rated current : 3.32-3.00/1.50 A | Breakdown torque : 380 % |
| Insulation class : F | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #00136ET3E56-S

Performed by

Checked