




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT Three-phase induction motor - Squirrel cage rotor

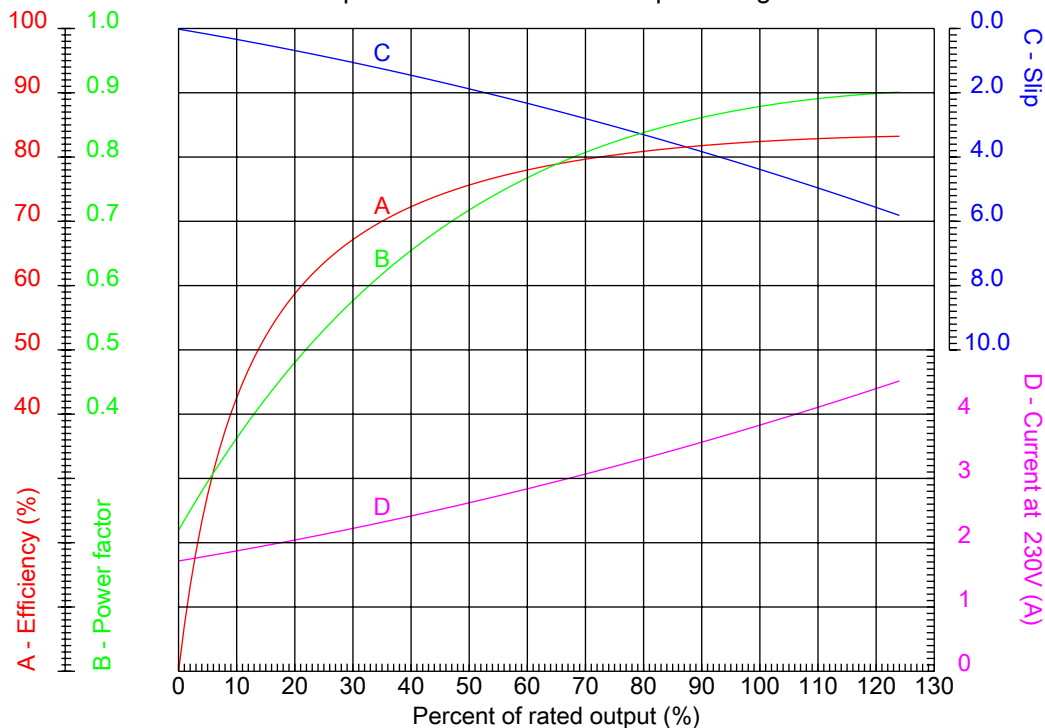

Customer :  
 Product line : Three-Phase : NEMA 56 Frames - TEFC

|                  |                    |  |                       |
|------------------|--------------------|--|-----------------------|
| Frame            | : B56              | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 8.5                 |
| Output           | : 1.5 HP           | Duty cycle   | : S1                  |
| Frequency        | : 60 Hz            | Service factor   | : 1.15 (1.00 at 208V) |
| Full load speed  | : 3440 rpm         | Design   | : A                   |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 450 %               |
| Rated current    | : 4.25-3.90/1.95 A | Breakdown torque                                       | : 350 %               |
| Insulation class | : F                |  |                       |

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #00156ES3EB56C

Performed by

Checked