




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

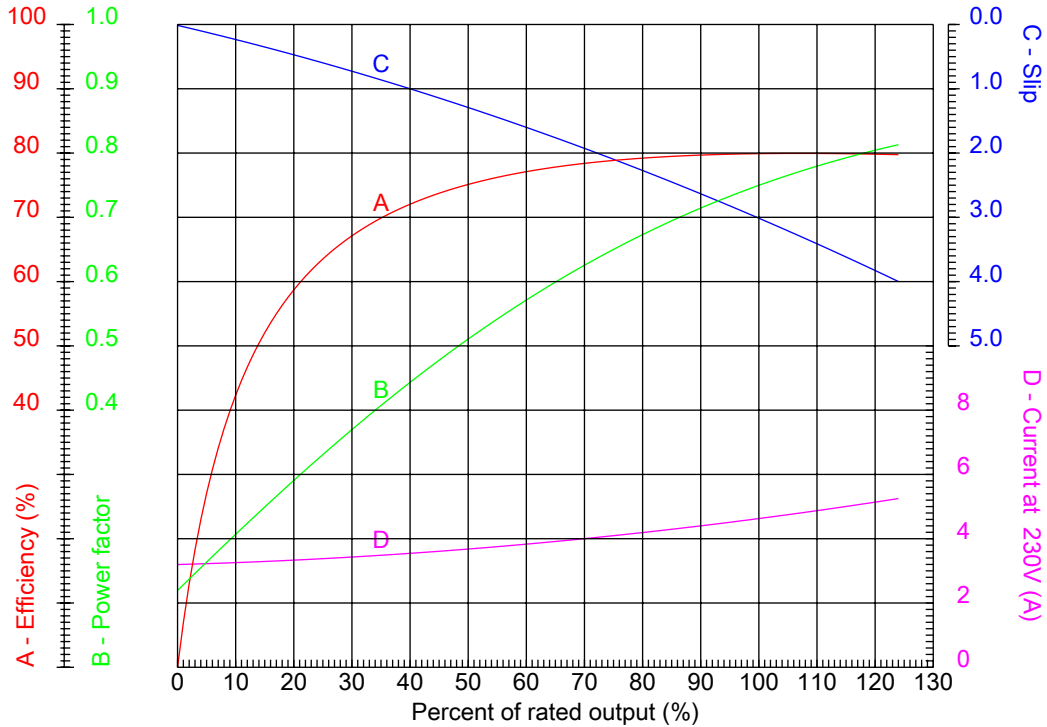

Customer :
Product line : Three Phase: W01 (Rolled Steel) - ODP - Standard Efficiency

Frame : 56H	Locked rotor current (I _L /I _n) : 6.9
Output : 1.5 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 1745 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 250 %
Rated current : 5.09-4.60/2.30 A	Breakdown torque : 280 %
Insulation class : F	

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00158OS3E56CFL-S

Performed by

Checked