




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

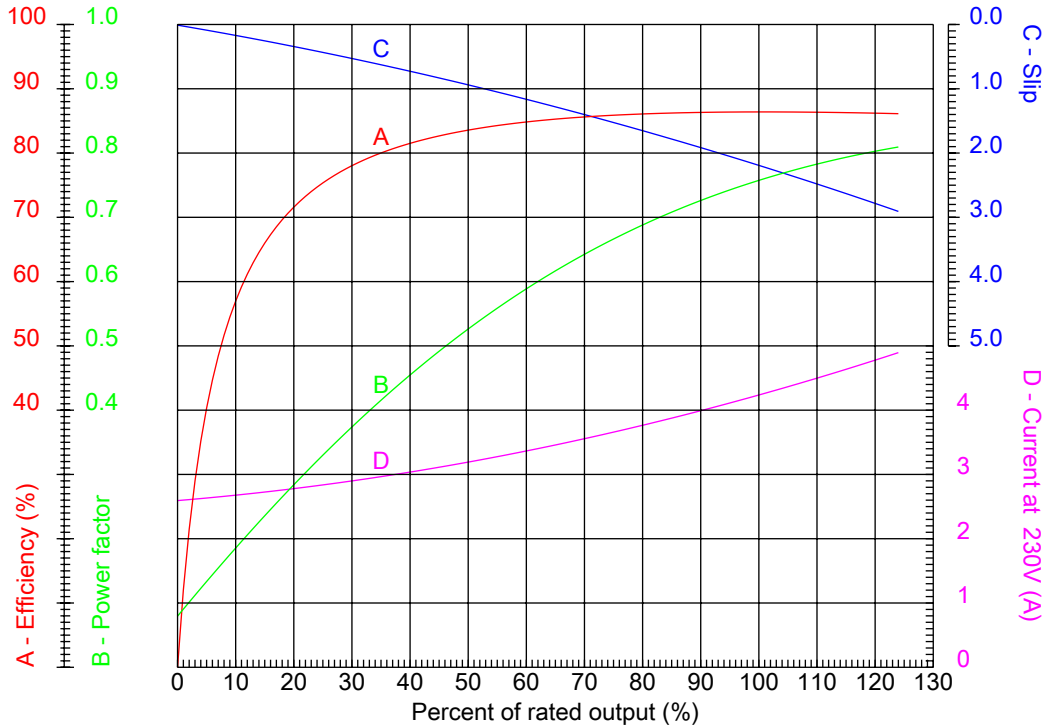

Customer :
Product line : Three Phase: W01 (Rolled Steel) - ODP - Premium Efficiency (DOE)

| | |
|----------------------------------|--|
| Frame : 56H | Locked rotor current (I _l /I _n) : 8.8 |
| Output : 1.5 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 1760 rpm | Design : A |
| Voltage : 208-230/460 V | Locked rotor torque : 290 % |
| Rated current : 4.64-4.20/2.10 A | Breakdown torque : 350 % |
| Insulation class : F | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00158OT3E56CFL-S

Performed by

Checked