




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

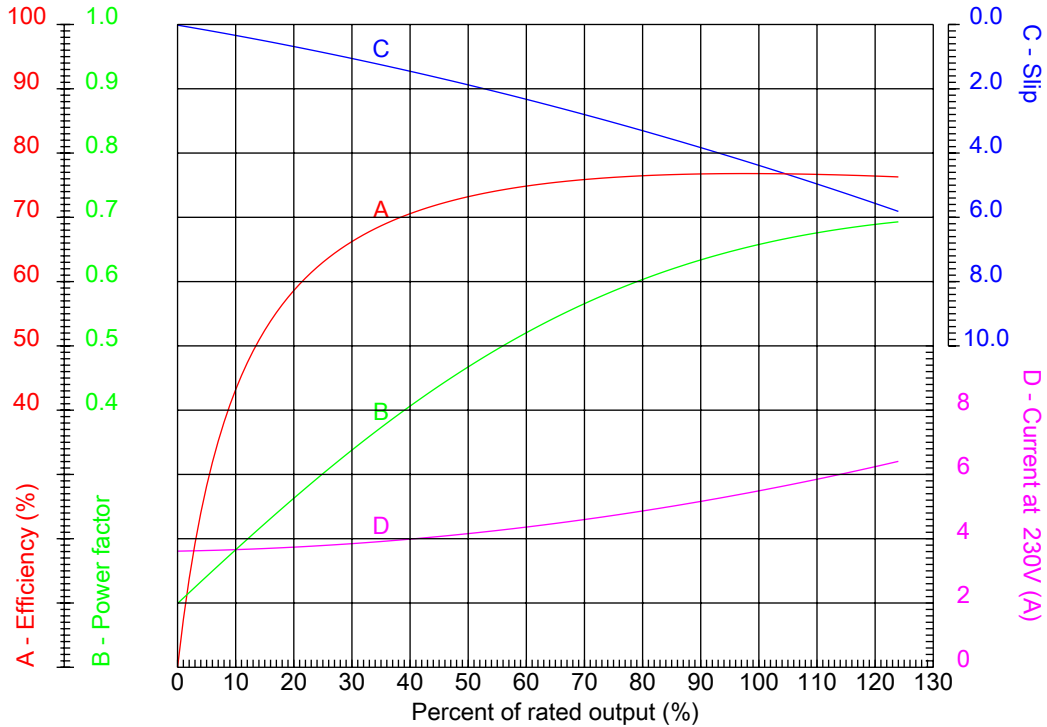

Customer :
 Product line : Three-Phase : Explosion Proof - High Efficiency

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 184T | Locked rotor current (I _L /I _n) | : 5.5 |
| Output | : 1.5 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 860 rpm | Design | : B |
| Voltage | : 208-230/460 V | Locked rotor torque | : 250 % |
| Rated current | : 6.00-5.43/2.71 A | Breakdown torque | : 260 % |
| Insulation class | : F | | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #00159XP3E184T

Performed by

Checked