




Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

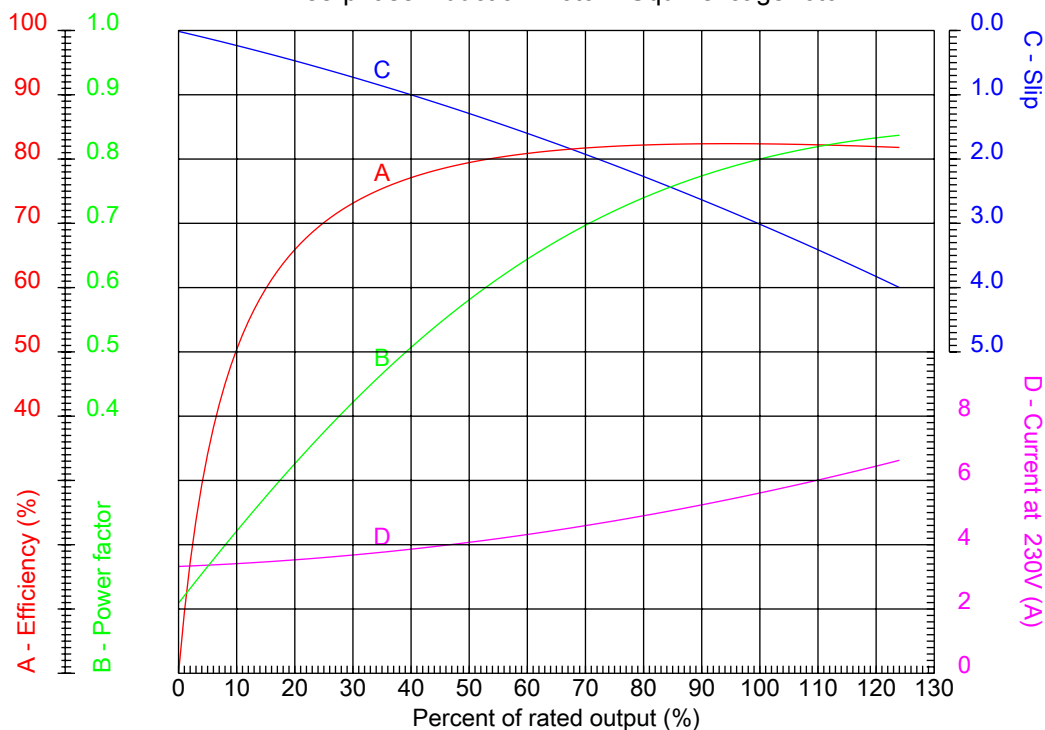

Customer :
Product line : Three Phase: W01 (Rolled Steel) - TEFC - Standard Efficiency

| | | | |
|------------------|--------------------|--|---------|
| Frame | : 56H | Locked rotor current (I _L /I _n) | : 7.3 |
| Output | : 2 HP | Duty cycle | : S1 |
| Frequency | : 60 Hz | Service factor | : 1.15 |
| Full load speed | : 1745 rpm | Design | : A |
| Voltage | : 208-230/460 V | Locked rotor torque | : 240 % |
| Rated current | : 6.30-5.70/2.85 A | Breakdown torque | : 270 % |
| Insulation class | : F | | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00218ES3E56-S

Performed by

Checked