




# Dealers Industrial Equipment

No.:

Date: 12-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

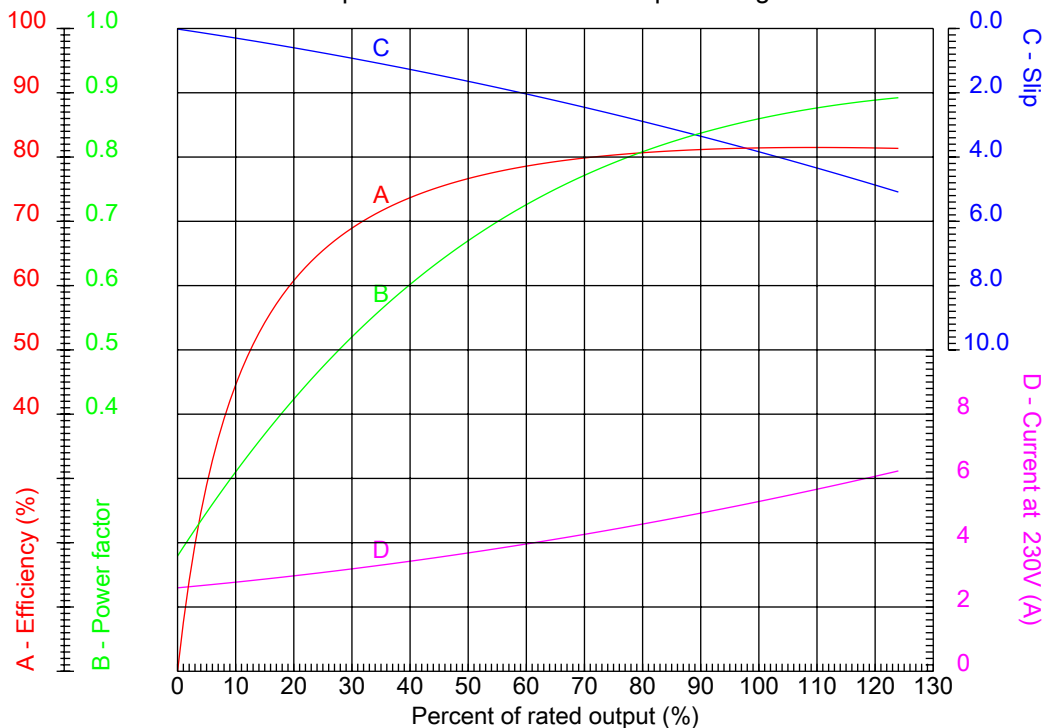

Customer :  
 Product line : Three-Phase : NEMA 56 Frames - TEFC

Frame : D56	Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) : 9.0
Output : 2 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15 (1.00 at 208V)
Full load speed : 3460 rpm	Design : A
Voltage : 208-230/460 V	Locked rotor torque : 420 %
Rated current : 5.75-5.40/2.70 A	Breakdown torque : 400 %
Insulation class : F	

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #00236ES3ED56CFL

Performed by

Checked