




Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

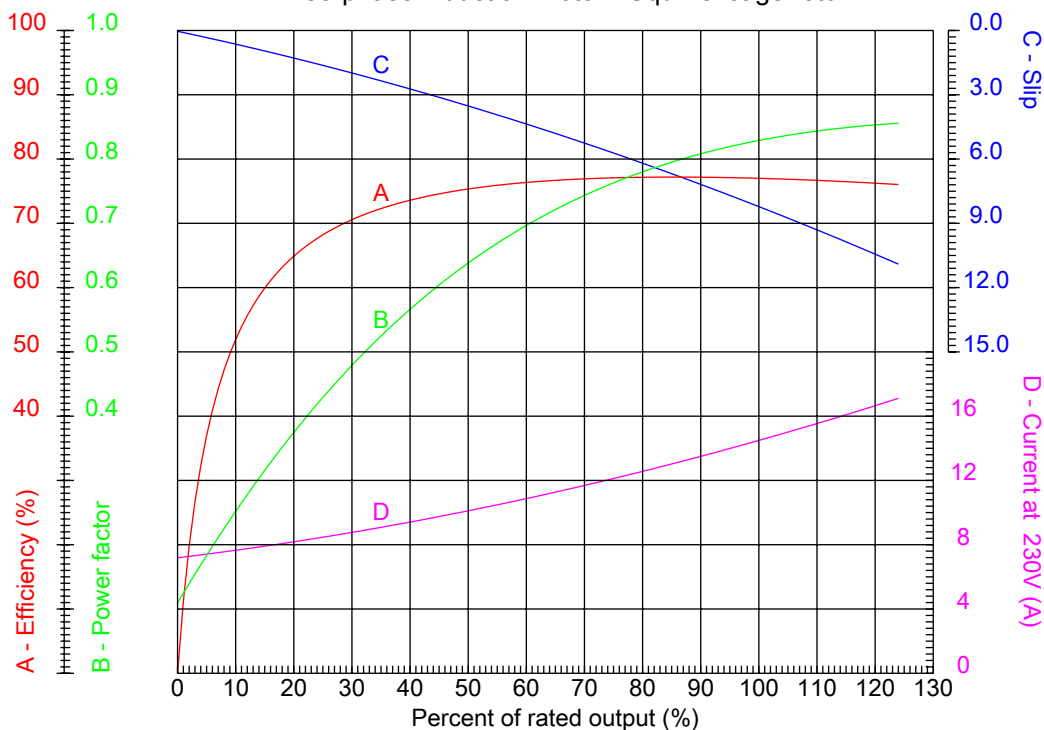

Customer :
 Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame : 256T	Locked rotor current (I _L /I _n) : 6.3
Output : 5 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 825 rpm	Design : D
Voltage : 208-230/460 V	Locked rotor torque : 300 %
Rated current : 16.0-14.5/7.25 A	Breakdown torque : 0 %
Insulation class : F	

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #00509ES3EOW256T

Performed by

Checked