




Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

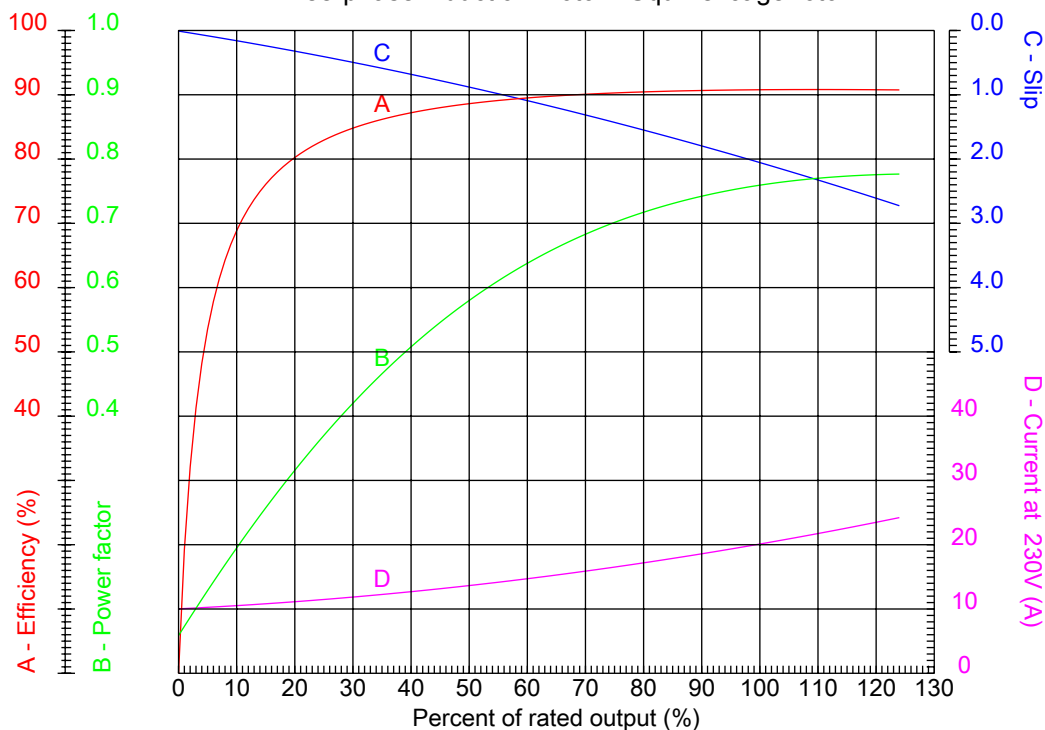

Customer :
Product line : W01 (Rolled Steel) General Purpose TEFC

| | |
|----------------------------------|--|
| Frame : 254/6T | Locked rotor current (I _L /I _n) : 5.4 |
| Output : 7.5 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 1175 rpm | Design : B |
| Voltage : 208-230/460 V | Locked rotor torque : 200 % |
| Rated current : 22.1-20.0/9.98 A | Breakdown torque : 230 % |
| Insulation class : F | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #00712ET3E254T-SG

Performed by

Checked