




Dealers Industrial Equipment

No.:

Date: 13-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT Three-phase induction motor - Squirrel cage rotor

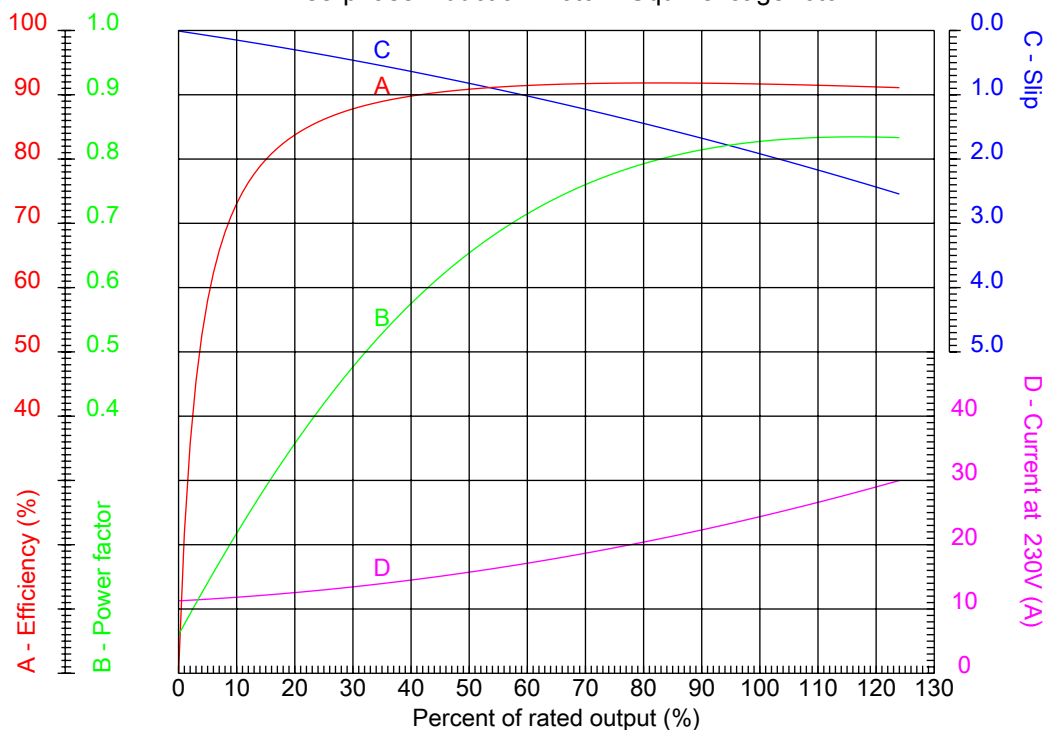

Customer :
Product line : W22 NEMA Premium - Ball Bearings

| | |
|----------------------------------|--|
| Frame : 213/5T | Locked rotor current (I _l /I _n) : 6.4 |
| Output : 10 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.25 |
| Full load speed : 1765 rpm | Design : B |
| Voltage : 208-230/460 V | Locked rotor torque : 200 % |
| Rated current : 27.4-24.8/12.4 A | Breakdown torque : 300 % |
| Insulation class : F | |

Notes:
Downloaded from <http://dealerselectric.com>
Generated for Model #01018ET3E215TC-W22

Performed by

Checked