




# Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

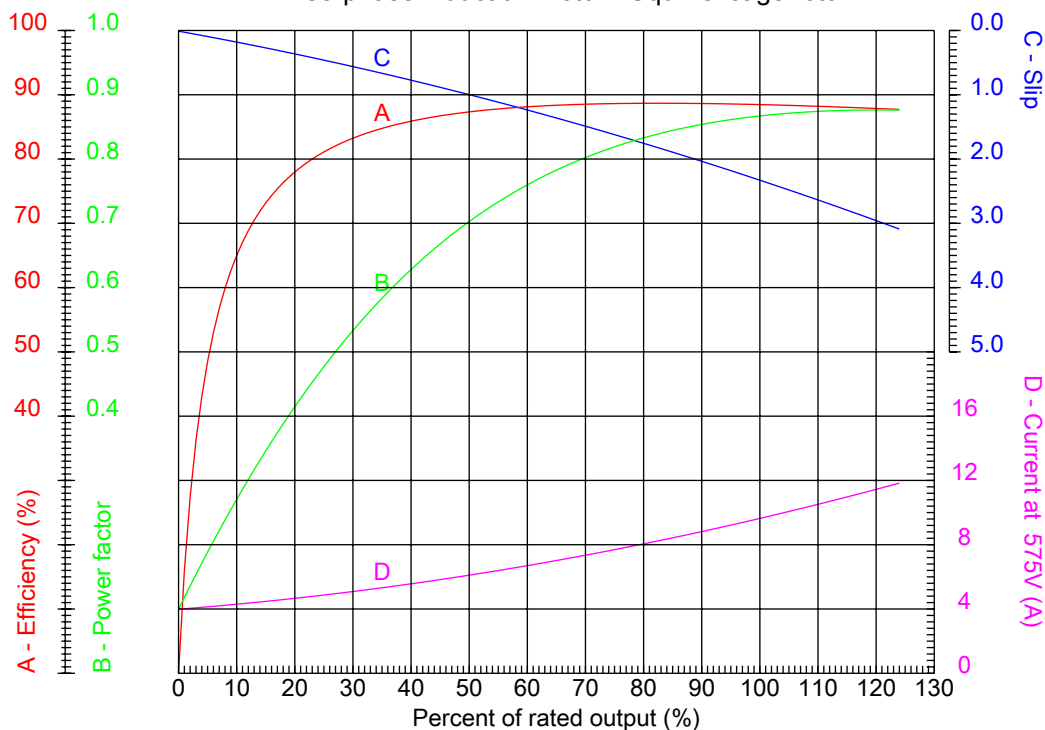

Customer :  
 Product line : Fire Pump Motors - ODP Three Phase - Foot Mount and Flange Mount

|                            |  |
|----------------------------|--|
| Frame : 213/5T             | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) : 6.6 |
| Output : 10 HP             | Duty cycle : S1  |
| Frequency : 60 Hz          | Service factor : 1.15  |
| Full load speed : 3515 rpm | Design : B   |
| Voltage : 575 V            | Locked rotor torque : 210 %                                  |
| Rated current : 9.76 A     | Breakdown torque : 250 %                                     |
| Insulation class : F       |  |

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #01036OP3HFP213TC

Performed by

Checked