




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

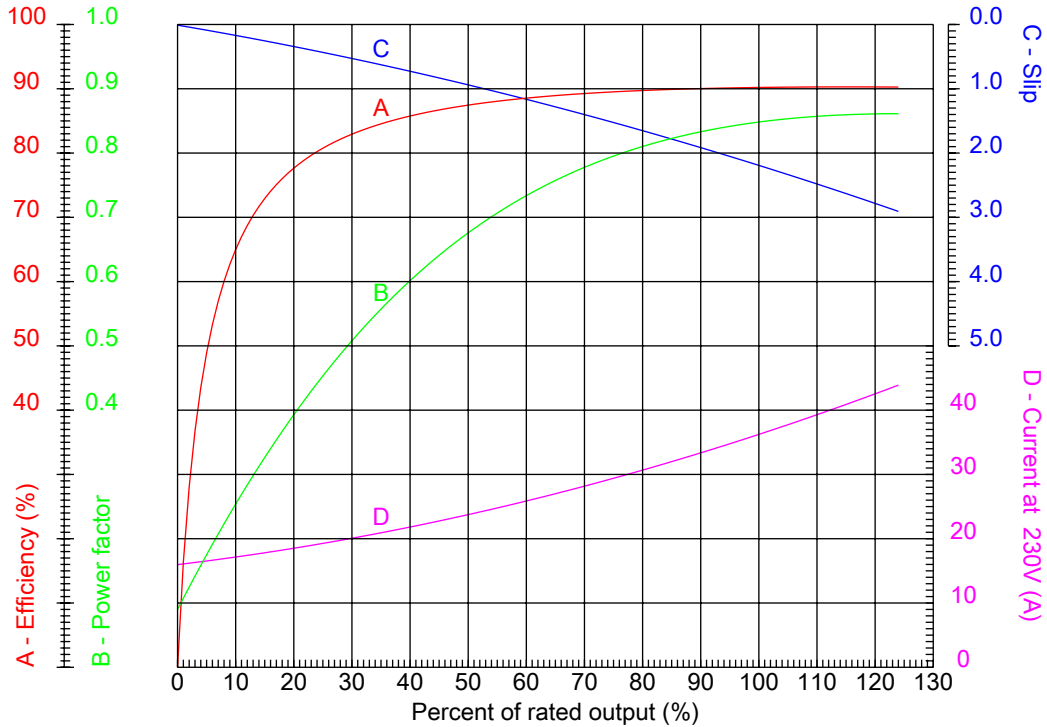

Customer :
 Product line : Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JM" Type - TEFC - High Efficiency

| | |
|----------------------------------|--|
| Frame : 254/6JM | Locked rotor current (I _l /I _n) : 6.6 |
| Output : 15 HP | Duty cycle : S1 |
| Frequency : 60 Hz | Service factor : 1.15 |
| Full load speed : 3520 rpm | Design : B |
| Voltage : 208-230/460 V | Locked rotor torque : 190 % |
| Rated current : 39.8-36.0/18.0 A | Breakdown torque : 280 % |
| Insulation class : F | |

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #01536EP3E254JM-S

Performed by

Checked