




# Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

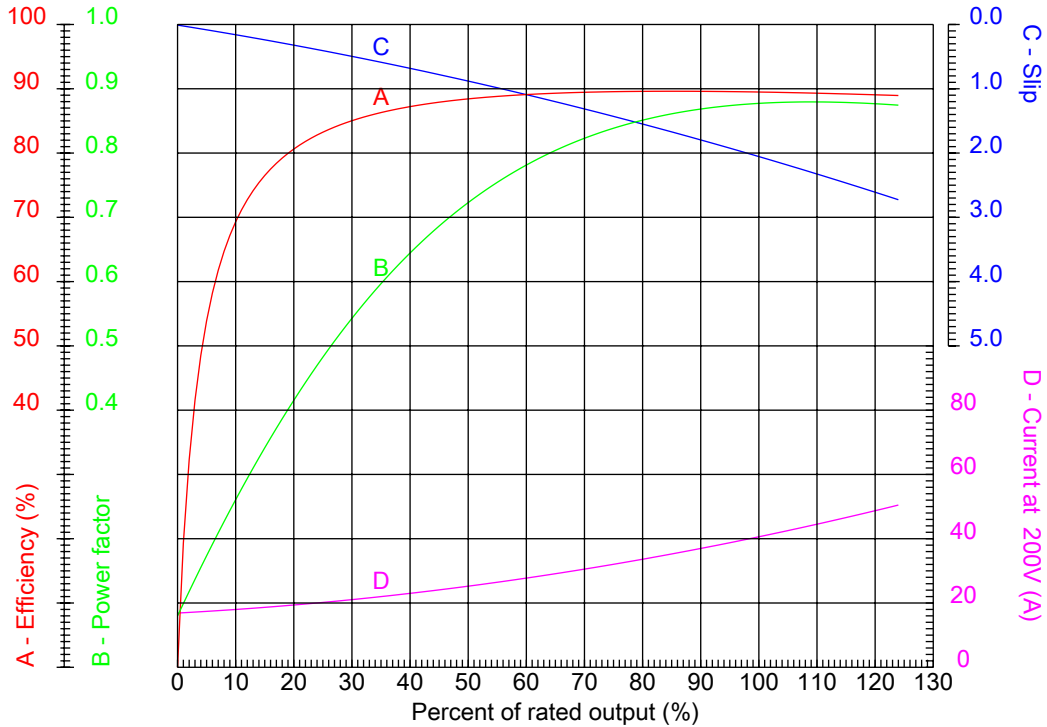

Customer :  
 Product line : Close Coupled Pump: Three-Phase - W01 (Rolled Steel) "JP" Type - ODP - High Efficiency

|                  |               |  |         |
|------------------|---------------|--|---------|
| Frame            | : 213/5JP     | Locked rotor current (I <sub>l</sub> /I <sub>n</sub> ) | : 6.5   |
| Output           | : 15 HP       | Duty cycle   | : S1    |
| Frequency        | : 60 Hz       | Service factor   | : 1.15  |
| Full load speed  | : 3525 rpm    | Design   | : B     |
| Voltage          | : 200/400 V   | Locked rotor torque                                    | : 190 % |
| Rated current    | : 40.3/20.1 A | Breakdown torque                                       | : 260 % |
| Insulation class | : F           |  |         |

Notes:  
 Downloaded from <http://dealerselectric.com>  
 Generated for Model #01536OP3V215JP-S

Performed by

Checked