




Dealers Industrial Equipment

No.:

Date: 23-SEP-2016

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

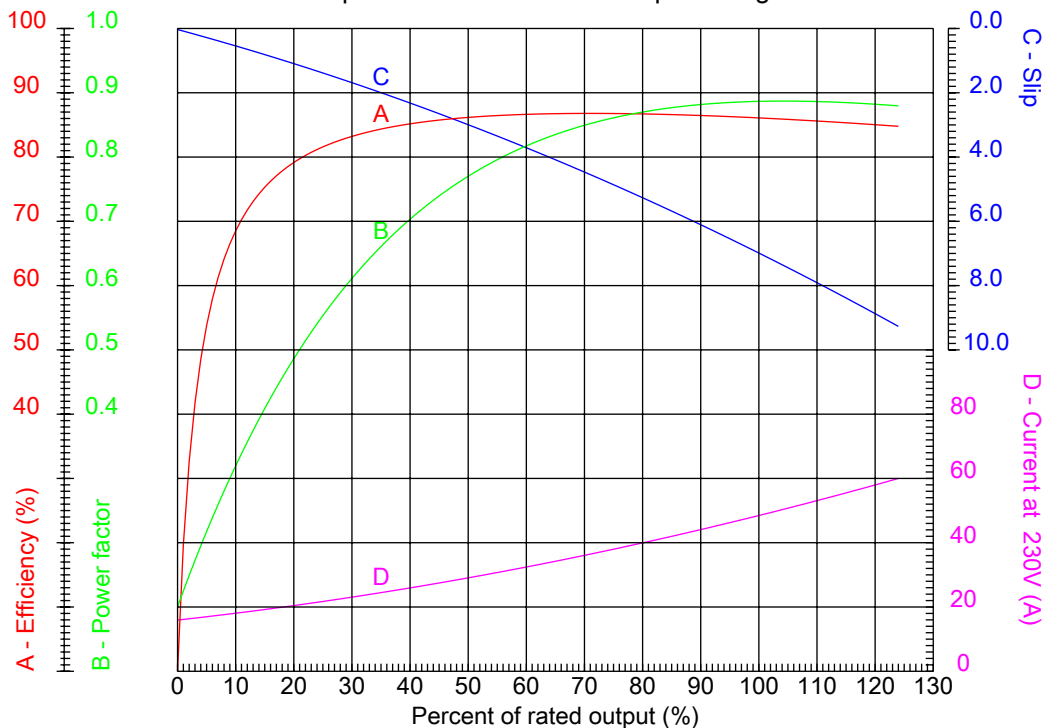

Customer :
 Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame : 286T	Locked rotor current (I _l /I _n) : 6.7
Output : 20 HP	Duty cycle : S1
Frequency : 60 Hz	Service factor : 1.15
Full load speed : 1115 rpm	Design : D
Voltage : 208-230/460 V	Locked rotor torque : 320 %
Rated current : 54.4-49.2/24.6 A	Breakdown torque : 0 %
Insulation class : F	

Notes:
 Downloaded from <http://dealerselectric.com>
 Generated for Model #02012ES3EOW286T

Performed by

Checked